




FLUKE®

Calibration

**The 5700A/5720A Series II
High Performance
Multifunction Calibrators
Extended Specifications**



5720A Calibrator

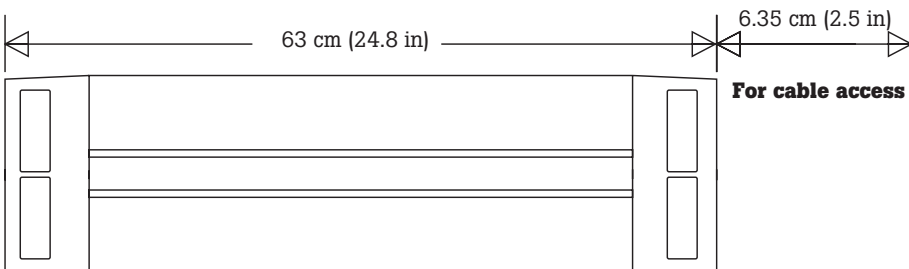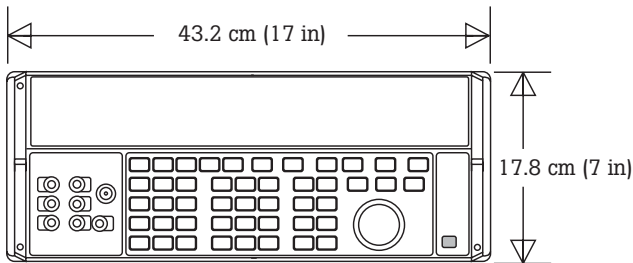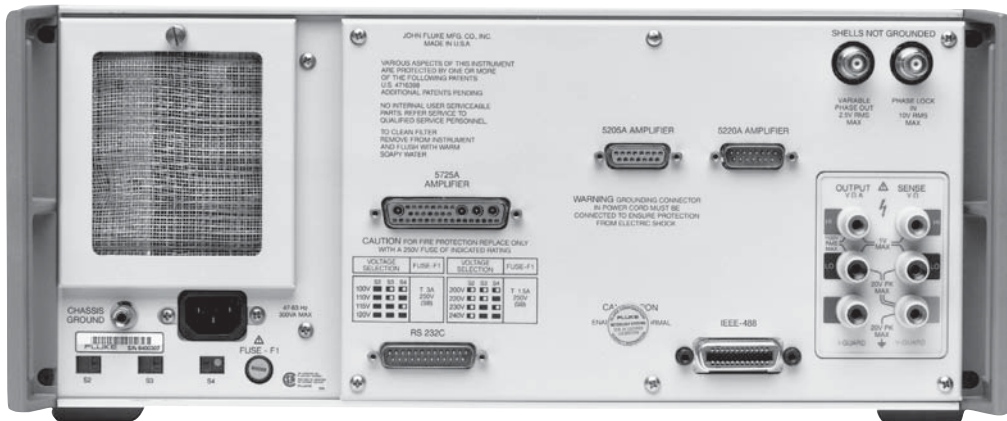

General Specifications

Warm-Up Time Twice the time since last warmed up, to a maximum of 30 minutes.
System Installation Rear output configuration and rack- mount kit available.
Standard Interfaces IEEE-488, RS-232, 5725A, 5205A or 5215A, 5220A, phase lock in (BNC), phase reference out (BNC).

Temperature Performance

Operating 0 °C to 50 °C
 Calibration 15 °C to 35 °C
 Storage -40 °C to 75 °C

Relative Humidity

Operating <80 % to 30 °C, <70 % to 40 °C, <40 % to 50 °C
 Storage <95 %, non-condensing. A power stabilization period of four days may be required after extended storage at high temperature and humidity.

Safety Complies with IEC61010-1, (2nd Edition), CAN/CSA-C22.2 No. 61010-1-04, and UL Std. No. 61010-1 (2nd Edition)

Operating Altitude 2000 m

Pollution Degree 2

Guard Isolation 20 V

EMI/RFI Designed to comply with FCC Rules Part 15, Subpart B, Class B; EN50081-1, EN50082-1

ElectroStatic Discharge This instrument meets criteria C for ESD requirements per EN61326

Line Power

Line Frequency 47 to 63 Hz; ±10 % 100 V, 110 V, 115 V, 120 V, 200 V, 220 V, 230 V, 240 V

Maximum Power
 5700A/5720A 300 VA
 5725A 750 VA

Weight

5700A/5720A 27 kg (62 lb)
 5725A 32 kg (70 lb)

Size

5700A/5720A
 Height 17.8 cm (7 in), standard rack increment, plus 1.5 cm (0.6 in) for feet
 Width 43.2 cm (17 in), standard rack width
 Depth 63.0 cm (24.8 in), overall; 57.8 cm (22.7 in), rack depth

5725A
 Height 13.3 cm (5.25 in)
 Width and Depth Same as 5700A/5720A. Both units project 5.1 cm (2 in) from rack front.

Artifact Calibration Standards Requirements

Calibrating the 5700A Series II and 5720A to full specified absolute uncertainty requires using the following external standards, each with an uncertainty that is within the stated uncertainty limit.

| Fluke Standard | Traceable Quantity | Nominal Value | Uncertainty Limit | 5700A/5720A Series II Specifications Susceptible to Uncertainty Limit |
|----------------|--------------------|---------------|-------------------|---|
| 732B | Voltage | 10 V | ±1.5 ppm | dc volts, ac volts, dc current, ac current |
| 742A-1 | Resistance | 1 Ω | ±10 ppm | 1 Ω, 1.9 Ω |
| 742A-10k | Resistance | 10 kΩ | ±4 ppm | ac current, dc current 10 Ω to 100 MΩ |

Electrical Specifications

Note

Fluke guarantees performance verification using specifications stated to 99% confidence level.

DC Voltage Specifications

5720A Series II DC Voltage Specifications

| Range | Resolution | Absolute Uncertainty ± 5 °C from calibration temperature ^[1] | | | | Relative Uncertainty ± 1 °C | |
|---|------------|--|-----------|-----------|-----------|--------------------------------|-----------|
| | | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| | | ± (ppm output + μV) | | | | | |
| 99 % Confidence Level | | | | | | | |
| 220 mV | 10 nV | 5 + 0.5 | 7 + 0.5 | 8 + 0.5 | 9 + 0.5 | 2 + 0.4 | 2.5 + 0.4 |
| 2.2 V | 100 nV | 3.5 + 0.8 | 4 + 0.8 | 4.5 + 0.8 | 6 + 0.8 | 2 + 0.8 | 2.5 + 0.8 |
| 11 V | 1 μV | 2.5 + 3 | 3 + 3 | 3.5 + 3 | 4 + 3 | 1 + 3 | 1.5 + 3 |
| 22 V | 1 μV | 2.5 + 5 | 3 + 5 | 3.5 + 5 | 4 + 5 | 1 + 5 | 1.5 + 5 |
| 220 V | 10 μV | 3.5 + 50 | 4 + 50 | 5 + 50 | 6 + 50 | 2 + 50 | 2.5 + 50 |
| 1100 V | 100 μV | 5 + 500 | 6 + 500 | 7 + 500 | 8 + 500 | 2.5 + 400 | 3 + 400 |
| 95 % Confidence Level | | | | | | | |
| 220 mV | 10 nV | 4 + 0.4 | 6 + 0.4 | 6.5 + 0.4 | 7.5 + 0.4 | 1.6 + 0.4 | 2 + 0.4 |
| 2.2 V | 100 nV | 3 + 0.7 | 3.5 + 0.7 | 4 + 0.7 | 5 + 0.7 | 1.6 + 0.7 | 2 + 0.7 |
| 11 V | 1 μV | 2 + 2.5 | 2.5 + 2.5 | 3 + 2.5 | 3.5 + 2.5 | 0.8 + 2.5 | 1.2 + 2.5 |
| 22 V | 1 μV | 2 + 4 | 2.5 + 4 | 3 + 4 | 3.5 + 4 | 0.8 + 4 | 1.2 + 4 |
| 220 V | 10 μV | 3 + 40 | 3.5 + 40 | 4 + 40 | 5 + 40 | 1.6 + 40 | 2 + 40 |
| 1100 V | 100 μV | 4 + 400 | 4.5 + 400 | 6 + 400 | 6.5 + 400 | 2 + 400 | 2.4 + 400 |
| Notes: | | | | | | | |
| DC Zeros calibration required every 30 days. | | | | | | | |
| 1. For fields strengths >1 V/m but ≤3 V/m, in the band of 80 MHz to 1 GHz, add 0.01 % of range. | | | | | | | |

5700A Series II DC Voltage Specifications

| Range | Resolution | Absolute Uncertainty ± 5 °C from calibration temperature ^[1] | | | | Relative Uncertainty ± 1 °C | |
|---|------------|--|---------|----------|----------|--------------------------------|-----------|
| | | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| | | ± (ppm output + μV) | | | | | |
| 99 % Confidence Level | | | | | | | |
| 220 mV | 10 nV | 6.5 + .75 | 7 + .75 | 8 + .75 | 9 + .8 | 2.5 + .5 | 4 + .5 |
| 2.2 V | 100 nV | 3.5 + 1.2 | 6 + 1.2 | 7 + 1.2 | 8 + 1.2 | 2.5 + 1.2 | 4 + 1.2 |
| 11 V | 1 μV | 3.5 + 3 | 5 + 4 | 7 + 4 | 8 + 4 | 1.5 + 3 | 3.5 + 4 |
| 22 V | 1 μV | 3.5 + 6 | 5 + 8 | 7 + 8 | 8 + 8 | 1.5 + 6 | 3.5 + 8 |
| 220 V | 10 μV | 5 + 100 | 6 + 100 | 8 + 100 | 9 + 100 | 2.5 + 100 | 4 + 100 |
| 1100 V | 100 μV | 7 + 600 | 8 + 600 | 10 + 600 | 11 + 600 | 3 + 600 | 4.5 + 600 |
| 95 % Confidence Level | | | | | | | |
| 220 mV | 10 nV | 5.5 + 0.6 | 6 + 0.6 | 7 + 0.6 | 8 + 0.6 | 2 + 0.4 | 3.5 + 0.4 |
| 2.2 V | 100 nV | 3.5 + 1 | 5 + 1 | 6 + 1 | 7 + 1 | 2 + 1 | 3.5 + 1 |
| 11 V | 1 μV | 3 + 3.5 | 4 + 3.5 | 6 + 3.5 | 7 + 3.5 | 1.2 + 3 | 3 + 3.5 |
| 22 V | 1 μV | 3 + 6.5 | 4 + 6.5 | 6 + 6.5 | 7 + 6.5 | 1.2 + 6 | 3 + 7 |
| 220 V | 10 μV | 4 + 80 | 5 + 80 | 7 + 80 | 8 + 80 | 2 + 80 | 3.5 + 80 |
| 1100 V | 100 μV | 6 + 500 | 7 + 500 | 8 + 500 | 9 + 500 | 2.4 + 500 | 4 + 500 |
| Notes: | | | | | | | |
| DC Zeros calibration required every 30 days. | | | | | | | |
| 1. For fields strengths >1 V/m but ≤3 V/m, in the band of 80 MHz to 1 GHz, add 0.01 % of range. | | | | | | | |

DC Voltage Secondary Performance Specifications and Operating Characteristics

| Range | Stability ^[1] ± 1 °C 24 Hours | Temperature Coefficient Adder ^[2] | | Linearity ± 1 °C | Noise | |
|--|--|---|--------------------------------|---------------------|---------------------------------|-------------------------------------|
| | | 10 - 40 °C | 0 - 10 °C and 40 - 50 °C | | Bandwidth 0.1-10 Hz pk-pk | Bandwidth 10 Hz-10 kHz RMS |
| | | ± (ppm output + μV) / °C | | | ± (ppm output + μV) | |
| 220 mV | 0.3 + 0.3 | 0.4 + 0.1 | 1.5 + 0.5 | 1 + 0.2 | 0.15 + 0.1 | 5 |
| 2.2 V | 0.3 + 1 | 0.3 + 0.1 | 1.5 + 2 | 1 + 0.6 | 0.15 + 0.4 | 15 |
| 11 V | 0.3 + 2.5 | 0.15 + 0.2 | 1 + 1.5 | 0.3 + 2 | 0.15 + 2 | 50 |
| 22 V | 0.4 + 5 | 0.2 + 0.4 | 1.5 + 3 | 0.3 + 4 | 0.15 + 4 | 50 |
| 220 V | 0.5 + 40 | 0.3 + 5 | 1.5 + 40 | 1 + 40 | 0.15 + 60 | 150 |
| 1100 V | 0.5 + 200 | 0.5 + 10 | 3 + 200 | 1 + 200 | 0.15 + 300 | 500 |
| Notes: | | | | | | |
| 1. Stability specifications are included in the Absolute Uncertainty values in the primary specification tables. | | | | | | |
| 2. Temperature coefficient is an adder to uncertainty specifications that does <i>not</i> apply unless operating more than ±5 °C from calibration temperature. | | | | | | |

- Minimum Output**0 V for all ranges, except 100 V for 1100 V range
- Maximum Load**50 mA for 2.2 V through 220 V ranges; 20 mA for 1100 V range; 50 Ω output impedance on 220 mV range; all ranges <1000 pF, >25 Ω
- Load Regulation**<(0.2 ppm of output + 0.1 ppm of range), full load to no load
- Line Regulation**<0.1 ppm change, ± 10 % of selected nominal line
- Settling Time**3 seconds to full accuracy; + 1 second for range or polarity change; + 1 second for 1100 V range
- Overshoot**<5 %
- Common Mode Rejection**140 dB, DC to 400 Hz
- Remote Sensing**Available 0 V to ±1100 V, on 2.2 V through 1100 V ranges

AC Voltage Specifications

5720A Series II AC Voltage Specifications: 99% Confidence Level

| Range | Resolution | Frequency (Hz) | Absolute Uncertainty ± 5 °C from calibration temperature | | | | Relative Uncertainty ± 1 °C | |
|---|-------------|----------------|---|--------------|-------------|-------------|--------------------------------|-----------|
| | | | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| | | | ± (ppm output + μV) | | | | | |
| 2.2 mV | 1 nV | 10 - 20 | 250 + 5 | 270 + 5 | 290 + 5 | 300 + 5 | 250 + 5 | 270 + 5 |
| | | 20 - 40 | 100 + 5 | 105 + 5 | 110 + 5 | 115 + 5 | 100 + 5 | 105 + 5 |
| | | 40 - 20 k | 85 + 5 | 90 + 5 | 95 + 5 | 100 + 5 | 60 + 5 | 65 + 5 |
| | | 20 k - 50 k | 220 + 5 | 230 + 5 | 240 + 5 | 250 + 5 | 85 + 5 | 95 + 5 |
| | | 50 k - 100 k | 500 + 6 | 540 + 6 | 570 + 6 | 600 + 6 | 200 + 6 | 220 + 6 |
| | | 100 k - 300 k | 1000 + 12 | 1200 + 12 | 1250 + 12 | 1300 + 12 | 350 + 12 | 400 + 12 |
| 300 k - 500 k | 1400 + 25 | 1500 + 25 | 1600 + 25 | 1700 + 25 | 800 + 25 | 1000 + 25 | | |
| 500 k - 1 M | 2900 + 25 | 3100 + 25 | 3250 + 25 | 3400 + 25 | 2700 + 25 | 3000 + 25 | | |
| 22 mV | 10 nV | 10 - 20 | 250 + 5 | 270 + 5 | 290 + 5 | 300 + 5 | 250 + 5 | 270 + 5 |
| | | 20 - 40 | 100 + 5 | 105 + 5 | 110 + 5 | 115 + 5 | 100 + 5 | 105 + 5 |
| | | 40 - 20 k | 85 + 5 | 90 + 5 | 95 + 5 | 100 + 5 | 60 + 5 | 65 + 5 |
| | | 20 k - 50 k | 220 + 5 | 230 + 5 | 240 + 5 | 250 + 5 | 85 + 5 | 95 + 5 |
| | | 50 k - 100 k | 500 + 6 | 540 + 6 | 570 + 6 | 600 + 6 | 200 + 6 | 220 + 6 |
| | | 100 k - 300 k | 1000 + 12 | 1200 + 12 | 1250 + 12 | 1300 + 12 | 350 + 12 | 400 + 12 |
| 300 k - 500 k | 1400 + 25 | 1500 + 25 | 1600 + 25 | 1700 + 25 | 800 + 25 | 1000 + 25 | | |
| 500 k - 1 M | 2900 + 25 | 3100 + 25 | 3250 + 25 | 3400 + 25 | 2700 + 25 | 3000 + 25 | | |
| 220 mV | 100 nV | 10 - 20 | 250 + 15 | 270 + 15 | 290 + 15 | 300 + 15 | 250 + 15 | 270 + 15 |
| | | 20 - 40 | 100 + 8 | 105 + 8 | 110 + 8 | 115 + 8 | 100 + 8 | 105 + 8 |
| | | 40 - 20 k | 85 + 8 | 90 + 8 | 95 + 8 | 100 + 8 | 60 + 8 | 65 + 8 |
| | | 20 k - 50 k | 220 + 8 | 230 + 8 | 240 + 8 | 250 + 8 | 85 + 8 | 95 + 8 |
| | | 50 k - 100 k | 500 + 20 | 540 + 20 | 570 + 20 | 600 + 20 | 200 + 20 | 220 + 20 |
| | | 100 k - 300 k | 850 + 25 | 900 + 25 | 1000 + 25 | 1100 + 25 | 350 + 25 | 400 + 25 |
| 300 k - 500 k | 1400 + 30 | 1500 + 30 | 1600 + 30 | 1700 + 30 | 800 + 30 | 1000 + 30 | | |
| 500 k - 1 M | 2700 + 60 | 2900 + 60 | 3100 + 60 | 3300 + 60 | 2600 + 60 | 2800 + 60 | | |
| 2.2 V | 1 μV | 10 - 20 | 250 + 50 | 270 + 50 | 290 + 50 | 300 + 50 | 250 + 50 | 270 + 50 |
| | | 20 - 40 | 95 + 20 | 100 + 20 | 105 + 20 | 110 + 20 | 95 + 20 | 100 + 20 |
| | | 40 - 20 k | 45 + 10 | 47 + 10 | 50 + 10 | 52 + 10 | 30 + 10 | 40 + 10 |
| | | 20 k - 50 k | 80 + 12 | 85 + 12 | 87 + 12 | 90 + 12 | 70 + 12 | 75 + 12 |
| | | 50 k - 100 k | 120 + 40 | 125 + 40 | 127 + 40 | 130 + 40 | 100 + 40 | 105 + 40 |
| | | 100 k - 300 k | 380 + 100 | 420 + 100 | 460 + 100 | 500 + 100 | 270 + 100 | 290 + 100 |
| 300 k - 500 k | 1000 + 250 | 1100 + 250 | 1150 + 250 | 1200 + 250 | 900 + 250 | 1000 + 250 | | |
| 500 k - 1 M | 1600 + 400 | 1800 + 600 | 1900 + 400 | 2000 + 400 | 1200 + 400 | 1300 + 400 | | |
| 22 V | 10 μV | 10 - 20 | 250 + 500 | 270 + 500 | 290 + 500 | 300 + 500 | 250 + 500 | 270 + 500 |
| | | 20 - 40 | 95 + 200 | 100 + 200 | 105 + 200 | 110 + 200 | 95 + 200 | 100 + 200 |
| | | 40 - 20 k | 45 + 70 | 47 + 70 | 50 + 70 | 52 + 70 | 30 + 70 | 40 + 70 |
| | | 20 k - 50 k | 80 + 120 | 85 + 120 | 87 + 120 | 90 + 120 | 70 + 120 | 75 + 120 |
| | | 50 k - 100 k | 110 + 250 | 115 + 250 | 117 + 250 | 120 + 250 | 100 + 250 | 105 + 250 |
| | | 100 k - 300 k | 300 + 800 | 310 + 800 | 320 + 800 | 325 + 800 | 270 + 800 | 290 + 800 |
| 300 k - 500 k | 1000 + 2500 | 1100 + 2500 | 1150 + 2500 | 1200 + 2500 | 900 + 2500 | 1000 + 2500 | | |
| 500 k - 1 M | 1500 + 4000 | 1600 + 4000 | 1700 + 4000 | 1800 + 4000 | 1300 + 4000 | 1400 + 4000 | | |
| | | | ± (ppm output + mV) | | | | | |
| 220 V ^[2] | 100 μV | 10 - 20 | 250 + 5 | 270 + 5 | 290 + 5 | 300 + 5 | 250 + 5 | 270 + 5 |
| | | 20 - 40 | 95 + 2 | 100 + 2 | 105 + 2 | 110 + 2 | 95 + 2 | 100 + 2 |
| | | 40 - 20 k | 57 + 0.7 | 60 + 0.7 | 62 + 0.7 | 65 + 0.7 | 45 + 0.7 | 50 + 0.7 |
| | | 20 k - 50 k | 90 + 1.2 | 95 + 1.2 | 97 + 1.2 | 100 + 1.2 | 75 + 1.2 | 80 + 1.2 |
| | | 50 k - 100 k | 160 + 3 | 170 + 3 | 175 + 3 | 180 + 3 | 140 + 3 | 150 + 3 |
| | | 100 k - 300 k | 900 + 20 | 1000 + 20 | 1050 + 20 | 1100 + 20 | 600 + 20 | 700 + 20 |
| 300 k - 500 k | 5000 + 50 | 5200 + 50 | 5300 + 50 | 5400 + 50 | 4500 + 50 | 4700 + 50 | | |
| 500 k - 1 M | 8000 + 100 | 9000 + 100 | 9500 + 100 | 10,000 + 100 | 8000 + 100 | 8500 + 100 | | |
| 1100 V ^[1] | 1 mV | 15 - 50 | 300 + 20 | 320 + 20 | 340 + 20 | 360 + 20 | 300 + 20 | 320 + 20 |
| | | 50 - 1 k | 70 + 4 | 75 + 4 | 80 + 4 | 85 + 4 | 50 + 4 | 55 + 4 |
| 5725A Amplifier: | | | | | | | | |
| 1100 V | 1 mV | 40 - 1 k | 75 + 4 | 80 + 4 | 85 + 4 | 90 + 4 | 50 + 4 | 55 + 4 |
| | | 1 k - 20 k | 105 + 6 | 125 + 6 | 135 + 6 | 165 + 6 | 85 + 6 | 105 + 6 |
| | | 20 k - 30 k | 230 + 11 | 360 + 11 | 440 + 11 | 600 + 11 | 160 + 11 | 320 + 11 |
| 750 V | | 30 k - 50 k | 230 + 11 | 360 + 11 | 440 + 11 | 600 + 11 | 160 + 11 | 320 + 11 |
| | | 50 k - 100k | 600 + 45 | 1300 + 45 | 1600 + 45 | 2300 + 45 | 380 + 45 | 1200 + 45 |
| Notes: | | | | | | | | |
| 1. Maximum output 250 V from 15-50 Hz. | | | | | | | | |
| 2. See Volt-Hertz capability in Figure A. | | | | | | | | |

5720A Series II AC Voltage Specifications: 95 % Confidence Level

| Range | Resolution | Frequency (Hz) | Absolute Uncertainty ± 5 °C from calibration temperature | | | | Relative Uncertainty ± 1 °C | |
|---|-------------|----------------|---|-------------|-------------|-------------|--------------------------------|-----------|
| | | | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| | | | ± (ppm output + μV) | | | | | |
| 2.2 mV | 1 nV | 10 - 20 | 200 + 4 | 220 + 4 | 230 + 4 | 240 + 4 | 200 + 4 | 220 + 4 |
| | | 20 - 40 | 80 + 4 | 85 + 4 | 87 + 4 | 90 + 4 | 80 + 4 | 85 + 4 |
| | | 40 - 20 k | 70 + 4 | 75 + 4 | 77 + 4 | 80 + 4 | 50 + 4 | 55 + 4 |
| | | 20 k - 50 k | 170 + 4 | 180 + 4 | 190 + 4 | 200 + 4 | 70 + 4 | 80 + 4 |
| | | 50 k - 100 k | 400 + 5 | 460 + 5 | 480 + 5 | 500 + 5 | 160 + 5 | 180 + 5 |
| | | 100 k - 300 k | 300 + 10 | 900 + 10 | 1000 + 10 | 1050 + 10 | 280 + 10 | 320 + 10 |
| 300 k - 500 k | 1100 + 20 | 1200 + 20 | 1300 + 20 | 1400 + 20 | 650 + 20 | 800 + 20 | | |
| 500 k - 1 M | 2400 + 20 | 2500 + 20 | 2600 + 20 | 2700 + 20 | 2100 + 20 | 2400 + 20 | | |
| 22 mV | 10 nV | 10 - 20 | 200 + 4 | 220 + 4 | 230 + 4 | 240 + 4 | 200 + 4 | 220 + 4 |
| | | 20 - 40 | 80 + 4 | 85 + 4 | 87 + 4 | 90 + 4 | 80 + 4 | 85 + 4 |
| | | 40 - 20 k | 70 + 4 | 75 + 4 | 77 + 4 | 80 + 4 | 50 + 4 | 55 + 4 |
| | | 20 k - 50 k | 170 + 4 | 180 + 4 | 190 + 4 | 200 + 4 | 70 + 4 | 80 + 4 |
| | | 50 k - 100 k | 400 + 5 | 460 + 5 | 480 + 5 | 500 + 5 | 160 + 5 | 180 + 5 |
| | | 100 k - 300 k | 300 + 10 | 900 + 10 | 1000 + 10 | 1050 + 10 | 280 + 10 | 320 + 10 |
| 300 k - 500 k | 1100 + 20 | 1200 + 20 | 1300 + 20 | 1400 + 20 | 650 + 20 | 800 + 20 | | |
| 500 k - 1 M | 2400 + 20 | 2500 + 20 | 2600 + 20 | 2700 + 20 | 2100 + 20 | 2400 + 20 | | |
| 220 mV | 100 nV | 10 - 20 | 200 + 12 | 220 + 12 | 230 + 12 | 240 + 12 | 200 + 12 | 220 + 12 |
| | | 20 - 40 | 80 + 7 | 85 + 7 | 87 + 7 | 90 + 7 | 80 + 7 | 85 + 7 |
| | | 40 - 20 k | 70 + 7 | 75 + 7 | 77 + 7 | 80 + 7 | 50 + 7 | 55 + 7 |
| | | 20 k - 50 k | 170 + 7 | 180 + 7 | 190 + 7 | 200 + 7 | 70 + 7 | 80 + 7 |
| | | 50 k - 100 k | 400 + 17 | 420 + 17 | 440 + 17 | 460 + 17 | 160 + 17 | 180 + 17 |
| | | 100 k - 300 k | 700 + 20 | 750 + 20 | 800 + 20 | 900 + 20 | 280 + 20 | 320 + 20 |
| 300 k - 500 k | 1100 + 25 | 1200 + 25 | 1300 + 25 | 1400 + 25 | 650 + 25 | 800 + 25 | | |
| 500 k - 1 M | 2400 + 45 | 2500 + 45 | 2600 + 45 | 2700 + 45 | 2100 + 45 | 2400 + 45 | | |
| 2.2 V | 1 μV | 10 - 20 | 200 + 40 | 220 + 40 | 230 + 40 | 240 + 40 | 200 + 40 | 220 + 40 |
| | | 20 - 40 | 75 + 15 | 80 + 15 | 85 + 15 | 90 + 15 | 75 + 15 | 80 + 15 |
| | | 40 - 20 k | 37 + 8 | 40 + 8 | 42 + 8 | 45 + 8 | 25 + 8 | 35 + 8 |
| | | 20 k - 50 k | 65 + 10 | 70 + 10 | 73 + 10 | 75 + 10 | 55 + 10 | 60 + 10 |
| | | 50 k - 100 k | 100 + 30 | 105 + 30 | 107 + 30 | 110 + 30 | 80 + 30 | 85 + 30 |
| | | 100 k - 300 k | 300 + 80 | 340 + 80 | 380 + 80 | 420 + 80 | 230 + 80 | 250 + 80 |
| 300 k - 500 k | 800 + 200 | 900 + 200 | 950 + 200 | 1000 + 200 | 700 + 200 | 800 + 200 | | |
| 500 k - 1 M | 1300 + 300 | 1500 + 300 | 1600 + 300 | 1700 + 300 | 1000 + 300 | 1100 + 300 | | |
| 22 V | 10 μV | 10 - 20 | 200 + 400 | 220 + 400 | 230 + 400 | 240 + 400 | 200 + 400 | 220 + 400 |
| | | 20 - 40 | 75 + 150 | 80 + 150 | 85 + 150 | 90 + 150 | 75 + 150 | 80 + 150 |
| | | 40 - 20k | 37 + 50 | 40 + 50 | 42 + 50 | 45 + 50 | 25 + 50 | 35 + 50 |
| | | 20k - 50k | 65 + 100 | 70 + 100 | 73 + 100 | 75 + 100 | 55 + 100 | 60 + 100 |
| | | 50k - 100k | 90 + 200 | 95 + 200 | 97 + 200 | 100 + 200 | 80 + 200 | 85 + 200 |
| | | 100k - 300k | 250 + 600 | 260 + 600 | 270 + 600 | 275 + 600 | 250 + 600 | 270 + 600 |
| 300k - 500k | 800 + 2000 | 900 + 2000 | 900 + 2000 | 1000 + 2000 | 700 + 2000 | 800 + 2000 | | |
| 500k - 1M | 1200 + 3200 | 1300 + 3200 | 1400 + 3200 | 1500 + 3200 | 1100 + 3200 | 1200 + 3200 | | |
| ± (ppm output + mV) | | | | | | | | |
| 220 V ^[2] | 100 μV | 10 - 20 | 200 + 4 | 220 + 4 | 230 + 4 | 240 + 4 | 200 + 4 | 220 + 4 |
| | | 20 - 40 | 75 + 1.5 | 80 + 1.5 | 85 + 1.5 | 90 + 1.5 | 75 + 1.5 | 80 + 1.5 |
| | | 40 - 20 k | 45 + 0.6 | 47 + 0.6 | 50 + 0.6 | 52 + 0.6 | 35 + 0.6 | 40 + 0.6 |
| | | 20 k - 50 k | 70 + 1 | 75 + 1 | 77 + 1 | 80 + 1 | 60 + 1 | 65 + 1 |
| | | 50 k - 100 k | 120 + 2.5 | 130 + 2.5 | 140 + 2.5 | 150 + 2.5 | 110 + 2.5 | 120 + 2.5 |
| | | 100 k - 300 k | 700 + 16 | 800 + 16 | 850 + 16 | 900 + 16 | 500 + 16 | 600 + 16 |
| 300 k - 500 k | 4000 + 40 | 4200 + 40 | 4300 + 40 | 4400 + 40 | 3600 + 40 | 3800 + 40 | | |
| 500 k - 1 M | 6000 + 80 | 7000 + 80 | 7500 + 80 | 8000 + 80 | 6500 + 80 | 7000 + 80 | | |
| 1100 V ^[1] | 1 mV | 15 - 50 | 240 + 16 | 260 + 16 | 280 + 16 | 300 + 16 | 240 + 16 | 260 + 16 |
| | | 50 - 1 k | 55 + 3.5 | 60 + 3.5 | 65 + 3.5 | 70 + 3.5 | 40 + 3.5 | 45 + 3.5 |
| 5725A Amplifier: | | | | | | | | |
| 1100 V | 1 mV | 40 - 1 k | 75 + 4 | 80 + 4 | 85 + 4 | 90 + 4 | 50 + 4 | 55 + 4 |
| | | 1 k - 20 k | 105 + 6 | 125 + 6 | 135 + 6 | 165 + 6 | 85 + 6 | 105 + 6 |
| | | 20 k - 30 k | 230 + 11 | 360 + 11 | 440 + 11 | 600 + 11 | 160 + 11 | 320 + 11 |
| 750 V | | 30 k - 50 k | 230 + 11 | 360 + 11 | 440 + 11 | 600 + 11 | 160 + 11 | 320 + 11 |
| | | 50 k - 100 k | 600 + 45 | 1300 + 45 | 1600 + 45 | 2300 + 45 | 380 + 45 | 1200 + 45 |
| Notes: | | | | | | | | |
| 1. Maximum output 250 V from 15-50 Hz. | | | | | | | | |
| 2. See Volt-Hertz capability in Figure A. | | | | | | | | |

5700A Series II AC Voltage Specifications: 99 % Confidence Level

| Range | Resolution | Frequency (Hz) | Absolute Uncertainty ± 5 °C from calibration temperature | | | | Relative Uncertainty ± 1 °C | |
|-----------------------|--------------|----------------|---|--------------|--------------|--------------|--------------------------------|-------------|
| | | | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| | | | ± (ppm output + μV) | | | | | |
| 2.2 mV | 1 nV | 10 - 20 | 500 + 5 | 550 + 5 | 600 + 5 | 600 + 5 | 500 + 5 | 550 + 5 |
| | | 20 - 40 | 200 + 5 | 220 + 5 | 230 + 5 | 240 + 5 | 200 + 5 | 220 + 5 |
| | | 40 - 20 k | 100 + 5 | 110 + 5 | 120 + 5 | 120 + 5 | 60 + 5 | 65 + 5 |
| | | 20 k - 50 k | 340 + 5 | 370 + 5 | 390 + 5 | 410 + 5 | 100 + 5 | 110 + 5 |
| | | 50 k - 100 k | 800 + 8 | 900 + 8 | 950 + 8 | 950 + 8 | 220 + 8 | 240 + 8 |
| | | 100 k - 300 k | 1100 + 15 | 1200 + 15 | 1300 + 15 | 1300 + 15 | 400 + 15 | 440 + 15 |
| | | 300 k - 500 k | 1500 + 30 | 1700 + 30 | 1700 + 30 | 1800 + 30 | 1000 + 30 | 1100 + 30 |
| | | 500 k - 1 M | 4000 + 40 | 4400 + 40 | 4700 + 40 | 4800 + 40 | 400 + 30 | 4400 + 30 |
| 22 mV | 10 nV | 10 - 20 | 500 + 6 | 550 + 6 | 600 + 6 | 600 + 6 | 500 + 6 | 550 + 6 |
| | | 20 - 40 | 200 + 6 | 220 + 6 | 230 + 6 | 240 + 6 | 200 + 6 | 220 + 6 |
| | | 40 - 20 k | 100 + 6 | 110 + 6 | 120 + 6 | 120 + 6 | 60 + 6 | 65 + 6 |
| | | 20 k - 50 k | 340 + 6 | 370 + 6 | 390 + 6 | 410 + 6 | 100 + 6 | 110 + 6 |
| | | 50 k - 100 k | 800 + 8 | 900 + 8 | 950 + 8 | 950 + 8 | 220 + 8 | 240 + 8 |
| | | 100 k - 300 k | 1100 + 15 | 1200 + 15 | 1300 + 15 | 1300 + 15 | 400 + 15 | 440 + 15 |
| | | 300 k - 500 k | 1500 + 30 | 1700 + 30 | 1700 + 30 | 1800 + 30 | 1000 + 30 | 1100 + 30 |
| | | 500 k - 1 M | 4000 + 40 | 4400 + 40 | 4700 + 40 | 4800 + 40 | 4000 + 30 | 4400 + 30 |
| 220 mV | 100 nV | 10 - 20 | 500 + 16 | 550 + 16 | 600 + 16 | 600 + 16 | 500 + 16 | 550 + 16 |
| | | 20 - 40 | 200 + 10 | 220 + 10 | 230 + 10 | 240 + 10 | 200 + 10 | 220 + 10 |
| | | 40 - 20 k | 95 + 10 | 100 + 10 | 110 + 10 | 110 + 10 | 60 + 10 | 65 + 10 |
| | | 20 k - 50 k | 300 + 10 | 330 + 10 | 350 + 10 | 360 + 10 | 100 + 10 | 110 + 10 |
| | | 50 k - 100 k | 750 + 30 | 800 + 30 | 850 + 30 | 900 + 30 | 220 + 30 | 240 + 30 |
| | | 100 k - 300 k | 940 + 30 | 1000 + 30 | 1100 + 30 | 1100 + 30 | 400 + 30 | 440 + 30 |
| | | 300 k - 500 k | 1500 + 40 | 1700 + 40 | 1700 + 40 | 1800 + 40 | 1000 + 40 | 1100 + 40 |
| | | 500 k - 1 M | 3000 + 100 | 3300 + 100 | 3500 + 100 | 3600 + 100 | 3000 + 100 | 3300 + 100 |
| 2.2 V | 1 μV | 10 - 20 | 500 + 100 | 550 + 100 | 600 + 100 | 600 + 100 | 500 + 100 | 550 + 100 |
| | | 20 - 40 | 150 + 30 | 170 + 30 | 170 + 30 | 180 + 30 | 150 + 30 | 170 + 30 |
| | | 40 - 20 k | 70 + 7 | 75 + 7 | 80 + 7 | 85 + 7 | 40 + 7 | 45 + 7 |
| | | 20 k - 50 k | 120 + 20 | 130 + 20 | 140 + 20 | 140 + 20 | 100 + 20 | 110 + 20 |
| | | 50 k - 100 k | 230 + 80 | 250 + 80 | 270 + 80 | 280 + 80 | 200 + 80 | 220 + 80 |
| | | 100 k - 300 k | 400 + 150 | 440 + 150 | 470 + 150 | 480 + 150 | 400 + 150 | 440 + 150 |
| | | 300 k - 500 k | 1000 + 400 | 1100 + 400 | 1200 + 400 | 1200 + 400 | 1000 + 400 | 1100 + 400 |
| | | 500 k - 1 M | 2000 + 1000 | 2200 + 1000 | 2300 + 1000 | 2400 + 1000 | 2000 + 1000 | 2200 + 1000 |
| 22 V | 10 μV | 10 - 20 | 500 + 1000 | 550 + 1000 | 600 + 1000 | 600 + 1000 | 500 + 1000 | 550 + 1000 |
| | | 20 - 40 | 150 + 300 | 170 + 300 | 170 + 300 | 180 + 300 | 150 + 300 | 170 + 300 |
| | | 40 - 20 k | 70 + 70 | 75 + 70 | 80 + 70 | 85 + 70 | 40 + 70 | 45 + 70 |
| | | 20 k - 50 k | 120 + 200 | 130 + 200 | 140 + 200 | 140 + 200 | 100 + 200 | 110 + 200 |
| | | 50 k - 100 k | 230 + 400 | 250 + 400 | 270 + 400 | 280 + 400 | 200 + 400 | 220 + 400 |
| | | 100 k - 300 k | 500 + 1700 | 550 + 1700 | 550 + 1700 | 600 + 1700 | 500 + 1700 | 550 + 1700 |
| | | 300 k - 500 k | 1200 + 5000 | 1300 + 5000 | 1300 + 5000 | 1400 + 5000 | 1200 + 5000 | 1300 + 5000 |
| | | 500 k - 1 M | 2600 + 9000 | 2800 + 9000 | 2900 + 9000 | 3000 + 9000 | 2600 + 9000 | 2800 + 9000 |
| ± (ppm output + mV) | | | | | | | | |
| 220 V ^[2] | 100 μV | 10 - 20 | 500 + 10 | 550 + 10 | 600 + 10 | 600 + 10 | 500 + 10 | 550 + 10 |
| | | 20 - 40 | 150 + 3 | 170 + 3 | 170 + 3 | 180 + 3 | 150 + 3 | 170 + 3 |
| | | 40 - 20 k | 75 + 1 | 80 + 1 | 85 + 1 | 90 + 1 | 45 + 1 | 50 + 1 |
| | | 20 k - 50 k | 200 + 4 | 220 + 4 | 240 + 4 | 250 + 4 | 100 + 1 | 110 + 1 |
| | | 50 k - 100 k | 500 + 10 | 550 + 10 | 600 + 10 | 600 + 10 | 300 + 10 | 330 + 10 |
| | | 100 k - 300 k | 1500 + 110 | 1500 + 110 | 1600 + 110 | 1600 + 110 | 1500 + 110 | 1500 + 100 |
| 300 k - 500 k | 5000 + 110 | 5200 + 110 | 5300 + 110 | 5400 + 110 | 5000 + 110 | 5200 + 110 | | |
| 500 k - 1 M | 12,000 + 220 | 12,500 + 220 | 12,500 + 220 | 13,000 + 220 | 12,000 + 220 | 12,000 + 220 | | |
| 1100 V ^[1] | 1 mV | 15 - 50 | 400 + 20 | 420 + 20 | 440 + 20 | 460 + 20 | 400 + 20 | 420 + 20 |
| | | 50 - 1 k | 75 + 4 | 80 + 4 | 85 + 4 | 90 + 4 | 50 + 4 | 55 + 4 |

| 5725A Amplifier: | | | | | | | | |
|---|------|--------------|----------|-----------|-----------|-----------|----------|-----------|
| 1100 V | 1 mV | 40 - 1 k | 75 + 4 | 80 + 4 | 85 + 4 | 90 + 4 | 50 + 4 | 55 + 4 |
| | | 1 k - 20 k | 105 + 6 | 125 + 6 | 135 + 6 | 165 + 6 | 85 + 6 | 105 + 6 |
| | | 20 k - 30 k | 230 + 11 | 360 + 11 | 440 + 11 | 600 + 11 | 160 + 11 | 320 + 11 |
| 750 V | | 30 k - 50 k | 230 + 11 | 360 + 11 | 440 + 11 | 600 + 11 | 160 + 11 | 320 + 11 |
| | | 50 k - 100 k | 600 + 45 | 1300 + 45 | 1600 + 45 | 2300 + 45 | 380 + 45 | 1200 + 45 |
| Notes: | | | | | | | | |
| 1. Maximum output 250 V from 15-50 Hz. | | | | | | | | |
| 2. See Volt-Hertz capability in Figure A. | | | | | | | | |

5700A Series II AC Voltage Specifications: 95 % Confidence Level

| Range | Resolution | Frequency (Hz) | Absolute Uncertainty ± 5 °C from calibration temperature | | | | Relative Uncertainty ± 1 °C | |
|-----------------------|------------|------------------------------|---|----------------------------|----------------------------|----------------------------|--------------------------------|----------------------------|
| | | | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| | | | ± (ppm output + μV) | | | | | |
| 2.2 mV | 1 nV | 10 - 20 | 400 + 4.5 | 500 + 4.5 | 530 + 4.5 | 550 + 4.5 | 400 + 4.5 | 500 + 4.5 |
| | | 20 - 40 | 170 + 4.5 | 190 + 4.5 | 200 + 4.5 | 210 + 4.5 | 170 + 4.5 | 190 + 4.5 |
| | | 40 - 20 k | 85 + 4.5 | 95 + 4.5 | 100 + 4.5 | 105 + 4.5 | 55 + 4.5 | 60 + 4.5 |
| | | 20 k - 50 k | 300 + 4.5 | 330 + 4.5 | 350 + 4.5 | 370 + 4.5 | 90 + 4.5 | 100 + 4.5 |
| | | 50 k - 100 k | 700 + 7 | 750 + 7 | 800 + 7 | 850 + 7 | 210 + 7 | 230 + 7 |
| | | 100 k - 300 k | 900 + 13 | 1000 + 13 | 1050 + 13 | 1100 + 13 | 380 + 13 | 420 + 13 |
| | | 300 k - 500 k 500 k - 1 M | 1300 + 25 2800 + 25 | 1500 + 25 3100 + 25 | 1600 + 25 3300 + 25 | 1700 + 25 3400 + 25 | 900 + 25 2900 + 25 | 1000 + 25 3200 + 25 |
| 22 mV | 10 nV | 10 - 20 | 400 + 5 | 500 + 5 | 530 + 5 | 550 + 5 | 400 + 5 | 500 + 5 |
| | | 20 - 40 | 170 + 5 | 190 + 5 | 200 + 5 | 210 + 5 | 170 + 5 | 190 + 5 |
| | | 40 - 20 k | 85 + 5 | 95 + 5 | 100 + 5 | 105 + 5 | 55 + 5 | 60 + 5 |
| | | 20 k - 50 k | 300 + 5 | 330 + 5 | 350 + 5 | 370 + 5 | 90 + 5 | 100 + 5 |
| | | 50 k - 100 k | 700 + 7 | 750 + 7 | 800 + 7 | 850 + 7 | 210 + 7 | 230 + 7 |
| | | 100 k - 300 k | 900 + 12 | 1000 + 12 | 1050 + 12 | 1100 + 12 | 380 + 12 | 420 + 12 |
| | | 300 k - 500 k 500 k - 1 M | 1300 + 25 2800 + 25 | 1500 + 25 3100 + 25 | 1600 + 25 3300 + 25 | 1700 + 25 3400 + 25 | 900 + 25 2900 + 25 | 1000 + 25 3200 + 25 |
| 220 mV | 100 nV | 10 - 20 | 400 + 13 | 500 + 13 | 530 + 13 | 550 + 13 | 400 + 13 | 500 + 13 |
| | | 20 - 40 | 170 + 8 | 190 + 8 | 200 + 8 | 210 + 8 | 170 + 8 | 190 + 8 |
| | | 40 - 20 k | 85 + 8 | 95 + 8 | 100 + 8 | 105 + 8 | 55 + 8 | 60 + 8 |
| | | 20 k - 50 k | 250 + 8 | 280 + 8 | 300 + 8 | 320 + 8 | 90 + 8 | 100 + 8 |
| | | 50 k - 100 k | 700 + 25 | 750 + 25 | 800 + 25 | 850 + 25 | 210 + 25 | 230 + 25 |
| | | 100 k - 300 k | 900 + 25 | 1000 + 25 | 1050 + 25 | 1100 + 25 | 380 + 25 | 420 + 25 |
| | | 300 k - 500 k 500 k - 1 M | 1300 + 35 2800 + 80 | 1500 + 35 3100 + 80 | 1600 + 35 3300 + 80 | 1700 + 35 3400 + 80 | 900 + 35 2900 + 80 | 1000 + 35 3200 + 80 |
| 2.2 V | 1 μV | 10 - 20 | 400 + 80 | 450 + 80 | 480 + 80 | 500 + 80 | 400 + 80 | 450 + 80 |
| | | 20 - 40 | 130 + 25 | 140 + 25 | 150 + 25 | 160 + 25 | 130 + 25 | 140 + 25 |
| | | 40 - 20 k | 60 + 6 | 65 + 6 | 70 + 6 | 75 + 6 | 35 + 6 | 40 + 6 |
| | | 20 k - 50 k | 105 + 16 | 110 + 16 | 115 + 16 | 120 + 16 | 85 + 16 | 95 + 16 |
| | | 50 k - 100 k | 190 + 70 | 210 + 70 | 230 + 70 | 250 + 70 | 170 + 70 | 190 + 70 |
| | | 100 k - 300 k | 350 + 130 | 390 + 130 | 420 + 130 | 430 + 130 | 340 + 130 | 380 + 130 |
| | | 300 k - 500 k 500 k - 1 M | 850 + 350 1700 + 850 | 950 + 350 1900 + 850 | 1000 + 350 2100 + 850 | 1050 + 350 2200 + 850 | 850 + 350 1700 + 850 | 950 + 350 1900 + 850 |
| 22 V | 10 μV | 10 - 20 | 400 + 800 | 450 + 800 | 480 + 800 | 500 + 800 | 400 + 800 | 450 + 800 |
| | | 20 - 40 | 130 + 250 | 140 + 250 | 150 + 250 | 160 + 250 | 130 + 250 | 140 + 250 |
| | | 40 - 20 k | 60 + 60 | 65 + 60 | 70 + 60 | 75 + 60 | 35 + 60 | 40 + 60 |
| | | 20 k - 50 k | 105 + 160 | 110 + 160 | 115 + 160 | 120 + 160 | 85 + 160 | 95 + 160 |
| | | 50 k - 100 k | 190 + 350 | 210 + 350 | 230 + 350 | 250 + 350 | 170 + 350 | 190 + 350 |
| | | 100 k - 300 k | 400 + 1500 | 450 + 1500 | 470 + 1500 | 500 + 1500 | 400 + 1500 | 450 + 1500 |
| | | 300 k - 500 k 500 k - 1 M | 1050 + 4300 2300 + 8500 | 1150 + 4300 2500 + 8500 | 1200 + 4300 2600 + 8500 | 1250 + 4300 2700 + 8500 | 1000 + 4300 2200 + 8500 | 1100 + 4300 2400 + 8500 |
| ± (ppm output + mV) | | | | | | | | |
| 220 V ^[2] | 100 μV | 10 - 20 | 400 + 8 | 450 + 8 | 480 + 8 | 500 + 8 | 400 + 8 | 450 + 8 |
| | | 20 - 40 | 130 + 2.5 | 140 + 2.5 | 150 + 2.5 | 160 + 2.5 | 130 + 2.5 | 140 + 2.5 |
| | | 40 - 20 k | 65 + 0.8 | 70 + 0.8 | 75 + 0.8 | 80 + 0.8 | 40 + 0.8 | 45 + 0.8 |
| | | 20 k - 50 k | 170 + 3.5 | 190 + 3.5 | 210 + 3.5 | 220 + 3.5 | 85 + 3.5 | 95 + 3.5 |
| | | 50 k - 100 k | 400 + 8 | 450 + 8 | 480 + 8 | 500 + 8 | 270 + 8 | 300 + 8 |
| | | 100 k - 300 k | 1300 + 90 | 1400 + 90 | 1450 + 90 | 1500 + 90 | 1200 + 90 | 1300 + 90 |
| | | 300 k - 500 k 500 k - 1 M | 4300 + 90 10,500 + 190 | 4500 + 90 11,000 + 190 | 4600 + 90 11,300 + 190 | 4700 + 90 11,500 + 190 | 4200 + 90 10,500 + 190 | 4500 + 90 11,000 + 190 |
| 1100 V ^[1] | 1 mV | 15 - 50 | 340 + 16 | 360 + 16 | 380 + 16 | 400 + 16 | 340 + 16 | 360 + 16 |
| | | 50 - 1 k | 65 + 3.5 | 70 + 3.5 | 75 + 3.5 | 80 + 3.5 | 45 + 3.5 | 50 + 3.5 |

5725A Amplifier:

| | | | | | | | | |
|--------|------|--------------|----------|-----------|-----------|-----------|----------|-----------|
| 1100 V | 1 mV | 40 - 1 k | 75 + 4 | 80 + 4 | 85 + 4 | 90 + 4 | 50 + 4 | 55 + 4 |
| | | 1 k - 20 k | 105 + 6 | 125 + 6 | 135 + 6 | 165 + 6 | 85 + 6 | 105 + 6 |
| | | 20 k - 30 k | 230 + 11 | 360 + 11 | 440 + 11 | 600 + 11 | 160 + 11 | 320 + 11 |
| 750 V | | 30 k - 50 k | 230 + 11 | 360 + 11 | 440 + 11 | 600 + 11 | 160 + 11 | 320 + 11 |
| | | 50 k - 100 k | 600 + 45 | 1300 + 45 | 1600 + 45 | 2300 + 45 | 380 + 45 | 1200 + 45 |

Notes:

1. Maximum output 250 V from 15-50 Hz.
2. See Volt-Hertz capability in Figure A.

AC Voltage Secondary Performance Specifications and Operating Characteristics

| Range | Frequency (Hz) | Stability ± 1 °C ⁽¹⁾ 24 Hours | Temperature Coefficient | | Output Impedance (Ω) | Maximum Distortion Bandwidth 10 Hz-10 MHz |
|--------|----------------|--|-------------------------|--------------------------------|---------------------------------------|--|
| | | | 10 - 40 °C | 0 - 10 °C and 40 - 50 °C | | |
| | | | ± μV / °C | | | |
| 2.2 mV | 10 - 20 | 5 | 0.05 | 0.05 | 50 | 0.05 + 10 |
| | 20 - 40 | 5 | 0.05 | 0.05 | | 0.035 + 10 |
| | 40 - 20 k | 2 | 0.05 | 0.05 | | 0.035 + 10 |
| | 20 k - 50 k | 2 | 0.1 | 0.1 | | 0.035 + 10 |
| | 50 k - 100 k | 3 | 0.2 | 0.2 | | 0.035 + 30 |
| | 100 k - 300 k | 3 | 0.3 | 0.3 | | 0.3 + 30 |
| | 300 k - 500 k | 5 | 0.4 | 0.4 | | 0.3 + 30 |
| | 500 k - 1 M | 5 | 0.5 | 0.5 | | 2 + 50 |
| 22 mV | 10 - 20 | 5 | 0.2 | 0.3 | 50 | 0.05 + 11 |
| | 20 - 40 | 5 | 0.2 | 0.3 | | 0.035 + 11 |
| | 40 - 20 k | 2 | 0.2 | 0.3 | | 0.035 + 11 |
| | 20 k - 50 k | 2 | 0.4 | 0.5 | | 0.035 + 11 |
| | 50 k - 100 k | 3 | 0.5 | 0.5 | | 0.035 + 30 |
| | 100 k - 300 k | 5 | 0.6 | 0.6 | | 0.3 + 30 |
| | 300 k - 500 k | 10 | 1 | 1 | | 0.3 + 30 |
| | 500 k - 1 M | 15 | 1 | 1 | | 2 + 30 |
| | | ± (ppm output + μV) | ± (ppm output μV) / °C | | | |
| 220 mV | 10 - 20 | 150 + 20 | 2 + 1 | 2 + 1 | 50 | 0.05 + 16 |
| | 20 - 40 | 80 + 15 | 2 + 1 | 2 + 1 | | 0.035 + 16 |
| | 40 - 20 k | 12 + 2 | 2 + 1 | 2 + 1 | | 0.035 + 16 |
| | 20 k - 50 k | 10 + 2 | 15 + 2 | 15 + 2 | | 0.035 + 16 |
| | 50 k - 100 k | 10 + 2 | 15 + 4 | 15 + 4 | | 0.035 + 30 |
| | 100 k - 300 k | 20 + 4 | 80 + 5 | 80 + 5 | | 0.3 + 30 |
| | 300 k - 500 k | 100 + 10 | 80 + 5 | 80 + 5 | | 0.3 + 30 |
| | 500 k - 1 M | 200 + 20 | 80 + 5 | 80 + 5 | | 1 + 30 |
| | | | | | Load Regulation ±(ppm output + μV) | |
| 2.2 V | 10 - 20 | 150 + 20 | 50 + 10 | 50 + 10 | 10 + 2 | 0.05 + 80 |
| | 20 - 40 | 80 + 15 | 15 + 5 | 15 + 5 | 10 + 2 | 0.035 + 80 |
| | 40 - 20 k | 12 + 4 | 2 + 1 | 5 + 2 | 10 + 4 | 0.035 + 80 |
| | 20 k - 50 k | 15 + 5 | 10 + 2 | 15 + 4 | 30 + 10 | 0.035 + 80 |
| | 50 k - 100 k | 15 + 5 | 10 + 4 | 20 + 4 | 120 + 16 | 0.035 + 110 |
| | 100 k - 300 k | 30 + 10 | 80 + 15 | 80 + 15 | 300 ppm | 0.3 + 110 |
| | 300 k - 500 k | 70 + 20 | 80 + 40 | 80 + 40 | 600 ppm | 0.5 + 110 |
| | 500 k - 1 M | 150 + 50 | 80 + 100 | 80 + 100 | 1200 ppm | 1 + 110 |
| 22 V | 10 - 20 | 150 + 20 | 50 + 100 | 50 + 100 | 10 + 20 | 0.05 + 700 |
| | 20 - 40 | 80 + 15 | 15 + 30 | 15 + 40 | 10 + 20 | 0.035 + 700 |
| | 40 - 20 k | 12 + 8 | 2 + 10 | 4 + 15 | 10 + 30 | 0.035 + 700 |
| | 20 k - 50 k | 15 + 10 | 10 + 20 | 20 + 20 | 30 + 50 | 0.035 + 700 |
| | 50 k - 100 k | 15 + 10 | 10 + 40 | 20 + 40 | 80 + 80 | 0.05 + 800 |
| | 100 k - 300 k | 30 + 15 | 80 + 150 | 80 + 150 | 100 + 700 | 0.3 + 800 |
| | 300 k - 500 k | 70 + 100 | 80 + 300 | 80 + 300 | 200 + 1100 | 0.3 + 800 |
| | 500 k - 1 M | 150 + 100 | 80 + 500 | 80 + 500 | 600 + 3000 | 2 + 800 |
| 220 V | 10 - 20 | 150 + 200 | 50 + 1000 | 50 + 1000 | 10 + 200 | 0.05 + 10,000 |
| | 20 - 40 | 80 + 150 | 15 + 300 | 15 + 300 | 10 + 200 | 0.05 + 10,000 |
| | 40 - 20 k | 12 + 80 | 2 + 80 | 4 + 80 | 10 + 300 | 0.05 + 10,000 |
| | 20 k - 50 k | 15 + 100 | 10 + 100 | 20 + 100 | 30 + 600 | 0.05 + 10,000 |
| | 50 k - 100 k | 15 + 100 | 10 + 500 | 20 + 500 | 80 + 3,000 | 0.2 + 50,000 |
| | 100 k - 300 k | 30 + 400 | 80 + 600 | 80 + 600 | 250 + 25,000 | 1.5 + 50,000 |
| | 300 k - 500 k | 100 + 10,000 | 80 + 800 | 80 + 800 | 500 + 50,000 | 1.5 + 50,000 |
| | 500 k - 1 M | 200 + 20,000 | 80 + 1000 | 80 + 1000 | 1000 + 110,000 | 3.5 + 100,000 |
| | | ±(ppm output + mV) | ±(ppm output) / °C | | ±(ppm output + mV) | ±(% output) |
| 1100 V | 15 - 50 | 150 + 0.5 | 50 | 50 | 10 + 2 | 0.15 |
| | 50 - 1 k | 20 + 0.5 | 2 | 5 | 10 + 1 | 0.07 |

| 5725A Amplifier: | | | | | | | |
|--|----------------|--|----------------------------------|-----------------------------|--------------------------------|---|---------|
| Range | Frequency (Hz) | Stability ± 1 °C ^[1] 24 Hours | Temperature Coefficient Adder | | Load Regulation ^[2] | Distortion Bandwidth 10 Hz -10 MHz ±(% output) | |
| | | | 10 - 40 °C | 0 - 10 °C and 40 - 50 °C | | 150 pF | 1000 pF |
| | | | ±(ppm output) / °C | | | ±(ppm output + mV) | |
| 1100 V | 40 - 1 k | 10 + .5 | 5 | 5 | 10 + 1 | 0.10 | 0.10 |
| | 1 k - 20 k | 15 + 2 | 5 | 5 | 90 + 6 | 0.10 | 0.15 |
| | 20 k - 50 k | 40 + 2 | 10 | 10 | 275 + 11 | 0.30 | 0.30 |
| | 50 k - 100 k | 130 + 2 | 30 | 30 | 500 + 30 | 0.40 | 0.40 |
| Notes: | | | | | | | |
| 1. Stability specifications are included in Absolute Uncertainty values for the primary specifications. | | | | | | | |
| 2. The 5725A will drive up to 1000 pF of load capacitance. Uncertainty specifications include loads to 300 pF and 150 pF as shown under "Load Limits." For capacitances up to the maximum of 1000 pF, add "Load Regulation." | | | | | | | |

| Voltage Range | Maximum Current Limits | Load Limits | |
|--|---|----------------------|------------------------|
| 2.2 V ^[2] | 50 mA, 0 °C-40 °C 20 mA, 40 °C-50 °C | >50 Ω, 1000 pF | |
| 22 V | | | |
| 220 V | | | |
| 1100 V | 6 mA | 600 pF | |
| 5725A Amplifier: | | | |
| 1100 V | 40 Hz-5 kHz | 50 mA | 1000 pF ^[1] |
| | 5 kHz-30 kHz | 70 mA | 300 pF |
| | 30 kHz-100 kHz | 70 mA ^[3] | 150 pF |
| Notes: | | | |
| 1. The 5725A will drive up to 1000 pF of load capacitance. Uncertainty specifications include loads to 300 pF and 150 pF as shown under "Load Limits." For capacitances up to the maximum of 1000 pF, add "Load Regulation." | | | |
| 2. 2.2 V Range, 100 kHz-1.2 MHz only: uncertainty specifications cover loads to 10 mA or 1000 pF. For higher loads, load regulation is added. | | | |
| 3. Applies from 0 °C to 40 °C. | | | |

Output Display FormatsVoltage or dBm, dBm reference 600 Ω.

Minimum Output10 % on each range

External SenseApplicable for 2.2 V, 22 V, 220 V, and 1100 V ranges; 5700A/5720A <100 kHz, 5725A <30 kHz. Specifications are the same as internal sense.

Settling Time to Full Accuracy

| Frequency (Hz) | Settling Time (seconds) |
|----------------|-------------------------|
| <20 | 7 |
| 120-120 k | 5 |
| >120 k | 2 |

Notes:
 Plus 1 second for amplitude or frequency range change
 Plus 2 seconds for 5700A/5720A 1100 V range
 Plus 4 seconds for 5725A 1100 V range

Overshoot<10 %
Common Mode Rejection 140 dB, DC to 400 Hz

Frequency

Ranges (Hz) 10.000 - 119.99
 0.1200 k - 1.1999 k
 1.200 k - 11.999 k
 12.00 k - 119.99 k
 120.0 k - 1.1999 M

Uncertainty ±0.01 %
 Resolution 11.999 counts

Phase Lock (Selectable Rear Panel BNC Input)

Phase Uncertainty (except 1100 V range) >30 Hz: ±1 ° + 0.05 °/kHz, <30 Hz: ±3 °
 Input Voltage 1 V to 10 V rms sine wave (do not exceed 1 V for mV ranges)
 Frequency Range 10 Hz to 1.1999 MHz
 Lock Range ±2 % of frequency
 Lock-In Time Larger of 10/frequency or 10 msec

Phase Reference (Selectable Rear Panel BNC Output)

Range ±180 °
 Phase Uncertainty (except 1100 V range) ±1 ° at quadrature points (0 °, ±90 °, ±180 °) elsewhere ±2 °
 Stability ±0.1 °
 Resolution 1 °
 Output Level 2.5 V rms ±0.2 V
 Frequency Range 50 kHz to 1 kHz, usable 10 Hz to 1.1999 MHz

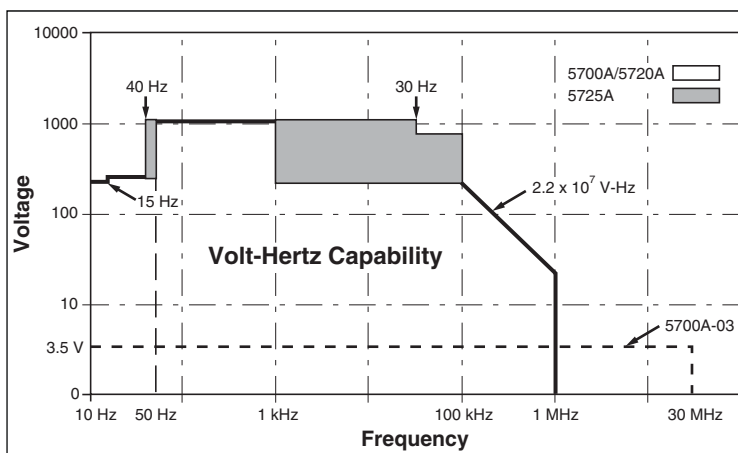


Figure A.

Resistance Specifications

5720A Series II Resistance Specifications

| Nominal Value (Ω) | Absolute Uncertainty of Characterized Value ± 5 °C from calibration temperature ⁽¹⁾ | | | | Relative Uncertainty ± 1 °C | |
|--|---|---------|----------|--------|--------------------------------|---------|
| | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| | ±ppm | | | | | |
| 99 % Confidence Level | | | | | | |
| 0 | 50 μΩ | 50 μΩ | 50 μΩ | 50 μΩ | 50 μΩ | 50 μΩ |
| 1 | 85 | 95 | 100 | 110 | 32 | 40 |
| 1.9 | 85 | 95 | 100 | 110 | 25 | 33 |
| 10 | 23 | 25 | 26 | 27 | 5 | 8 |
| 19 | 23 | 25 | 26 | 27 | 4 | 7 |
| 100 | 10 | 11 | 11.5 | 12 | 2 | 4 |
| 190 | 10 | 11 | 11.5 | 12 | 2 | 4 |
| 1 k | 8 | 9 | 9.5 | 10 | 2 | 3 |
| 1.9 k | 8 | 9 | 9.5 | 10 | 2 | 3 |
| 10 k | 8 | 9 | 9.5 | 10 | 2 | 3 |
| 19 k | 9 | 9 | 9.5 | 10 | 2 | 3 |
| 100 k | 9 | 11 | 12 | 13 | 2 | 3 |
| 190 k | 9 | 11 | 12 | 13 | 2 | 3 |
| 1 M | 16 | 18 | 20 | 23 | 2.5 | 5 |
| 1.9 M | 17 | 19 | 21 | 24 | 3 | 6 |
| 10 M | 33 | 37 | 40 | 46 | 10 | 14 |
| 19 M | 43 | 47 | 50 | 55 | 20 | 24 |
| 100 M | 100 | 110 | 115 | 120 | 50 | 60 |
| 95 % Confidence Level | | | | | | |
| 0 | 40 μΩ | 40 μΩ | 40 μΩ | 40 μΩ | 40 μΩ | 40 μΩ |
| 1 | 70 | 80 | 85 | 95 | 27 | 35 |
| 1.9 | 70 | 80 | 85 | 95 | 20 | 26 |
| 10 | 20 | 21 | 22 | 23 | 4 | 7 |
| 19 | 20 | 21 | 22 | 23 | 3.5 | 6 |
| 100 | 8 | 9 | 9.5 | 10 | 1.6 | 3.5 |
| 190 | 8 | 9 | 9.5 | 10 | 1.6 | 3.5 |
| 1 k | 6.5 | 7.5 | 8 | 8.5 | 1.6 | 2.5 |
| 1.9 k | 6.5 | 7.5 | 8 | 8.5 | 1.6 | 2.5 |
| 10 k | 6.5 | 7.5 | 8 | 8.5 | 1.6 | 2.5 |
| 19 k | 7.5 | 7.5 | 8 | 8.5 | 1.6 | 2.5 |
| 100 k | 7.5 | 9 | 10 | 11 | 1.6 | 2.5 |
| 190 k | 7.5 | 9 | 10 | 11 | 1.6 | 2.5 |
| 1 M | 13 | 15 | 17 | 20 | 2 | 4 |
| 1.9 M | 14 | 16 | 18 | 21 | 2.5 | 4 |
| 10 M | 27 | 31 | 34 | 40 | 8 | 12 |
| 19 M | 35 | 39 | 42 | 47 | 16 | 20 |
| 100 M | 85 | 95 | 100 | 100 | 40 | 50 |
| Note: | | | | | | |
| 1. Specifications apply to displayed value. 4-wire connections, except 100 MΩ. | | | | | | |

5700A Series II Resistance Specifications

| Nominal Value (Ω) | Absolute Uncertainty of Characterized Value $\pm 5\text{ }^\circ\text{C}$ from calibration temperature ^[1] | | | | Relative Uncertainty $\pm 1\text{ }^\circ\text{C}$ | |
|---|--|----------------|----------------|----------------|---|----------------|
| | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| | $\pm\text{ppm}$ | | | | | |
| 99 % Confidence Level | | | | | | |
| 0 | 50 $\mu\Omega$ | 50 $\mu\Omega$ | 50 $\mu\Omega$ | 50 $\mu\Omega$ | 50 $\mu\Omega$ | 50 $\mu\Omega$ |
| 1 | 85 | 95 | 100 | 110 | 32 | 40 |
| 1.9 | 85 | 95 | 100 | 110 | 25 | 33 |
| 10 | 26 | 28 | 30 | 33 | 5 | 8 |
| 19 | 24 | 26 | 28 | 31 | 4 | 7 |
| 100 | 15 | 17 | 18 | 20 | 2 | 4 |
| 190 | 15 | 17 | 18 | 20 | 2 | 4 |
| 1 k | 11 | 12 | 13 | 15 | 2 | 3.5 |
| 1.9 k | 11 | 12 | 13 | 15 | 2 | 3.5 |
| 10 k | 9 | 11 | 12 | 14 | 2 | 3.5 |
| 19 k | 9 | 11 | 12 | 14 | 2 | 3.5 |
| 100 k | 11 | 13 | 14 | 16 | 2 | 3.5 |
| 190 k | 11 | 13 | 14 | 16 | 2 | 3.5 |
| 1 M | 16 | 18 | 20 | 23 | 2.5 | 5 |
| 1.9 M | 17 | 19 | 21 | 24 | 3.5 | 6 |
| 10 M | 33 | 37 | 40 | 46 | 10 | 14 |
| 19 M | 43 | 47 | 50 | 55 | 20 | 24 |
| 100 M | 110 | 120 | 125 | 130 | 50 | 60 |
| 95 % Confidence Level | | | | | | |
| 0 | 50 $\mu\Omega$ | 50 $\mu\Omega$ | 50 $\mu\Omega$ | 50 $\mu\Omega$ | 50 $\mu\Omega$ | 50 $\mu\Omega$ |
| 1 | 70 | 80 | 85 | 95 | 32 | 40 |
| 1.9 | 70 | 80 | 85 | 95 | 25 | 33 |
| 10 | 21 | 23 | 27 | 28 | 5 | 8 |
| 19 | 20 | 22 | 24 | 27 | 4 | 7 |
| 100 | 13 | 14 | 15 | 17 | 2 | 4 |
| 190 | 13 | 14 | 15 | 17 | 2 | 4 |
| 1 k | 9 | 10 | 11 | 13 | 2 | 3.5 |
| 1.9 k | 9 | 10 | 11 | 13 | 2 | 3.5 |
| 10 k | 7.5 | 9.5 | 10.5 | 12 | 2 | 3.5 |
| 19 k | 7.5 | 9.5 | 10.5 | 12 | 2 | 3.5 |
| 100 k | 9 | 11 | 12 | 14 | 2 | 3.5 |
| 190 k | 9 | 11 | 12 | 14 | 2 | 3.5 |
| 1 M | 13 | 15 | 17 | 20 | 2.5 | 5 |
| 1.9 M | 14 | 16 | 18 | 21 | 3 | 6 |
| 10 M | 27 | 31 | 34 | 40 | 10 | 14 |
| 19 M | 35 | 39 | 42 | 47 | 20 | 24 |
| 100 M | 90 | 100 | 105 | 110 | 50 | 60 |
| Note: | | | | | | |
| 1. Specifications apply to displayed value. 4-wire connections, except 100 M Ω . | | | | | | |

Resistance Secondary Performance Specifications and Operating Characteristics

| Nominal Value (Ω) | Stability ± 1 °C ⁽¹⁾ 24 Hours | Temperature Coefficient Adder ⁽²⁾ | | Full Spec Load Range ⁽³⁾ $I_L - I_V$ (mA) | Maximum Peak Current I_{MAX} (mA) | Maximum Difference of Characterized to Nominal Value | Two-Wire Adder Active Compensation ⁽⁴⁾ | |
|-------------------|---|--|--------------------------|---|-------------------------------------|--|---|--------------------------|
| | | 10 - 40 °C | 0 - 10 °C and 40 - 50 °C | | | | Lead Resistance | |
| | | | | | | | 0.1 Ω | 1 Ω |
| | | | | | | ±mΩ | | |
| | | ±ppm | ±ppm/°C | | | ±ppm | | |
| 0 | — | — | — | 8 - 500 | 500 | — | $2 + \frac{4\mu V}{I_m}$ | $4 + \frac{4\mu V}{I_m}$ |
| 1 | 32 | 4 | 5 | 8 - 100 | 700 | 500 | $2 + \frac{4\mu V}{I_m}$ | $4 + \frac{4\mu V}{I_m}$ |
| 1.9 | 25 | 6 | 7 | 8 - 100 | 500 | 500 | $2 + \frac{4\mu V}{I_m}$ | $4 + \frac{4\mu V}{I_m}$ |
| 10 | 5 | 2 | 3 | 8 - 11 | 220 | 300 | $2 + \frac{4\mu V}{I_m}$ | $4 + \frac{4\mu V}{I_m}$ |
| 19 | 4 | 2 | 3 | 8 - 11 | 160 | 300 | $2 + \frac{4\mu V}{I_m}$ | $4 + \frac{4\mu V}{I_m}$ |
| 100 | 2 | 2 | 3 | 8 - 11 | 70 | 150 | $2 + \frac{4\mu V}{I_m}$ | $4 + \frac{4\mu V}{I_m}$ |
| 190 | 2 | 2 | 3 | 8 - 11 | 50 | 150 | $2 + \frac{4\mu V}{I_m}$ | $4 + \frac{4\mu V}{I_m}$ |
| 1 k | 2 | 2 | 3 | 1 - 2 | 22 | 150 | 10 | 15 |
| 1.9 k | 2 | 2 | 3 | 1 - 1.5 | 16 | 150 | 10 | 15 |
| 10 k | 2 | 2 | 3 | 100 - 500 μA | 7 | 150 | 50 | 60 |
| 19 k | 2 | 2 | 3 | 50 - 250 μA | 5 | 150 | 100 | 120 |
| 100 k | 2 | 2 | 3 | 10 - 100 μA | 1 | 150 | I_m = Current produced by Ohmmeter (A) | |
| 190 k | 2 | 2 | 3 | 5 - 50 μA | 500 μA | 150 | | |
| 1 M | 2.5 | 2.5 | 6 | 5 - 20 μA | 100 μA | 200 | | |
| 1.9 M | 3.5 | 3 | 10 | 2.5 - 10 μA | 50 μA | 200 | | |
| 10 M | 10 | 5 | 20 | 0.5 - 2 μA | 10 μA | 300 | | |
| 19 M | 20 | 8 | 40 | 0.25 - 1 μA | 5 μA | 300 | | |
| 100 M | 50 | 12 | 100 | 50 - 200 nA | 1 μA | 500 | | |

Notes:

- Stability specifications are included in the Absolute Uncertainty values in the primary specification tables.
- Temperature coefficient is an adder to uncertainty specifications that does not apply unless operated more than 5 °C from calibration temperature, or calibrated outside the range 19 °C to 24 °C. Two examples:
 - Calibrate at 20 °C: Temperature coefficient adder is not required unless operated below 15 °C or above 25 °C.
 - Calibrate at 26 °C: Add 2 °C temperature coefficient adder. Additional temperature coefficient adder is not required unless operated below 21 °C or above 31 °C.
- Refer to current derating factors table for loads outside of this range.
- Active two-wire compensation may be selected for values less than 100 kΩ, with either the front panel or the meter input terminals as reference plane. Active compensation is limited to 11 mA load, and to 2 V burden. Two-wire compensation can be used only with Ω-meters that source continuous (not pulsed) dc current.

Current Derating Factors

| Nominal Value (Ω) | Value of Derating Factor K for Over or Under Current | | |
|-------------------------------|--|---------------------------------------|---|
| | Two-Wire Comp $I < I_L$ ^[1] | Four-Wire $I < I_L$ ^[1] | Four-Wire $I_U < I < I_{MAX}$ ^[2] |
| SHORT | 4.4 | 0.3 | — |
| 1 | 4.4 | 300 | 4×10^{-5} |
| 1.9 | 4.4 | 160 | 1.5×10^{-4} |
| 10 | 4.4 | 30 | 1.6×10^{-3} |
| 19 | 4.4 | 16 | 3×10^{-3} |
| 100 | 4.4 | 3.5 | 1×10^{-2} |
| 190 | 4.4 | 2.5 | 1.9×10^{-2} |
| 1 k | 4.4 | 0.4 | 0.1 |
| 1.9 k | 4.4 | 0.4 | 0.19 |
| 10 k | 5000 | 50 | 2.0 |
| 19 k | 5000 | 50 | 3.8 |
| 100 k | — | 7.5 | 2×10^{-5} |
| 190 k | — | 4.0 | 3.8×10^{-5} |
| 1 M | — | 1.0 | 1.5×10^{-4} |
| 1.9 M | — | 0.53 | 2.9×10^{-4} |
| 10 M | — | 0.2 | 1×10^{-3} |
| 19 M | — | 0.53 | 1.9×10^{-3} |
| 100 M | — | 0.1 | — |

Notes:

- For $I < I_L$, errors occur due to thermally generated voltages within the 5720A. Use the following equation to determine the error, and add this error to the corresponding uncertainty or stability specification.

$$\text{Error} = K(I_L - I) / (I_L \times I)$$

Where: Error is in m Ω for all two-wire comp values and four-wire short, and in ppm for the remaining four-wire values.

K is the constant from the above table;

I and I_L are expressed in mA for short to 1.9 k Ω ;

I and I_L are expressed in μ A for 10 k Ω to 100 M Ω

- For $I_U < I < I_{MAX}$ errors occur due to self-heating of the resistors in the calibrator. Use the following equation to determine the error in ppm and add this error to the corresponding uncertainty or stability specification.

$$\text{Error in ppm} = K(I^2 - I_U^2)$$

Where: K is the constant from the above table;

I and I_U are expressed in mA for short to 19 k Ω ;

I and I_U are expressed in μ A for 100 k Ω to 100 M Ω

DC Current Specifications

5720A Series II DC Current Specifications

| Range | Resolution | Absolute Uncertainty ± 5 °C from calibration temperature ^{[2],[3]} | | | | Relative Uncertainty ± 1 °C | |
|---|------------|--|-----------|-----------|-----------|-----------------------------|-----------|
| | | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| | nA | ± (ppm output + nA) | | | | | |
| 99 % Confidence Level | | | | | | | |
| 220 µA | 0.1 | 40 + 7 | 42 + 7 | 45 + 7 | 50 + 7 | 24 + 2 | 26 + 2 |
| 2.2 mA | 1 | 30 + 8 | 35 + 8 | 37 + 8 | 40 + 8 | 24 + 5 | 26 + 5 |
| 22 mA | 10 | 30 + 50 | 35 + 50 | 37 + 50 | 40 + 50 | 24 + 50 | 26 + 50 |
| | µA | ± (ppm output + µA) | | | | | |
| 220 mA ^[1] | 0.1 | 40 + 0.8 | 45 + 0.8 | 47 + 0.8 | 50 + 0.8 | 26 + 0.3 | 30 + 0.3 |
| 2.2 A ^[1] | 1 | 60 + 15 | 70 + 15 | 80 + 15 | 90 + 15 | 40 + 7 | 45 + 7 |
| 5725A Amplifier: | | | | | | | |
| 11 A | 10 | 330 + 470 | 340 + 480 | 350 + 480 | 360 + 480 | 100 + 130 | 110 + 130 |
| 95 % Confidence Level | | | | | | | |
| | nA | ± (ppm output + nA) | | | | | |
| 220 µA | 0.1 | 32 + 6 | 35 + 6 | 37 + 6 | 40 + 6 | 20 + 1.6 | 22 + 1.6 |
| 2.2 mA | 1 | 25 + 7 | 30 + 7 | 33 + 7 | 35 + 7 | 20 + 4 | 22 + 4 |
| 22 mA | 10 | 25 + 40 | 30 + 40 | 33 + 40 | 35 + 40 | 20 + 40 | 22 + 40 |
| | µA | ± (ppm output + µA) | | | | | |
| 220 mA ^[1] | 0.1 | 35 + 0.7 | 40 + 0.7 | 42 + 0.7 | 45 + 0.7 | 22 + 0.25 | 25 + 0.25 |
| 2.2 A ^[1] | 1 | 50 + 12 | 60 + 12 | 70 + 12 | 80 + 12 | 32 + 6 | 40 + 6 |
| 5725A Amplifier: | | | | | | | |
| 11 A | 10 | 330 + 470 | 340 + 480 | 350 + 480 | 360 + 480 | 100 + 130 | 110 + 130 |
| <p>Note:</p> <p>Maximum output from the calibrator's terminals is 2.2 A. Uncertainty specifications for 220 mA and 2.2 mA ranges are increased by a factor of 1.3 when supplied through 5725A terminals.</p> <p>Specifications are otherwise identical for all output locations.</p> <ol style="list-style-type: none"> Add to uncertainty specifications: <ul style="list-style-type: none"> ±200 x I² ppm for >100 mA on 220 mA range ±10 x I² ppm for >1 A on 2.2 A range For fields strengths >0.4 V/m but ≤3 V/m, in the band of 80 MHz to 1 GHz, add 1 % of range. For conducted immunity levels ≥1 V in the band of 150 kHz to 80 MHz on 2.2 mA range, add 0.01 % of range. | | | | | | | |

5700A Series II DC Current Specifications

| Range | Resolution | Absolute Uncertainty ± 5 °C from calibration temperature ^{[2][3]} | | | | Relative Uncertainty ± 1 °C | |
|---|------------|---|-----------|-----------|-----------|-----------------------------|-----------|
| | | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| | | nA ± (ppm output + nA) | | | | | |
| 99 % Confidence Level | | | | | | | |
| 220 µA | 0.1 | 45 + 10 | 50 + 10 | 55 + 10 | 60 + 10 | 24 + 2 | 26 + 2 |
| 2.2 mA | 1 | 45 + 10 | 50 + 10 | 55 + 10 | 60 + 10 | 24 + 5 | 26 + 5 |
| 22 mA | 10 | 45 + 100 | 50 + 100 | 55 + 100 | 60 + 100 | 24 + 50 | 26 + 50 |
| µA ± (ppm output + µA) | | | | | | | |
| 220 mA ^[1] | 0.1 | 55 + 1 | 60 + 1 | 65 + 1 | 70 + 1 | 26 + 0.3 | 30 + 0.3 |
| 2.2 A ^[1] | 1 | 75 + 30 | 80 + 30 | 90 + 30 | 95 + 30 | 40 + 7 | 45 + 7 |
| 5725A Amplifier: | | | | | | | |
| 11 A | 10 | 330 + 470 | 340 + 480 | 350 + 480 | 360 + 480 | 100 + 130 | 110 + 130 |
| 95 % Confidence Level | | | | | | | |
| nA ± (ppm output + nA) | | | | | | | |
| 220 µA | 0.1 | 35 + 8 | 40 + 8 | 45 + 8 | 50 + 8 | 20 + 1.6 | 22 + 1.6 |
| 2.2 mA | 1 | 35 + 8 | 40 + 8 | 45 + 8 | 50 + 8 | 20 + 4 | 22 + 4 |
| 22 mA | 10 | 35 + 80 | 40 + 80 | 45 + 80 | 50 + 80 | 20 + 40 | 22 + 40 |
| µA ± (ppm output + µA) | | | | | | | |
| 220 mA ^[1] | 0.1 | 45 + 0.8 | 50 + 0.8 | 55 + 0.8 | 60 + 0.8 | 22 + 0.25 | 25 + 0.25 |
| 2.2 A ^[1] | 1 | 60 + 25 | 65 + 25 | 75 + 25 | 80 + 25 | 35 + 6 | 40 + 6 |
| 5725A Amplifier: | | | | | | | |
| 11 A | 10 | 330 + 470 | 340 + 480 | 350 + 480 | 360 + 480 | 100 + 130 | 110 + 130 |
| <p>Note:</p> <p>Maximum output from the calibrator's terminals is 2.2 A. Uncertainty specifications for 220 mA and 2.2 mA ranges are increased by a factor of 1.3 when supplied through 5725A terminals.</p> <p>Specifications are otherwise identical for all output locations.</p> <ol style="list-style-type: none"> Add to uncertainty specifications: <ul style="list-style-type: none"> ±200 x I² ppm for >100 mA on 220 mA range ±10 x I² ppm for >1 A on 2.2 A range For fields strengths >0.4 V/m but ≤3 V/m, in the band of 80 MHz to 1 GHz, add 1 % of range. For conducted immunity levels ≥1 V in the band of 150 kHz to 80 MHz on 2.2 mA range, add 0.01 % of range. | | | | | | | |

DC Current Secondary Performance Specifications and Operating Characteristics

| Range | Stability ± 1 °C ^[1] 24 Hours | Temperature Coefficient ^[2] | | Compliance Limits | Burden Voltage Adder ^[3] (±nA/V) | Maximum Load for Full Accuracy ^[4] (Ω) | Noise | |
|--------------|--|--|--------------------------------|-------------------|--|--|--------------------------|---------------------------|
| | | 10 - 40 °C | 0 - 10 °C and 40 - 50 °C | | | | Bandwidth 0.1-10 Hz | Bandwidth 10 Hz-10 kHz |
| | | ± (ppm output + nA) / °C | | | | | pk-pk ppm output + nA | RMS nA |
| 220 µA | 5 + 1 | 1 + 0.40 | 3 + 1 | 10 | 0.2 | 20k | 6 + .9 | 10 |
| 2.2 mA | 5 + 5 | 1 + 2 | 3 + 10 | 10 | 0.2 | 2k | 6 + 5 | 10 |
| 22 mA | 5 + 50 | 1 + 20 | 3 + 100 | 10 | 10 | 200 | 6 + 50 | 50 |
| 220 mA | 8 + 300 | 1 + 200 | 3 + 1 µA | 10 | 100 | 20 | 9 + 300 | 500 |
| 2.2 A | 9 + 7 µA | 1 + 2.5 µA | 3 + 10 µA | 3 ^[5] | 2 µA | 2 | 12 + 1.5 µA | 20 µA |
| 5725A | ± (ppm output + µA) | ± (ppm output + µA) / °C | | | | | ppm output + µA | µA |
| 11 A | 25 + 100 | 20 + 75 | 30 + 120 | 4 | 0 | 4 | 15 + 70 | 175 |

Notes:

Maximum output from the calibrator's terminals is 2.2 A. Uncertainty specifications for 220 mA and 2.2 mA ranges are increased by a factor of 1.3 when supplied through 5725A terminals.

1. Stability specifications are included in the Absolute Uncertainty values for the primary specifications.
2. Temperature coefficient is an adder to uncertainty specifications. It does not apply unless operating more than ±5 °C from calibration temperature.
3. Burden voltage adder is an adder to uncertainty specifications that does not apply unless burden voltage is greater than 0.5 V.
4. For higher loads, multiply uncertainty specification by: $1 + \frac{0.1 \times \text{actual load}}{\text{maximum load for full accuracy}}$
5. The calibrator's compliance limit is 2 V for outputs from 1 A to 2.2 A. 5725A Amplifier may be used in range-lock mode down to 0 A.

Minimum Output: 0 for all ranges, including 5725A.

Settling Time: 1 second for mA and mA ranges; 3 seconds for 2.2 A range; 6 seconds for 11 range; + 1 second for range or polarity change

Overshoot: <5 %

AC Current Specifications

5720A Series II AC Current Specifications: 99 % Confidence Level

| Range | Resolution | Frequency (Hz) | Absolute Uncertainty ± 5 °C from calibration temperature ⁽¹⁾ | | | | Relative Uncertainty ± 1 °C | |
|--|------------|----------------|--|-------------|-------------|-------------|--------------------------------|-------------|
| | | | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| ± (ppm output + nA) | | | | | | | | |
| 220 µA | 1 nA | 10 - 20 | 260 + 20 | 280 + 20 | 290 + 20 | 300 + 20 | 260 + 20 | 280 + 20 |
| | | 20 - 40 | 170 + 12 | 180 + 12 | 190 + 12 | 200 + 12 | 130 + 12 | 150 + 12 |
| | | 40 - 1 k | 120 + 10 | 130 + 10 | 135 + 10 | 140 + 10 | 100 + 10 | 110 + 10 |
| | | 1k - 5 k | 300 + 15 | 320 + 15 | 340 + 15 | 350 + 15 | 250 + 15 | 280 + 15 |
| | | 5k - 10 k | 1000 + 80 | 1100 + 80 | 1200 + 80 | 1300 + 80 | 900 + 80 | 1000 + 80 |
| 2.2 mA | 10 nA | 10 - 20 | 260 + 50 | 280 + 50 | 290 + 50 | 300 + 50 | 260 + 50 | 280 + 50 |
| | | 20 - 40 | 170 + 40 | 180 + 40 | 190 + 40 | 200 + 40 | 130 + 40 | 150 + 40 |
| | | 40 - 1 k | 120 + 40 | 130 + 40 | 135 + 40 | 140 + 40 | 100 + 40 | 110 + 40 |
| | | 1k - 5 k | 210 + 130 | 220 + 130 | 230 + 130 | 240 + 130 | 190 + 130 | 220 + 130 |
| | | 5k - 10 k | 1000 + 800 | 1100 + 800 | 1200 + 800 | 1300 + 800 | 900 + 800 | 1000 + 800 |
| 22 mA | 100 nA | 10 - 20 | 260 + 500 | 280 + 500 | 290 + 500 | 300 + 500 | 260 + 500 | 280 + 500 |
| | | 20 - 40 | 170 + 400 | 180 + 400 | 190 + 400 | 200 + 400 | 130 + 400 | 150 + 400 |
| | | 40 - 1 k | 120 + 400 | 130 + 400 | 135 + 400 | 140 + 400 | 100 + 400 | 110 + 400 |
| | | 1k - 5 k | 210 + 700 | 220 + 700 | 230 + 700 | 240 + 700 | 190 + 700 | 220 + 700 |
| | | 5k - 10 k | 1000 + 6000 | 1100 + 6000 | 1200 + 6000 | 1300 + 6000 | 900 + 6000 | 1000 + 6000 |
| ± (ppm output + µA) | | | | | | | | |
| 220 mA | 1 µA | 10 - 20 | 260 + 5 | 280 + 5 | 290 + 5 | 300 + 5 | 260 + 5 | 280 + 5 |
| | | 20 - 40 | 170 + 4 | 180 + 4 | 190 + 4 | 200 + 4 | 130 + 4 | 150 + 4 |
| | | 40 - 1 k | 120 + 3 | 130 + 3 | 135 + 3 | 140 + 3 | 100 + 3 | 110 + 3 |
| | | 1k - 5 k | 210 + 4 | 220 + 4 | 230 + 4 | 240 + 4 | 190 + 4 | 220 + 4 |
| | | 5k - 10 k | 1000 + 12 | 1100 + 12 | 1200 + 12 | 1300 + 12 | 900 + 12 | 1000 + 12 |
| 2.2 A | 10 µA | 20 - 1 k | 290 + 40 | 300 + 40 | 310 + 40 | 320 + 40 | 260 + 40 | 280 + 40 |
| | | 1 k - 5 k | 440 + 100 | 460 + 100 | 480 + 100 | 500 + 100 | 420 + 100 | 440 + 100 |
| | | 5 k - 10 k | 6000 + 200 | 7000 + 200 | 7500 + 200 | 8000 + 200 | 6000 + 200 | 7000 + 200 |
| 5725A Amplifier: | | | | | | | | |
| 11 A | 100 µA | 40 - 1 k | 370 + 170 | 400 + 170 | 440 + 170 | 460 + 170 | 300 + 170 | 330 + 170 |
| | | 1 k - 5 k | 800 + 380 | 850 + 380 | 900 + 380 | 950 + 380 | 700 + 380 | 800 + 380 |
| | | 5 k - 10 k | 3000 + 750 | 3300 + 750 | 3500 + 750 | 3600 + 750 | 2800 + 750 | 3200 + 750 |
| <p>Note:</p> <p>Maximum output from the calibrator's terminals is 2.2 A. Uncertainty specifications for 220 µA and 2.2 mA ranges are increased by a factor of 1.3 plus 2 µA when supplied through 5725A terminals. For the 5720A 220 µA range, 1 kHz through 5 kHz and 5 kHz through 10 kHz, when the output is coming from the AUX current terminal, use the 5700A Absolute Uncertainty Specifications. Specifications are otherwise identical for all output locations.</p> <p>1. For fields strengths >0.4 V/m but ≤3 V/m, in the band of 80 MHz to 1 GHz, add 1 % of range.</p> | | | | | | | | |

5720A Series II AC Current Specifications: 95% Confidence Level

| Range | Resolution | Frequency (Hz) | Absolute Uncertainty ± 5 °C from calibration temperature ⁽¹⁾ | | | | Relative Uncertainty ± 1 °C | |
|--|------------|----------------|--|------------|-------------|-------------|--------------------------------|------------|
| | | | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| | | | ± (ppm output + nA) | | | | | |
| 220 µA | 1 nA | 10 - 20 | 210 + 16 | 230 + 16 | 240 + 16 | 250 + 16 | 210 + 16 | 230 + 16 |
| | | 20 - 40 | 130 + 10 | 140 + 10 | 150 + 10 | 160 + 10 | 110 + 10 | 130 + 10 |
| | | 40 - 1 k | 100 + 8 | 110 + 8 | 115 + 8 | 120 + 8 | 80 + 8 | 90 + 8 |
| | | 1k - 5 k | 240 + 12 | 250 + 12 | 270 + 12 | 280 + 12 | 200 + 12 | 230 + 12 |
| | | 5k - 10 k | 800 + 65 | 900 + 65 | 1000 + 65 | 1100 + 65 | 700 + 65 | 800 + 65 |
| 2.2 mA | 10 nA | 10 - 20 | 210 + 40 | 230 + 40 | 240 + 40 | 250 + 40 | 210 + 40 | 230 + 40 |
| | | 20 - 40 | 130 + 35 | 140 + 35 | 150 + 35 | 160 + 35 | 110 + 35 | 130 + 35 |
| | | 40 - 1 k | 100 + 35 | 110 + 35 | 115 + 35 | 120 + 35 | 80 + 35 | 90 + 35 |
| | | 1k - 5 k | 170 + 110 | 180 + 110 | 190 + 110 | 200 + 110 | 160 + 110 | 170 + 110 |
| | | 5k - 10 k | 800 + 650 | 900 + 650 | 1000 + 650 | 1100 + 650 | 700 + 650 | 800 + 650 |
| 22 mA | 100 nA | 10 - 20 | 210 + 400 | 230 + 400 | 240 + 400 | 250 + 400 | 210 + 400 | 230 + 400 |
| | | 20 - 40 | 130 + 350 | 140 + 350 | 150 + 350 | 160 + 350 | 110 + 350 | 130 + 350 |
| | | 40 - 1 k | 100 + 350 | 110 + 350 | 115 + 350 | 120 + 350 | 80 + 350 | 90 + 350 |
| | | 1k - 5 k | 170 + 550 | 180 + 550 | 190 + 550 | 200 + 550 | 160 + 550 | 170 + 550 |
| | | 5k - 10 k | 800 + 5000 | 900 + 5000 | 1000 + 5000 | 1100 + 5000 | 700 + 5000 | 800 + 5000 |
| | | | ± (ppm output + µA) | | | | | |
| 220 mA | 1 µA | 10 - 20 | 210 + 4 | 230 + 4 | 240 + 4 | 250 + 4 | 210 + 4 | 230 + 4 |
| | | 20 - 40 | 130 + 3.5 | 140 + 3.5 | 150 + 3.5 | 160 + 3.5 | 110 + 3.5 | 130 + 3.5 |
| | | 40 - 1 k | 100 + 2.5 | 110 + 2.5 | 115 + 2.5 | 120 + 2.5 | 80 + 2.5 | 90 + 2.5 |
| | | 1k - 5 k | 170 + 3.5 | 180 + 3.5 | 190 + 3.5 | 200 + 3.5 | 160 + 3.5 | 170 + 3.5 |
| | | 5k - 10 k | 800 + 10 | 900 + 10 | 1000 + 10 | 1100 + 10 | 700 + 10 | 800 + 10 |
| 2.2 A | 10 µA | 20 - 1 k | 230 + 35 | 240 + 35 | 250 + 35 | 260 + 35 | 200 + 35 | 230 + 35 |
| | | 1 k - 5 k | 350 + 80 | 390 + 80 | 420 + 80 | 450 + 80 | 300 + 80 | 350 + 80 |
| | | 5 k - 10 k | 5000 + 160 | 6000 + 160 | 6500 + 160 | 7000 + 160 | 5000 + 160 | 6000 + 160 |
| 5725A Amplifier: | | | | | | | | |
| 11 A | 100 µA | 40 - 1 k | 370 + 170 | 400 + 170 | 440 + 170 | 460 + 170 | 300 + 170 | 330 + 170 |
| | | 1 k - 5 k | 800 + 380 | 850 + 380 | 900 + 380 | 950 + 380 | 700 + 380 | 800 + 38 |
| | | 5 k - 10 k | 3000 + 750 | 3300 + 750 | 3500 + 750 | 3600 + 750 | 2800 + 750 | 3200 + 750 |
| <p>Note:</p> <p>Maximum output from the calibrator's terminals is 2.2 A. Uncertainty specifications for 220 µA and 2.2 mA ranges are increased by 1.3 plus 2 µA when supplied through 5725A terminals. For the 5720A 220 µA range, 1 kHz through 5 kHz and 5 kHz through 10 kHz, when the output is coming from the AUX current terminal, use the 5700A Absolute Uncertainty Specifications. Specifications are otherwise identical for all output locations.</p> <p>1. For fields strengths >0.4 V/m but ≤3 V/m, in the band of 80 MHz to 1 GHz, add 1 % of range.</p> | | | | | | | | |

5700A Series II AC Current Specifications: 99 % Confidence Level

| Range | Resolution | Frequency(Hz) | Absolute Uncertainty ± 5 °C from calibration temperature ⁽¹⁾ | | | | Relative Uncertainty ± 1 °C | |
|---|------------|---------------|--|---------------|---------------|---------------|--------------------------------|---------------|
| | | | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| | | | ± (ppm output + nA) | | | | | |
| 220 µA | 1 nA | 10 - 20 | 650 + 30 | 700 + 30 | 750 + 30 | 800 + 30 | 450 + 30 | 500 + 30 |
| | | 20 - 40 | 350 + 25 | 380 + 25 | 410 + 25 | 420 + 25 | 270 + 25 | 300 + 25 |
| | | 40 - 1 k | 120 + 20 | 140 + 20 | 150 + 20 | 160 + 20 | 110 + 20 | 120 + 20 |
| | | 1k - 5 k | 500 + 50 | 600 + 50 | 650 + 50 | 700 + 50 | 450 + 50 | 500 + 50 |
| | | 5k - 10 k | 1500 + 100 | 1600 + 100 | 1700 + 100 | 1800 + 100 | 1400 + 100 | 1500 + 100 |
| 2.2 mA | 10 nA | 10 - 20 | 650 + 50 | 700 + 50 | 750 + 50 | 800 + 50 | 450 + 50 | 500 + 50 |
| | | 20 - 40 | 350 + 40 | 380 + 40 | 410 + 40 | 420 + 40 | 270 + 40 | 300 + 40 |
| | | 40 - 1 k | 120 + 40 | 140 + 40 | 150 + 40 | 160 + 40 | 110 + 40 | 120 + 40 |
| | | 1k - 5 k | 500 + 500 | 600 + 500 | 650 + 500 | 700 + 500 | 450 + 500 | 500 + 500 |
| | | 5k - 10 k | 1500 + 1000 | 1600 + 1000 | 1700 + 1000 | 1800 + 1000 | 1400 + 1000 | 1500 + 1000 |
| 22 mA | 100 nA | 10 - 20 | 650 + 500 | 700 + 500 | 750 + 500 | 800 + 500 | 450 + 500 | 500 + 500 |
| | | 20 - 40 | 350 + 400 | 380 + 400 | 410 + 400 | 420 + 400 | 270 + 400 | 300 + 400 |
| | | 40 - 1 k | 120 + 400 | 140 + 400 | 150 + 400 | 160 + 400 | 110 + 400 | 120 + 400 |
| | | 1k - 5 k | 500 + 5000 | 600 + 5000 | 650 + 5000 | 700 + 5000 | 450 + 5000 | 500 + 5000 |
| | | 5k - 10 k | 1500 + 10,000 | 1600 + 10,000 | 1700 + 10,000 | 1800 + 10,000 | 1400 + 10,000 | 1500 + 10,000 |
| ± (ppm output + µA) | | | | | | | | |
| 220 mA | 1 µA | 10 - 20 | 650 + 5 | 700 + 5 | 750 + 5 | 800 + 5 | 450 + 5 | 500 + 5 |
| | | 20 - 40 | 350 + 4 | 380 + 4 | 410 + 4 | 420 + 4 | 280 + 4 | 300 + 4 |
| | | 40 - 1 k | 120 + 4 | 150 + 4 | 170 + 4 | 180 + 4 | 110 + 4 | 130 + 4 |
| | | 1k - 5 k | 500 + 50 | 600 + 50 | 650 + 50 | 700 + 50 | 450 + 50 | 500 + 50 |
| | | 5k - 10 k | 1500 + 100 | 1600 + 100 | 1700 + 100 | 1800 + 100 | 1400 + 100 | 1500 + 100 |
| 2.2 A | 10 µA | 20 - 1 k | 600 + 40 | 650 + 40 | 700 + 40 | 750 + 40 | 600 + 40 | 650 + 40 |
| | | 1 k - 5 k | 700 + 100 | 750 + 100 | 800 + 100 | 850 + 100 | 650 + 100 | 750 + 100 |
| | | 5 k - 10 k | 8000 + 200 | 9000 + 200 | 9500 + 200 | 10,000 + 200 | 7500 + 200 | 8500 + 200 |
| 5725A Amplifier: | | | | | | | | |
| 11 A | 100 µA | 40 - 1 k | 370 + 170 | 400 + 170 | 440 + 170 | 460 + 170 | 300 + 170 | 330 + 170 |
| | | 1 k - 5 k | 800 + 380 | 850 + 380 | 900 + 380 | 950 + 380 | 700 + 380 | 800 + 380 |
| | | 5 k - 10 k | 3000 + 750 | 3300 + 750 | 3500 + 750 | 3600 + 750 | 2800 + 750 | 3200 + 750 |
| Note: Maximum output from the calibrator's terminals is 2.2 A. Uncertainty specifications for 220 µA and 2.2 mA ranges are increased by a factor of 1.3 plus 2 µA when supplied through 5725A terminals. Specifications are otherwise identical for all output locations. 1. For field strengths >0.4 V/m but ≤3 V/m, in the band of 80 MHz to 1 GHz, add 1 % of range. | | | | | | | | |

5700A Series II AC Current Specifications: 95 % Confidence Level

| Range | Resolution | Frequency (Hz) | Absolute Uncertainty ± 5 °C from calibration temperature ⁽¹⁾ | | | | Relative Uncertainty ± 1 °C | |
|---|------------|----------------|--|-------------|-------------|-------------|--------------------------------|-------------|
| | | | 24 Hours | 90 Days | 180 Days | 1 Year | 24 Hours | 90 Days |
| | | | ± (ppm output + nA) | | | | | |
| 220 µA | 1 nA | 10 - 20 | 550 + 25 | 600 + 25 | 650 + 25 | 700 + 25 | 375 + 25 | 400 + 25 |
| | | 20 - 40 | 280 + 20 | 310 + 20 | 330 + 20 | 350 + 20 | 220 + 20 | 250 + 20 |
| | | 40 - 1 k | 100 + 16 | 120 + 16 | 130 + 16 | 140 + 16 | 90 + 16 | 100 + 16 |
| | | 1k - 5 k | 400 + 40 | 500 + 40 | 550 + 40 | 600 + 40 | 375 + 40 | 400 + 40 |
| | | 5k - 10 k | 1300 + 80 | 1400 + 80 | 1500 + 80 | 1600 + 80 | 1200 + 80 | 1200 + 80 |
| 2.2 mA | 10 nA | 10 - 20 | 550 + 40 | 600 + 40 | 650 + 40 | 700 + 40 | 375 + 40 | 400 + 40 |
| | | 20 - 40 | 280 + 35 | 310 + 35 | 330 + 35 | 350 + 35 | 220 + 35 | 250 + 35 |
| | | 40 - 1 k | 100 + 35 | 120 + 35 | 130 + 35 | 140 + 35 | 90 + 35 | 100 + 35 |
| | | 1k - 5 k | 400 + 400 | 500 + 400 | 550 + 400 | 600 + 400 | 375 + 400 | 400 + 400 |
| | | 5k - 10 k | 1300 + 800 | 1400 + 800 | 1500 + 800 | 1600 + 800 | 1200 + 800 | 1200 + 800 |
| 22 mA | 100 nA | 10 - 20 | 550 + 400 | 600 + 400 | 650 + 400 | 700 + 400 | 375 + 400 | 400 + 400 |
| | | 20 - 40 | 280 + 350 | 310 + 350 | 330 + 350 | 350 + 350 | 220 + 350 | 250 + 350 |
| | | 40 - 1 k | 100 + 350 | 120 + 350 | 130 + 350 | 140 + 350 | 90 + 350 | 100 + 350 |
| | | 1k - 5 k | 400 + 4000 | 500 + 4000 | 550 + 4000 | 600 + 4000 | 375 + 4000 | 400 + 4000 |
| | | 5k - 10 k | 1300 + 8000 | 1400 + 8000 | 1500 + 8000 | 1600 + 8000 | 1200 + 8000 | 1200 + 8000 |
| | | | ± (ppm output + µA) | | | | | |
| 220 mA | 1 µA | 10 - 20 | 550 + 4 | 600 + 4 | 650 + 4 | 700 + 4 | 375 + 4 | 400 + 4 |
| | | 20 - 40 | 280 + 3.5 | 310 + 3.5 | 330 + 3.5 | 350 + 3.5 | 220 + 3.5 | 250 + 3.5 |
| | | 40 - 1 k | 100 + 3.5 | 120 + 3.5 | 130 + 3.5 | 140 + 3.5 | 90 + 3.5 | 100 + 3.5 |
| | | 1k - 5 k | 400 + 40 | 500 + 40 | 550 + 40 | 600 + 40 | 375 + 40 | 400 + 40 |
| | | 5k - 10 k | 1300 + 80 | 1400 + 80 | 1500 + 80 | 1600 + 80 | 1200 + 80 | 1200 + 80 |
| 2.2 A | 10 µA | 20 - 1 k | 500 + 35 | 550 + 35 | 600 + 35 | 650 + 35 | 500 + 35 | 550 + 35 |
| | | 1 k - 5 k | 600 + 80 | 650 + 80 | 700 + 80 | 750 + 80 | 550 + 80 | 650 + 80 |
| | | 5 k - 10 k | 6500 + 160 | 7500 + 160 | 8000 + 1600 | 8500 + 160 | 6000 + 160 | 7000 + 160 |
| | | | | | | | | |
| 5725A Amplifier: | | | | | | | | |
| 11 A | 100 µA | 40 - 1 k | 370 + 170 | 400 + 170 | 440 + 170 | 460 + 170 | 300 + 170 | 330 + 170 |
| | | 1 k - 5 k | 800 + 380 | 850 + 380 | 900 + 380 | 950 + 380 | 700 + 380 | 800 + 380 |
| | | 5 k - 10 k | 3000 + 750 | 3300 + 750 | 3500 + 750 | 3600 + 750 | 2800 + 750 | 3200 + 750 |
| <p>Note:</p> <p>Maximum output from the calibrator's terminals is 2.2 A. Uncertainty specifications for 220 A and 2.2 mA ranges are increased by a factor of 1.3 plus 2 µA when supplied through 5725A terminals. Specifications are otherwise identical for all output locations.</p> <p>1. For fields strengths >0.4 V/m but ≤3 V/m, in the band of 80 MHz to 1 GHz, add 1 % of range.</p> | | | | | | | | |

AC Current Secondary Performance Specifications and Operating Characteristics

| Range | Frequency (Hz) | Stability ± 1 °C ^[1] 24 Hours | Temperature Coefficient ^[2] | | Compliance Limits (V rms) | Maximum Resistive Load For Full Accuracy ^[3] (Ω) | Noise and Distortion (Bandwidth 10 Hz - 50 kHz <0.5V Burden) |
|-------------------------|----------------|---|--|--------------------------|---------------------------|---|--|
| | | | 10 - 40 °C | 0 - 10 °C and 40 - 50 °C | | | |
| | | | ± (ppm output + nA)/°C | | | | |
| 220 μA | 10 - 20 | 150 + 5 | 50 + 5 | 50 + 5 | 7 | 2 k ^[6] | 0.05 + 0.1 |
| | 20 - 40 | 80 + 5 | 20 + 5 | 20 + 5 | | | 0.05 + 0.1 |
| | 40 - 1 k | 30 + 3 | 4 + 0.5 | 10 + 0.5 | | | 0.05 + 0.1 |
| | 1 k - 5 k | 50 + 20 | 10 + 1 | 20 + 1 | | | 0.25 + 0.5 |
| | 5 k - 10 k | 400 + 100 | 20 + 100 | 20 + 100 | | | 00.5 + 1 |
| 2.2 mA | 10 - 20 | 150 + 5 | 50 + 5 | 50 + 5 | 7 | 500 | 0.05 + 0.1 |
| | 20 - 40 | 80 + 5 | 20 + 4 | 20 + 4 | | | 0.05 + 0.1 |
| | 40 - 1 k | 30 + 3 | 4 + 1 | 10 + 2 | | | 0.05 + 0.1 |
| | 1 k - 5 k | 50 + 20 | 10 + 100 | 20 + 100 | | | 0.25 + 0.5 |
| | 5 k - 10 k | 400 + 100 | 50 + 400 | 50 + 400 | | | 00.5 + 1 |
| 22 mA | 10 - 20 | 150 + 50 | 50 + 10 | 50 + 10 | 7 | 150 | 0.05 + 0.1 |
| | 20 - 40 | 80 + 50 | 20 + 10 | 20 + 10 | | | 0.05 + 0.1 |
| | 40 - 1 k | 30 + 30 | 4 + 10 | 10 + 20 | | | 0.05 + 0.1 |
| | 1 k - 5 k | 50 + 500 | 10 + 500 | 20 + 400 | | | 0.25 + 0.5 |
| | 5 k - 10 k | 400 + 1000 | 50 + 1000 | 50 + 1000 | | | 00.5 + 1 |
| | Hz | ± (ppm output + μA) | ± (ppm output + μA) / °C | | | | |
| 220 mA | 10 - 20 | 150 + 0.5 | 50 + 0.05 | 50 + 0.05 | 7 | 15 | 0.05 + 10 |
| | 20 - 40 | 80 + 0.5 | 20 + 0.05 | 20 + 0.05 | | | 0.05 + 10 |
| | 40 - 1 k | 30 + 0.3 | 4 + 0.1 | 10 + 0.1 | | | 0.05 + 10 |
| | 1 k - 5 k | 50 + 3 | 10 + 2 | 20 + 2 | | | 0.25 + 50 |
| | 5 k - 10 k | 400 + 5 | 50 + 5 | 50 + 5 | | | 00.5 + 100 |
| 2.2 A | 20 - 1 k | 50 + 5 | 4 + 1 | 10 + 1 | 1.4 ^[4] | 0.5 | 0.5 + 100 |
| | 1 k - 5 k | 80 + 20 | 10 + 5 | 20 + 5 | | | 0.3 + 500 |
| | 5 k - 10 k | 800 + 50 | 50 + 10 | 50 + 10 | | | 0.1 + 1 mA |
| 5725A Amplifier: | | | | | | | ± (% output) |
| 11 A | 40 - 1 k | 75 + 100 | 20 + 75 | 30 + 75 | 3 | 3 | 0.05 ^[5] |
| | 1 k - 5 k | 100 + 150 | 40 + 75 | 50 + 75 | | | 0.12 ^[5] |
| | 5 k - 10 k | 200 + 300 | 100 + 75 | 100 + 75 | | | 0.5 ^[5] |

Notes:

Maximum output from 5720A terminals is 2.2 A. Uncertainty specifications for 220μA and 2.2 mA ranges are increased by a factor of 1.3, plus 2μA when supplied through 5725A terminals. Specifications are otherwise identical for all output locations.

- Stability specifications are included in the Absolute Uncertainty values for the primary specifications.
- Temperature coefficient is an adder to uncertainty specifications that does not apply unless operating more than ±5 °C from calibration temperature.
- For larger resistive loads multiply uncertainty specifications by: $\left(\frac{\text{actual load}}{\text{maximum load for full accuracy}} \right)^2$
- 1.5 V compliance limit above 1 A. 5725A Amplifier may be used in range-lock mode down to 1 A.
- For resistive loads within rated compliance voltage limits.
- For outputs from the Aux Current terminals, the maximum resistive load for full accuracy is 1 kΩ. For larger resistive loads, multiply the uncertainty as described in Note 3.

Minimum Output9 μA for 220 μA range, 10 % on all other ranges. 1 A minimum for 5725A.

Inductive Load Limits400 μH (5700A/5720A, or 5725A). 20 μH for 5700A/5720A output >1 A.

Power Factors5700A/5720A, 0.9 to 1; 5725A, 0.1 to 1. Subject to compliance voltage limits.

Frequency:

Range (Hz)10.000 - 11.999, 12.00 - 119.99, 120.0 - 1199.9, 1.200 k - 10.000 k

 Uncertainty±0.01 %

 Resolution11,999 counts

Settling Time5 seconds for 5700A/5720A ranges; 6 seconds for 5725A 11 A range; +1 second for amplitude or frequency range change.

Overshoot<10 %

Wideband AC Voltage (Option 5700-03) Specifications

Specifications apply to the end of the cable and 50 Ω termination used for calibration.

| Range | | Resolution | Absolute Uncertainty ± 5 °C from calibration temperature 30 Hz - 500 kHz | | | |
|-------------------|------|------------|--|------------|------------|-----------|
| Volts | dBm | | 24 Hours | 90 Days | 180 Days | 1 Year |
| ± (% output + μV) | | | | | | |
| 1.1 mV | -46 | 10 nV | 0.4 + 0.4 | 0.5 + 0.4 | 0.6 + 0.4 | 0.8 + 2 |
| 3 mV | -37 | 10 nV | 0.4 + 1 | 0.45 + 1 | 0.5 + 1 | 0.7 + 3 |
| 11 mV | -26 | 100 nV | 0.2 + 4 | 0.35 + 4 | 0.5 + 4 | 0.7 + 8 |
| 33 mV | -17 | 100 nV | 0.2 + 10 | 0.3 + 10 | 0.45 + 10 | 0.6 + 16 |
| 110 mV | -6.2 | 1 μV | 0.2 + 40 | 0.3 + 40 | 0.45 + 40 | 0.6 + 40 |
| 330 mV | +3.4 | 1 μV | 0.2 + 100 | 0.25 + 100 | 0.35 + 100 | 0.5 + 100 |
| 1.1 V | +14 | 10 μV | 0.2 + 400 | 0.25 + 400 | 0.35 + 400 | 0.5 + 400 |
| 3.5 V | +24 | 10 μV | 0.15 + 500 | 0.2 + 500 | 0.3 + 500 | 0.4 + 500 |

| Frequency (Hz) | Frequency Resolution (Hz) | Amplitude Flatness, 1 kHz Reference Voltage Range | | | Temperature Coefficient ± ppm/°C | Settling Time To Full Accuracy (Seconds) | Harmonic Distortion (dB) |
|--------------------------------|---------------------------|---|------------|------------|----------------------------------|--|--------------------------|
| | | 1.1 mV | 3 mV | > 3 mV | | | |
| ± (% output + floor indicated) | | | | | | | |
| 10 - 30 | 0.01 | 0.3 | 0.3 | 0.3 | 100 | 7 | -40 |
| 30 - 120 | 0.01 | 0.1 | 0.1 | 0.1 | 100 | 7 | -40 |
| 120 - 1.2 k | 0.1 | 0.1 | 0.1 | 0.1 | 100 | 5 | -40 |
| 1.2 k - 12 k | 1 | 0.1 | 0.1 | 0.1 | 100 | 5 | -40 |
| 12 k - 120 k | 10 | 0.1 | 0.1 | 0.1 | 100 | 5 | -40 |
| 120 k - 1.2 M | 100 | 0.2 + 3 μV | 0.1 + 3 μV | 0.1 + 3 μV | 100 | 5 | -40 |
| 1.2 M - 2 M ⁽¹⁾ | 100 k | 0.2 + 3 μV | 0.1 + 3 μV | 0.1 + 3 μV | 100 | 0.5 | -40 |
| 2 M - 10 M | 100 k | 0.4 + 3 μV | 0.3 + 3 μV | 0.2 + 3 μV | 100 | 0.5 | -40 |
| 10 M - 20 M | 1 M | 0.6 + 3 μV | 0.5 + 3 μV | 0.4 + 3 μV | 150 | 0.5 | -34 |
| 20 M - 30 M | 1 M | 1.5 + 15 μV | 1.5 + 3 μV | 1 + 3 μV | 300 | 0.5 | -34 |

Note:

For output voltages < 50 % of full range in the 33 mV, 110 mV, 330 mV, 1.1 V, and 3.5 V ranges, add 0.1 % to the amplitude flatness specification.

Additional Operating Information:

dBm reference = 50Ω

Range boundaries are at voltage points, dBm levels are approximate.

$$\text{dBm} = 10 \log \left(\frac{\text{Power}}{1 \text{ mW}} \right); 0.22361 \text{ V across } 50 \Omega = 1 \text{ mW or } 0 \text{ dBm}$$

- Minimum Output**.....300 μV (-57 dBm)
- Frequency Uncertainty**.....± 0.01 %
- Frequency Resolution**.....11,999 counts to 1.1999 MHz, 119 counts to 30 MHz
- Overload Protection**.....A short circuit on the wideband output will not result in damage. After settling time, normal operation is restored upon removal.

Auxiliary Amplifier Specifications

For complete specifications, see the 5205A and 5220A Operators Manuals.

5205A (220V - 1100 V ac, 0 V - 1100 V dc)

Overshoot: < 10 %

Distortion (bandwidth 10 Hz - 1 MHz):

10 Hz - 20 kHz 0.07 %
 20 kHz - 50 kHz 0.2 %
 50 kHz - 100 kHz 0.25 %

| Frequency (Hz) | 90 Day Accuracy at 23 ± 5 °C ± (% output + % range) | Temperature Coefficient for 0 - 18 °C and 28 - 50 °C ± (ppm output + ppm range) / °C |
|----------------|--|---|
| 0 dc | 0.05 + 0.005 | 15 + 3 |
| 10 - 40 | 0.15 + 0.005 | 45 + 3 |
| 40 - 20 k | 0.04 + 0.004 | 15 + 3 |
| 20 k - 50 k | 0.08 + 0.006 | 50 + 10 |
| 50 k - 100 k | 0.1 + 0.01 | 70 + 20 |

5220A (AC Current, 180-day specifications):

Accuracy:

20 Hz - 1 kHz 0.07 % + 1 mA
 1 kHz - 5 kHz (0.07 % + 1 mA) x frequency in kHz

Temperature Coefficient (0 - 18 °C and 28 - 50 °C):

(0.003 % + 100A) / °C

Distortion (bandwidth 300 kHz):

20 Hz - 1 kHz 0.1% + 1 mA
 1 kHz - 5 kHz (0.1% + 1 mA) x frequency in kHz

Note: 5700A/5720A combined with 5220A is not specified for inductive loads.

Ordering Information

Model

5720A Calibrator
 5700A Series II Calibrator
 5725A Amplifier

Options

5700A-03 Wideband AC Voltage (compatible with both the 5700A and the 5720A)

Upgrade

5700A/EP Upgrade your 5700A Series I Calibrator to 5720A Specifications

Accessories

5440A-7002 Low-Thermal Test Leads, banana plugs
 5440A-7003 Low-Thermal Test Leads, spread lugs
 Y5735 Rack Mount Kit for 5725A
 Y5737 Rack Mount Kit for 5700A and 5720A
 5700A/CASE Transit Case
 5700A-7002 Portable Artifact Calibration Package

Related Models

732B DC Standard
 734A DC Reference Standard
 742A Standard Resistors
 752A Reference Divider
 792A AC/DC Transfer Standard
 5790A AC Measurement Standard

Software

MET/CAL® Plus Automated Calibration Management Software

Fluke Calibration. Precision, performance, confidence.™



| | | | | | |
|------------|----|-------------|----------|------|----------|
| Electrical | RF | Temperature | Pressure | Flow | Software |
|------------|----|-------------|----------|------|----------|

Fluke Calibration
 PO Box 9090,
 Everett, WA 98206 U.S.A.

Fluke Europe B.V.
 PO Box 1186, 5602 BD
 Eindhoven, The Netherlands

For more information call:

In the U.S.A. (877) 355-3225 or Fax (425) 446-5116
 In Europe/M-East/Africa +31 (0) 40 2675 200 or Fax +31 (0) 40 2675 222
 In Canada (800)-36-FLUKE or Fax (905) 890-6866
 From other countries +1 (425) 446-5500 or Fax +1 (425) 446-5116
 Web access: <http://www.flukecal.com>

©2005-2012 Fluke Calibration. Specifications subject to change without notice.
 Printed in U.S.A. 2/2012 1268275G D-EN-N Pub ID 10800-eng, rev 04

Modification of this document is not permitted without written permission from Fluke Calibration.