

# Agilent FieldFox RF Analyzer

**N9912A**

Technical Specifications



## **Documentation Warranty**

THE MATERIAL CONTAINED IN THIS DOCUMENT IS PROVIDED "AS IS," AND IS SUBJECT TO BEING CHANGED, WITHOUT NOTICE, IN FUTURE EDITIONS. FURTHER, TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AGILENT DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED WITH REGARD TO THIS MANUAL AND ANY INFORMATION CONTAINED HEREIN, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. AGILENT SHALL NOT BE LIABLE FOR ERRORS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, USE, OR PERFORMANCE OF THIS DOCUMENT OR ANY INFORMATION CONTAINED HEREIN. SHOULD AGILENT AND THE USER HAVE A SEPARATE WRITTEN AGREEMENT WITH WARRANTY TERMS COVERING THE MATERIAL IN THIS DOCUMENT THAT CONFLICT WITH THESE TERMS, THE WARRANTY TERMS IN THE SEPARATE AGREEMENT WILL CONTROL.

## **DFARS/Restricted Rights Notice**

If software is for use in the performance of a U.S. Government prime contract or subcontract, Software is delivered and licensed as "Commercial computer software" as defined in DFAR 252.227-7014 (June 1995), or as a "commercial item" as defined in FAR 2.101(a) or as "Restricted computer software" as defined in FAR 52.227-19 (June 1987) or any equivalent agency regulation or contract clause. Use, duplication or disclosure of Software is subject to Agilent Technologies' standard commercial license terms, and non-DOD Departments and Agencies of the U.S. Government will receive no greater than Restricted Rights as defined in FAR 52.227-19(c)(1-2) (June 1987). U.S. Government users will receive no greater than Limited Rights as defined in FAR 52.227-14 (June 1987) or DFAR 252.227-7015 (b)(2) (November 1995), as applicable in any technical data.

## Table of Contents

Cable and Antenna Analyzer.....	4
Network Analyzer (Option 303) .....	8
Spectrum Analyzer (Option 230 and 231) .....	12
Preamplifier (Option 235).....	20
Interference Analyzer (Option 236).....	20
Power Meter (Option 302).....	20
General Information.....	21

## Definitions

### **Specification (spec.)**

Warranted performance. Specifications include guardbands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions. The following conditions must be met:

- FieldFox has been turned on at least 90 minutes
- FieldFox is within its calibration cycle
- Storage or operation at 25°C ±5 °C range (unless otherwise stated)

### **Typical (typ.)**

Expected performance of an average unit over a 20 °C to 30 °C temperature range after being at ambient temperature for two hours, unless otherwise indicated; does not include guardbands. It is not covered by the product warranty. The FieldFox must be within its calibration cycle.

### **Nominal (nom.)**

A general, descriptive term or design parameter. It is not tested, and not covered by the product warranty.

### **Calibration**

The process of measuring known standards to characterize an instrument's systematic (repeatable) errors.

### **Corrected (residual)**

Indicates performance after error correction (calibration). It is determined by the quality of calibration standards and how well "known" they are, plus system repeatability, stability, and noise.

### **Uncorrected (raw)**

Indicates instrument performance without error correction. The uncorrected performance affects the stability of a calibration.

## Cable and Antenna Analyzer

Description	Specification	Typical		Supplemental Information
		10 minute warm up	90 minute warm up	
<b>Frequency Range</b>				
Option 104	2 MHz to 4 GHz			
Option 106	2 MHz to 6 GHz			
<b>Frequency Reference</b>				
Accuracy	±2 ppm	±2 ppm		
Aging Rate	±1 ppm/yr	±1 ppm/yr		
Temperature Stability	±1 ppm over 0 to 55 °C	±1 ppm		
<b>Frequency Resolution</b>				
2 MHz to 1.6 GHz	2.5 kHz			
> 1.6 GHz to 3.2 GHz	5 kHz			
> 3.2 GHz to 6 GHz	10 kHz			
<b>Data Points</b>				
	101, 201, 401, 601, 801, 1001			
<b>Measurement Speed</b>				
Return Loss				
1.75 GHz – 3.85 GHz, 1001 points, Cal ON				1.5 ms/point (nominal)
DTF				
0 to 500 ft, 601 points, Cal ON				2.4 ms/point (nominal)
<b>Output Power (RF Out Port)</b>				
High				
2 MHz to 4 GHz				< +8 dBm, +6 dBm (nominal)
> 4 GHz to 6 GHz				< +7 dBm, +2 dBm (nominal)
Low (Typically 31 dB below high power)				
2 MHz to 4 GHz				< -23 dBm, -25 dBm (nominal)
> 4 GHz to 6 GHz				< -24 dBm, -25 dBm (nominal)
<b>Immunity to Interfering Signals</b>				
				+16 dBm (nominal)

## Cable and Antenna Analyzer (continued)

Description	Specification	Typical	
		10 minute warm up	90 minute warm up
<b>Directivity</b>			
Corrected with OSL calibration <sup>1</sup>	>42 dB	>42 dB	
Corrected with QuickCal (Option 111) <sup>3</sup>			≥42 dB
Raw			
2 MHz to 3.5 GHz			> 20 dB
> 3.5 GHz to 6 GHz			> 14 dB
<b>Source Match</b>			
Corrected with OSL calibration <sup>1</sup>	> 36 dB	> 36 dB	
Corrected with QuickCal (Option 111) <sup>3</sup>			≥35 dB
Raw			
2 MHz to 3 GHz			> 25 dB
> 3 GHz to 6 GHz			> 16 dB
<b>Reflection Tracking</b>			
Corrected with OSL calibration <sup>1</sup>	±0.06 dB	±0.06 dB	
Corrected with QuickCal (Option 111) <sup>3</sup>			±0.15 dB
<b>Reflection Dynamic Range</b>			
Reflection (RF Out port) (High power out)			
2 MHz to 4 GHz		60 dB	
> 4 GHz to 6 GHz		55 dB	
<b>Maximum Measurable Cable Loss Using 1–Port CAT Measurement Model <sup>2</sup></b>			
			Refl Dyn Range /2
<b>Transmission Dynamic Range(Option 110)</b>			
300 Hz IF Bandwidth			
2 MHz to 2 GHz		72 dB	
> 2 GHz to 3 GHz		67 dB	
> 3 GHz to 5 GHz		58 dB	
> 5 GHz to 6 GHz		49 dB	
<b>Return Loss</b>			
Display Range	0 to 100 dB		
Resolution	0.01 dB		
<b>VSWR</b>			
Display Range	1 to 500		
Resolution	0.01		
<b>Cable Loss</b>			
Display Range	0 to 100 dB		
Resolution	0.01 dB		

## Cable and Antenna Analyzer (continued)


Description	Specification	Supplemental Information
<b>Distance-to-Fault</b>		
Horizontal Range	Range = [(number of points – 1) / frequency span * 2] * velocity factor * speed of light	Number of points auto coupled according to start and stop distance entered
Horizontal Resolution	Resolution = Range / (number of points – 1)	Number of points settable by user
Bandpass Mode Window Types		Maximum, medium, and minimum windows

<sup>1</sup> Using recommended calibration kits.

<sup>2</sup> Higher cable losses can be measured using transmission or S21 measurements. Cable losses measured in transmission mode limited by transmission dynamic range.

<sup>3</sup> QuickCal is performed with the connect LOAD step.

**Figure 1: CAT Mode, Type-N Calibration Kit – Magnitude (Specification)**

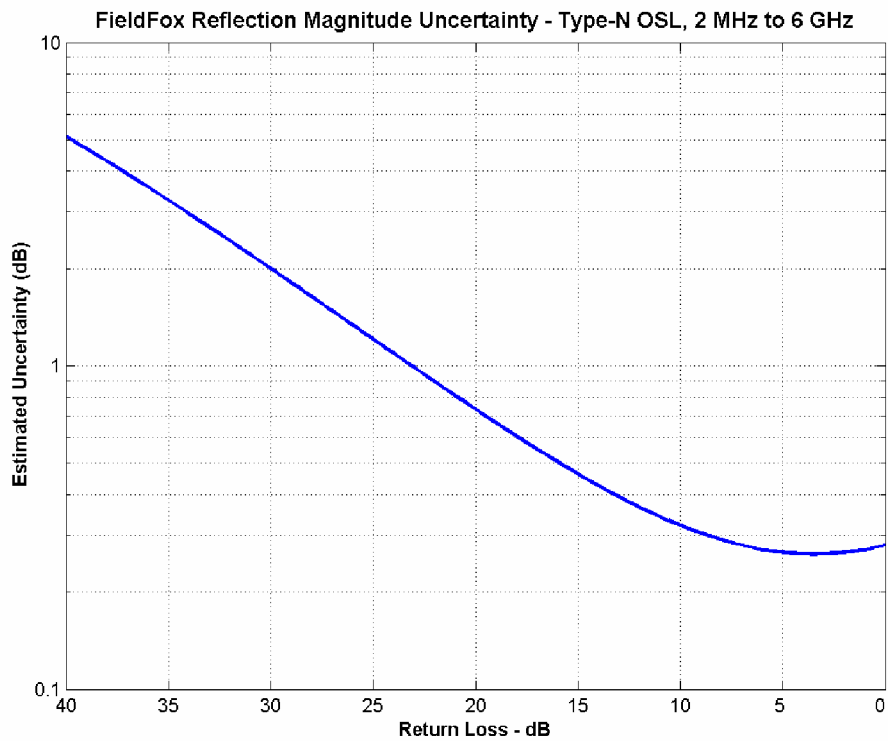

## Cable and Antenna Analyzer (continued)

Figure 2: CAT Mode, QuickCal – Magnitude (Typical)


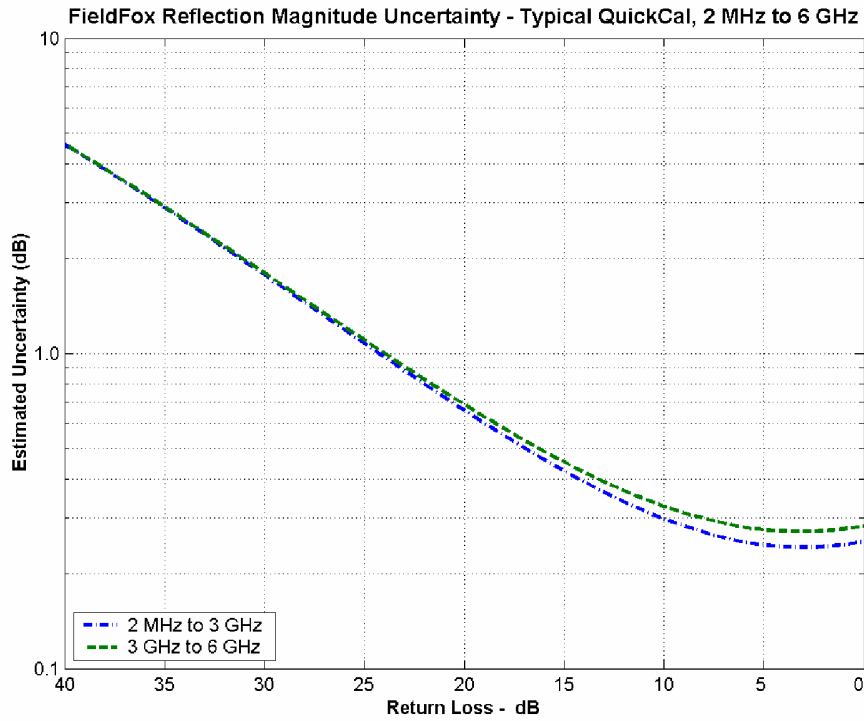


Figure 3: CAT Mode, Preset Cal – Magnitude (Typical)

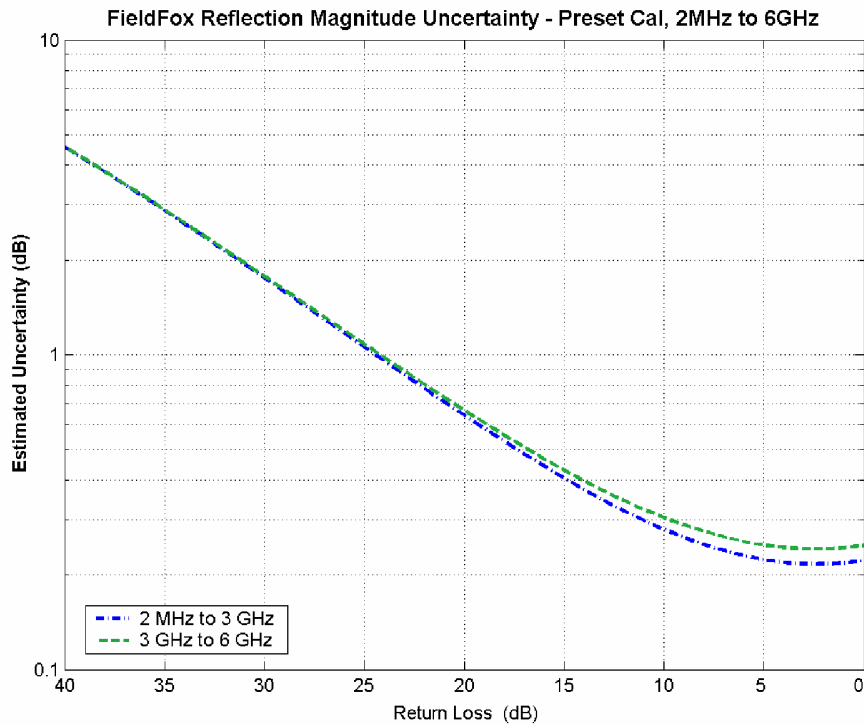

## Network Analyzer (Option 303)

The following CAT mode performance parameters apply to NA mode: frequency accuracy, frequency resolution, output power, directivity, source match, reflection tracking, and reflection and transmission dynamic range. NA mode performance that is in addition to CAT mode is listed in the table below.

Description	Specification	Supplemental Information
<b>Frequency Range</b>		
	2 MHz to 4 GHz	Option 104
	2 MHz to 6 GHz	Option 106
<b>Measurements</b>		
		S11 magnitude and phase S21 magnitude (option 110) A receiver magnitude R receiver magnitude
<b>Formats</b>		
		Log magnitude, Linear magnitude, VSWR, Phase Smith Chart, Polar, Group delay
<b>Measurement Speed</b>		
S11: 1.75 GHz – 3.85 GHz, 1001 Points, Cal ON		1.5 ms/point (nominal)
S21: 1.78 GHz – 2.06 GHz, 201 Points, Cal ON		1.9 ms/point (nominal)
<b>S11 Phase Uncertainty<sup>1</sup></b>		
	See Figure 5 on following page	
Display Range	–180° to +180°	
<b>System Impedance</b>		
	50Ω (nominal)	75Ω with appropriate adapter and Cal Kit

<sup>1</sup> Using recommended calibration kits.



## Network Analyzer (continued)

Figure 4: NA Mode, Type-N Calibration Kit – Magnitude (Specification)



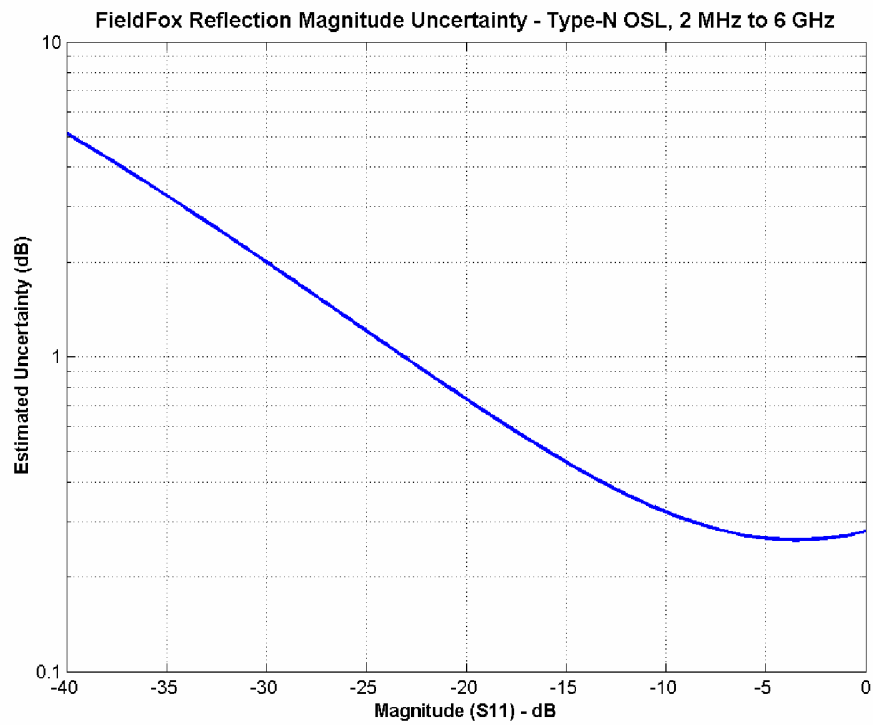


Figure 5: NA Mode, Type-N Calibration Kit – Phase (Specification)

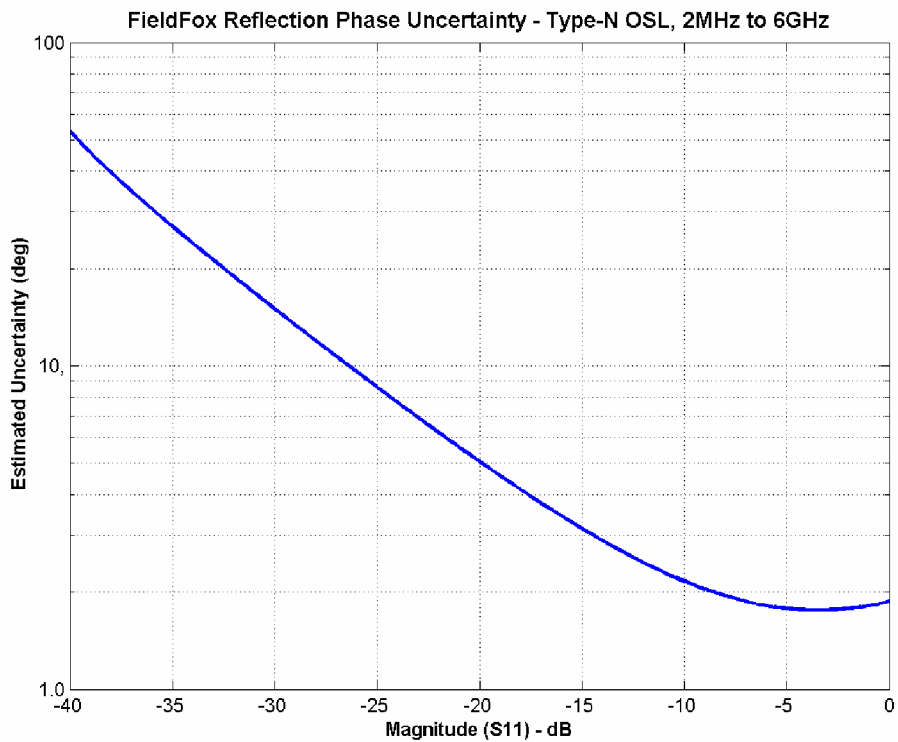

## Network Analyzer (continued)

Figure 6: NA Mode, QuickCal – Magnitude (Typical)

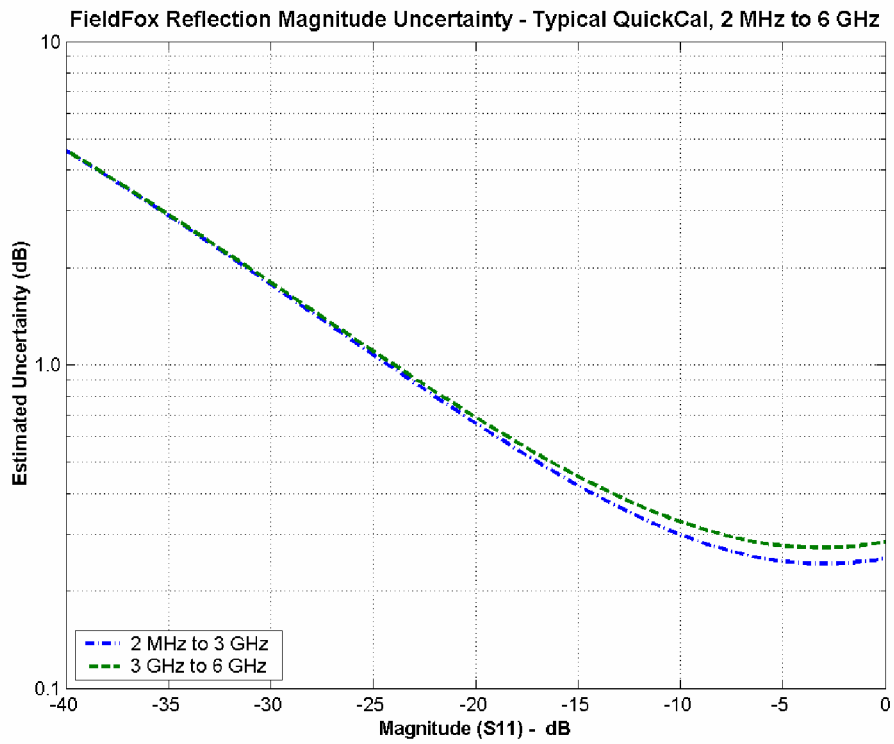

## Network Analyzer (continued)

Figure 7: NA Mode, Preset Cal – Magnitude (Typical)


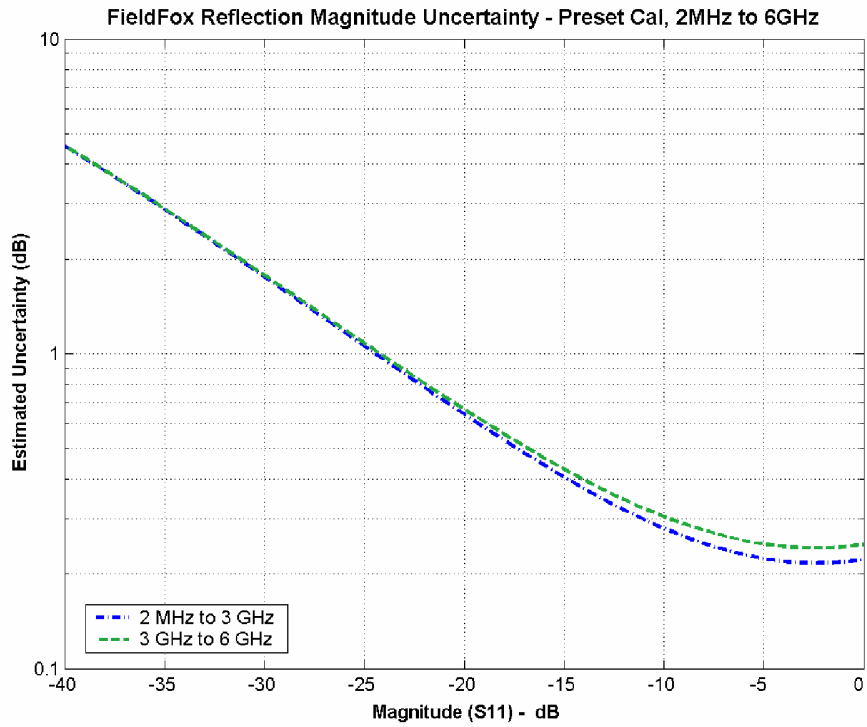


Figure 8: NA Mode, Preset Cal – Phase (Typical)

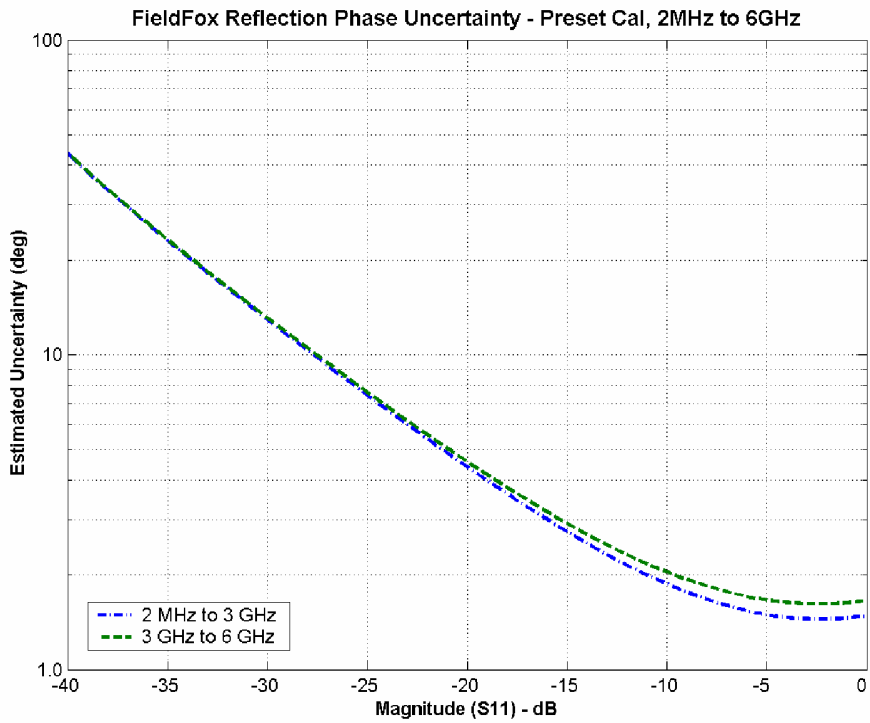

## Spectrum Analyzer (Option 230 and 231)

Description	Specification	Supplemental Information
<b>FREQUENCY</b>		
<b>Frequency Range</b>		
Option 230	100 kHz to 4 GHz	Usable to 5 kHz <sup>1</sup>
Option 231	100 kHz to 6 GHz	Usable to 5 kHz <sup>1</sup> Tunable to 6.1 GHz
<b>Frequency Reference</b>		
Accuracy	±2 ppm	
Aging Rate	± 1 ppm/yr	
Temperature Stability	± 1 ppm over –10 to 55 °C	
<b>Frequency Readout Accuracy (start, stop, center, marker)</b>		
	± (readout frequency x frequency reference accuracy + RBW centering + 0.5 x horizontal resolution)	Horizontal resolution = span/(trace points – 1) RBW centering : 5% x RBW, FFT mode (nominal) 16% x RBW, Step mode (nominal)
<b>Frequency Span</b>		
Range	0 Hz (zero span), 10 Hz to max freq	
Accuracy	±(2 x RBW centering + horizontal resolution)	±(2 x RBW centering + 2 x horizontal resolution) for detector = Normal
Resolution	1 Hz	
<b>Sweep Time, Span = 0 Hz</b>		
Range		
Minimum	1.0 us	
Maximum		
RBW = 2 MHz	2.18 ms	
RBW = 1 MHz	3.28 ms	
RBW = 300 kHz	5.46 ms	
RBW = 100 kHz	16.38 ms	
RBW = 30 kHz	54.60 ms	
RBW = 10 kHz	163.84 ms	
RBW = 3 kHz	546.00 ms	
RBW = 1 kHz	1.64 s	
RBW = 300 Hz	2.54 s	
Resolution	100.0 ns	
Readout	Entered value representing trace horizontal scale range.	

<sup>1</sup>With signal at center frequency.

## Spectrum Analyzer (continued)

Description	Specification	Supplemental Information
<b>Sweep Acquisition, Span &gt; 0 Hz</b>		
Range	1 to 5000. Number of data acquisitions per trace point. Value is normalized to the minimum required to achieve amplitude accuracy with CW signals.	Auto coupled. For pulsed RF signals, manually increase the sweep acquisition value to maximize the pulse spectrum envelope.
Resolution	1	
Readout	Measured value representing time required to tune receiver, acquire data, and process trace.	
<b>Trigger</b>		
Trigger Type	Free Run, Video, External	
Trigger Slope	Positive, Negative edge	
Trigger Delay		
Range	0 to 10 sec	
Resolution	100 nsec	
Auto Trigger	Forces a periodic acquisition in the absence of a trigger event	
Auto Trigger Range	0 sec (OFF) to 10 sec	
<b>Time Gating</b>		
Gate Method	Triggered FFT	
Gate Delay Range	Same as Trigger Delay	
<b>Trace Update</b>		
Span = 20 MHz, RBW = 3 kHz		1.5 updates/s (nominal)
Span = 100 MHz, RBW auto coupled		7 updates/s (nominal)
Span = 6 GHz, RBW auto coupled		1 update/s (nominal)
<b>Trace Points</b>		
	101, 201, 401, 601, 801, 1001 (Defaults to 401)	

## Spectrum Analyzer (continued)

Description	Specification	Supplemental Information
<b>Resolution Bandwidth (RBW)</b>		
Range (–3 dB bandwidth)		
Zero Span	300 Hz to 1 MHz in 1–3–10 sequence; 2 MHz	
Non–Zero Span	10 Hz to 300 kHz in 1/1.5/2/3/5/7.5/10 sequence; 1 MHz, 2 MHz	Step keys change RBW in 1–3–10 sequence
Accuracy		
1 kHz to 1 MHz		± 5% (nominal)
10 Hz to 100 kHz non–zero span		± 1% (nominal)
2 MHz		± 10% (nominal)
300 Hz zero span		± 10% (nominal)
Selectivity (–60 dB/ –3 dB)		4:1 (nominal)
<b>Video Bandwidth (VBW)</b>		
Range	1 Hz to 2 MHz in 1/1.5/2/3/5/7/10 sequence	VBW ≥ RBW in zero span

Description	Specification	Typical	
		10 minute warm up	90 minute warm up
<b>Stability</b>			
Noise Sidebands, CF = 1 GHz			
10 kHz offset	< –85 dBc/Hz	–88 dBc/Hz	–88 dBc/Hz
30 kHz offset		–89 dBc/Hz	–89 dBc/Hz
100 kHz offset		–95 dBc/Hz	–95 dBc/Hz
1 MHz offset		–115 dBc/Hz	–115 dBc/Hz
<b>Measurement Range</b>			
	Displayed average noise level (DANL) to +20 dBm		
Input Attenuator Range	0 to 31 dB		
Resolution	1 dB steps		
<b>Maximum Safe Input Level</b>			
Average Continuous Power	+27 dBm (0.5 W)		
DC	±50 VDC		

## Spectrum Analyzer (continued)

Description	Specification	Typical	
		10 minute warm up	90 minute warm up
<b>Displayed Average Noise Level (DANL)</b>			
Preamplifier OFF			
20 to 30 °C:			
10 MHz to 2.4 GHz			-130 dBm
> 2.4 GHz to 5.0 GHz			-125 dBm
> 5.0 GHz to 6.0 GHz			-119 dBm
Preamplifier ON (Option 235)			
20 to 30 °C:			
10 MHz to 2.4 GHz	< -143 dBm		-148 dBm
> 2.4 GHz to 5.0 GHz	< -140 dBm		-145 dBm
> 5.0 GHz to 6.0 GHz	< -132 dBm		-138 dBm
-10 to 55 °C:			
10 MHz to 2.4 GHz	< -141 dBm		
> 2.4 GHz to 5.0 GHz	< -138 dBm		
> 5.0 GHz to 6.0 GHz	< -130 dBm		
<b>Display Range</b>			
Log Scale	Ten divisions displayed; 0.1 to 1.0 dB/division in 0.1 dB steps, and 1 to 20 dB/division in 1 dB steps		
<b>Trace Detectors</b>			
	Normal, Positive Peak, Negative Peak, Sample, Average		
<b>Trace States</b>			
	Clear/Write, Max Hold, Min Hold, Average, View, Blank		
<b>Number of Traces</b>			
	4		
<b>Number of Averages</b>			
	1 to 10,000		
<b>Reference Level</b>			
Range	-170 dBm to +30 dBm		
Resolution	0.1 dB		
Accuracy	0 dB		

## Spectrum Analyzer (continued)

Description	Specification	Typical	
		10 minute warm up	90 minute warm up
<b>Absolute Amplitude Accuracy at 50 MHz</b>			
Peak detector, 10 dB attenuation, preamplifier off, RBW < 2 MHz, input signal -5 dBm to -50 dBm, all settings auto-coupled			
20 to 30 °C	±0.8 dB	±0.8 dB	±0.4 dB
-10 to 55 °C	±1.1 dB		±0.8 dB
<b>Frequency Response</b>			
Relative to 50 MHz, Peak detector, 10 dB attenuation, preamplifier off, RBW = 30 kHz, input signal 0 dBm to -50 dBm, all settings auto-coupled			
20 to 30 °C:			
2 MHz to 10 MHz	±1.1 dB	±1.0 dB	±0.5 dB
> 10 MHz to 3.0 GHz	±0.9 dB	±0.6 dB	±0.3 dB
> 3.0 GHz to 5.0 GHz	±1.3 dB	±1.1 dB	±0.5 dB
> 5.0 GHz to 6.0 GHz	±1.5 dB	±1.5 dB	±0.5 dB
-10 to 55 °C:			
2 MHz to 10 MHz	±2.0 dB		±1.0 dB
> 10 MHz to 3.0 GHz	±1.5 dB		±0.6 dB
> 3.0 GHz to 5.0 GHz	±2.0 dB		±1.1 dB
> 5.0 GHz to 6.0 GHz	±2.6 dB		±1.5 dB
Preamplifier ON (Option 235)			
20 to 30 °C:			
2 MHz to 10 MHz			±0.7 dB
> 10 MHz to 3.0 GHz			±0.5 dB
> 3.0 GHz to 5.0 GHz			±0.7 dB
> 5.0 GHz to 6.0 GHz			±0.7 dB
-10 to 55 °C:			
2 MHz to 10 MHz			±1.2 dB
> 10 MHz to 3.0 GHz			±0.8 dB
> 3.0 GHz to 5.0 GHz			±1.3 dB
> 5.0 GHz to 6.0 GHz			±1.7 dB



## Spectrum Analyzer (continued)

Description	Specification	Typical		Supplemental Information
		10 minute warm up	90 minute warm up	
<b>Resolution Bandwidth Switching Uncertainty</b>				
	RBW < 2 MHz			0.0 dB 0.7 dB peak-to-peak <sup>3</sup>
<b>Total Absolute Amplitude Accuracy <sup>1</sup></b>				
	Peak detector, 10 dB attenuation, preamplifier off, RBW < 2 MHz, input signal 0 dBm to -50 dBm, all settings auto coupled	Absolute Amplitude at 50 MHz + Frequency Response <sup>4</sup>		
	20 to 30 °C:			
	2 MHz to 10 MHz	±1.8 dB	±1.28 dB	±0.60 dB
	> 10 MHz to 3.0 GHz	±1.5 dB	±1.0 dB	±0.50 dB
	> 3.0 GHz to 5.0 GHz	±1.9 dB	±1.36 dB	±0.60 dB
	> 5.0 GHz to 6.0 GHz	±2.1 dB	±1.7 dB	±0.60 dB
<b>RF Input VSWR</b>				
	At all attenuation settings			1.5:1 (nominal)
<b>Second harmonic distortion (SHI)</b>				
	-30 dBm signal at input mixer <sup>2</sup>			
	2 MHz to 1.35 GHz			< -70 dBc +40 dBm SHI (nominal)
	1.35 GHz to 3.0 GHz			< -80 dBc +50 dBm SHI (nominal)
<b>Third Order Intermodulation Distortion (TOI)</b>				
	Two -30 dBm tones at input mixer			< -96 dBc +18 dBm TOI (nominal)

<sup>1</sup> With signal at center frequency.

<sup>2</sup> Mixer level = RF input level – input attenuation

<sup>3</sup> For signals not at center frequency.

<sup>4</sup> The specification for Total Absolute Amplitude Accuracy is less than the sum of the Absolute Amplitude Accuracy and Frequency Response specifications because redundant uncertainty is removed.

## Spectrum Analyzer (continued)

Description	Supplemental Information
<b>Residual Responses</b>	
Input terminated, 0 dB attenuation, preamplifier off, RBW $\leq$ 1 kHz, VBW auto coupled	
20 MHz to 3 GHz	-90 dBm (nominal)
> 3 GHz to 6 GHz	-85 dBm (nominal)
<b>Spurious Responses</b>	
Input Mixer level -30 dBm	
RFsig = Rftune + 417 MHz	-70 dBc (nominal)
RFsig = Rftune + 1.716 GHz	-80 dBc (nominal)
Input Mixer level -10 dBm; First IF Image Response	
Rfsig = Rftune - 2 x 0.8346 GHz for Rftune 5.7 to 6.0 GHz	-50 dBc (nominal)
Sidebands	-80 dBc (nominal)
	-60 dBc (nominal) when battery charging, 260 kHz offset

# Spectrum Analyzer (continued)

Figure 10


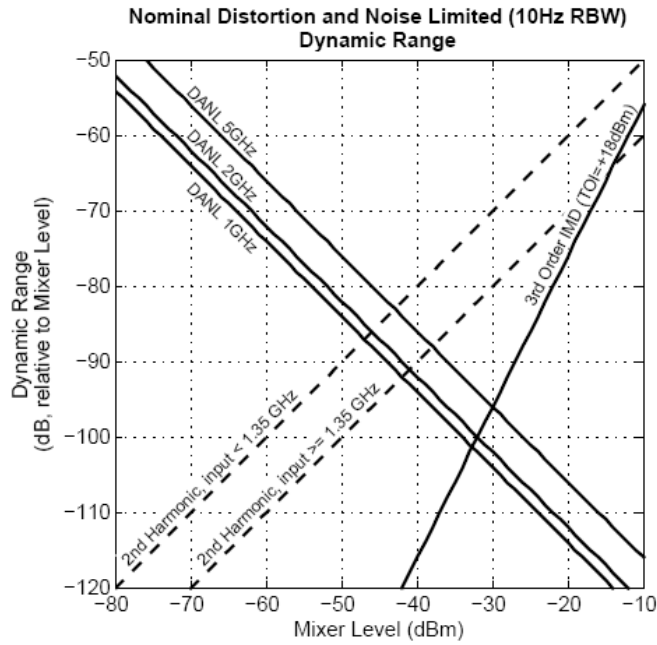


Figure 11

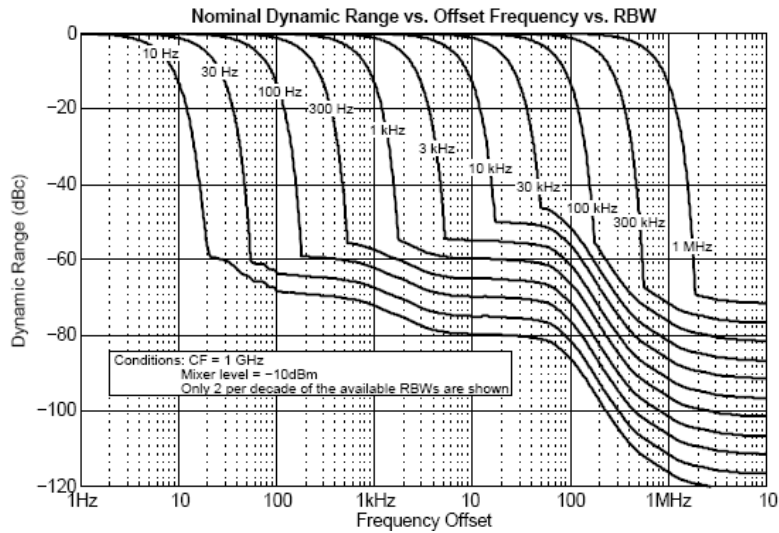

## Spectrum Analyzer (continued)

Description	Specification	Supplemental Information
<b>AM/FM Tune and Listen</b>		
Audio demodulation types	AM, FM Narrow, FM Wide	
Audio Bandwidth	16 kHz	
Receiver IF Bandwidth		
AM	35 kHz	
FM Narrow	12 kHz	
FM Wide	150 kHz	
Listen Time Range	0 to 100 sec.	
<b>Radio Standards</b>		
With a Radio Standard applied, pre-defined frequency bands, channel numbers or Uplink / Downlink selections can be used instead of manual frequency entry. The pre-defined FieldFox Radio Standards include bands such as W-CDMA, LTE, and GSM.		
<b>FieldFox Power Suite Measurement types</b>		
	Channel Power	
	Occupied Bandwidth	
	Adjacent Channel Power Ratio	

## Preamplifier (Option 235)

Description	Specification	Typical 10 minute warm up
<b>Frequency Range</b>		
Option 230	100 kHz to 4 GHz	
Option 231	100 kHz to 6 GHz	
Gain		22 dB

## Interference Analyzer (Option 236)

Description	Specification	Supplemental Information
<b>Display Types</b>		
Spectrogram	Overlay, full screen, top, or bottom with active trace	
Waterfall		
<b>Markers</b>		
	Time, delta time	

## Power Meter (Option 302)

Power Meter (Option 302) supports the Agilent Technologies U2000 Series USB Average Power Sensors. For specifications, refer to the U2000 Series USB Sensor's Data Sheet at <http://www.agilent.com/find/usbsensor>.

## General Information

Description	Specification	Typical	Supplemental Information
<b>Calibration Cycle</b>			
	1 Year		
<b>Environmental</b>			
	<ul style="list-style-type: none"> <li>▪ Agilent Technologies Environmental Test manual (ETM) for Outdoor Equipment<sup>1</sup></li> <li>▪ MIL-PRF-28800F class 2</li> </ul>		
Altitude – Operating	9,144 m (30,000 ft)		Under battery operation AC to DC adapter rated at 3000m
Altitude – Non-Operating	15,240 m (50,000 ft)		
IP Class	30		
<b>Temperature Range</b>			
Operating			
AC Power	-10 to 55 °C		
Battery	-10 to 50 °C	-10 to 55 °C	
Storage	-51 to 71 °C		With the battery pack removed. The battery packs should be stored in an environment with low humidity. Extended exposure to temperature above 45 °C could degrade battery performance and life.
<b>EMC</b>			
Complies with European EMC Directive 2004/108/EC	<ul style="list-style-type: none"> <li>▪ IEC/EN 61326-2-1</li> <li>▪ CISPR Pub 11 Group 1, class A</li> <li>▪ AS/NZS CISPR 11</li> <li>▪ ICES/NMB-001</li> </ul>		When subjected to continuously present radiated electromagnetic phenomena, some degradation of performance may occur
<b>ESD</b>			
	▪ IEC/EN 61000-4-2		Functional up to 20 kV test <sup>1</sup>
<b>Safety</b>			
Complies with European Low Voltage Directive 2006/95/EC	<ul style="list-style-type: none"> <li>▪ IEC/EN 61010-1 2<sup>nd</sup> Edition</li> <li>▪ Canada: CSA C22.2 No. 61010-1-04</li> <li>▪ USA: UL 61010-1 2<sup>nd</sup> Edition</li> </ul>		

## General Information (continued)

Description	Specification	Typical	Supplemental Information
<b>Power</b>			
Power Supply			
External DC Input	15 to 19 VDC		40 W maximum when battery charging
External AC Power Adapter			Efficiency Level IV, 115 VAC
Input	100 to 250 VAC, 50 to 60 Hz 1.25 – 0.56 A		
Output	15 VDC, 4 A		
Power Consumption			
On		12 W	
<b>Battery</b>			
	10.8 V, 4.6 A-h		Lithium ion
Operating Time		4 hours	
Charge Time	A fully discharged battery takes about 1.5 hours to recharge to 80%, 4 hours to 100%		
Discharge Temperature Limits	-10 to 60 °C <sup>2</sup> , ≤ 85% RH		
Charge Temperature Limits	0 to 45 °C <sup>2</sup> , ≤ 85% RH		
Storage Temperature Limits	-20 to 50 °C <sup>2</sup> , ≤ 85% RH		
			The battery packs should be stored in an environment with low humidity. Extended exposure to temperature above 45 °C could degrade battery performance and life
<b>Data Storage</b>			
Internal	Minimum 16 MB		Up to 1000 instrument states and trace
External			Supports USB 2.0 compatible memory devices; Supports miniSD and miniSDHC memory cards
<b>Display</b>			
	6.5" transfective color VGA LED-backlit 640 x 480 with anti-glare coating		
<b>Weight</b>			
	2.8 kg (6.2 lbs) including battery		
<b>Dimensions (H x W x D)</b>			
	292 x 188 x 72 mm (11.5" x 7.4" x 2.8")		

## General Information (continued)

Description	Specification	Typical	Supplemental Information
<b>Inputs &amp; Outputs</b>			
RF Out Port			
Connector	Type-N, female		
Impedance	50 $\Omega$ (nominal)		
Damage Level	> +23 dBm, > $\pm$ 50 VDC		
RF In Port			
Connector	Type-N, female		
Impedance	50 $\Omega$ (nominal)		
Damage Level	> +27 dBm, > $\pm$ 50 VDC		
LO Emissions			
0 dB attenuation, preamplifier off			-65 dBm (nominal)
Headphone Jack Connector	3.5 mm (1/8 inch) miniature audio jack		
USB			
USB-A (2 ports)	Hi-speed USB 2.0		
Mini USB (1 port)	Hi-speed USB 2.0		Provided for future use.
LAN	100Base-T ONLY RJ-45 connector		10Base-T is NOT supported
External Reference /Trigger Input			
Connector	BNC female		
External Reference			
Input Frequency	10 MHz		
Input Amplitude Range			-5 dBm to +10 dBm (nominal)
Impedance			50 $\Omega$ (nominal)
Lock Range			$\pm$ 10 ppm of external reference frequency (nominal)
Trigger Input			
Impedance			10 K $\Omega$ (nominal)
Level Range			
Rising Edge			1.7 V (nominal)
Falling Edge			1 V (nominal)

1 Samples of this product have been type tested in accordance with the Agilent Environmental Test Manual (ETM) for outdoor equipment (OE) and verified to be robust against the environmental stresses of storage, transportation and end use ; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power line conditions.

2 Charge and discharge temperatures are internal temperatures of the battery as measured by a sensor embedded in the battery. The Battery screen displays temperature information. To access the screen, select **System**, **Service Diagnostics**, and **Battery**

### Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

[www.agilent.com/find/removealldoubt](http://www.agilent.com/find/removealldoubt)



### Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.



[www.agilent.com/find/open](http://www.agilent.com/find/open)

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

[www.agilent.com/find/FieldFox](http://www.agilent.com/find/FieldFox)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Phone or Fax

#### Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

#### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	81 426 56 7832
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

#### Europe

Austria	01 36027 71571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	07031 464 6333**
	**0.14 €/minute
Ireland	1890 924 204
Italy	39 02 92 60 8 484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

#### Other European Countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Product specifications and descriptions in this document subject to change without notice.

Manufacturing Part Number: N9912-90006

Printed in USA, August 13, 2010

Supersedes: July 24, 2009

© Agilent Technologies, Inc. 2010



**Agilent Technologies**