



CHIMERA

5-speed 2-port network impairment emulator

Chimera can emulate network impairment at five Ethernet speeds: 100GE, 50GE, 40GE, 25GE and 10GE. This unique flexibility is provided via two physical transceiver cages, both supporting QSFP28 and QSFP+ transceivers.

The result is a versatile solution that provides consistent, accurate, well-defined and repeatable impairments to traffic between DUTs in the lab. Chimera is ideal for benchmarking, stress/negative, “what-if” and regression testing of network infrastructure and Ethernet equipment capable of supporting 100GE such as switches, routers, NICs and fronthaul/ backhaul platforms.

Chimera is easily controlled using ValkyrieCLI scripting, making automation of tests simple from any scripting client (e.g. Tcl, Python or Bash).

TOP FEATURES

- Industry’s only fully integrated traffic generation & impairment solution (Valkyrie & Chimera)
- Multi-speed impairment – 10/25/40/50 & 100GE – in a compact 1U chassis or as a ValkyrieBay test module
- High port density
- Flexible port reservation
- Ease of use
- Free software (incl. ValkyrieManager and ValkyrieCLI scripting)
- Free tech support & training for product



Chimera is available as standalone ChimeraCompact and as a 2-slot test module for the ValkyrieBay

PRODUCT NUMBERS (P/N)

ChimeraCompact: C-Chi-100G-5S-2P
Test module: Chi-100G-5S-2P



SYSTEM OVERVIEW

Management interfaces	2 x Ethernet ports (1G / 10G)	
Interface category	QSFP28 • 100G, 50G, 40G*, 25GE and 10G* Ethernet QSFP+ • 40G, 10G Ethernet * Depending on transceiver capabilities	
Total number of test ports (software configurable)	2x100G, 4x50G, 2x40G, 8x25G, and 8x10G Ethernet	
Interface options	Each cage • 1 x 100GBASE-SR4/LR4/CR4, or • 2 x 50GBASE-SR2/LR2/CR2, or • 1 x 40GBASE-SR4/LR4/CR4, or • 4 x 25GBASE-SR/LR/CR, or • 4 x 10GBASE-SR/LR/CR	802.3bj standard Consortium** 802.3ba 802.3by/Consortium** 802.3ae
	Actual interface options depend on the capabilities of the inserted transceiver. Both cages must run with the same base interface configuration (e.g. 2 x 50G). ** As defined by 25/50 Gigabit Ethernet Consortium	
Forward Error Correction (FEC)	RS-FEC (Reed Solomon) FEC, IEEE 802.3 Clause 91 (100GE) RS-FEC (Reed Solomon) FEC, IEEE 802.3 Clause 108 (25GE) RS-FEC (Reed Solomon) FEC, 25G Ethernet Consortium (25GE)	
Number of transceiver module cages	2 x QSFP28/QSFP+	
Port statistics	Link state, FCS errors, frame and byte counters	
SyncE	Lock Tx clock to recovered Rx clock from any input port (Single clock domain)	
Field upgradeable	System is fully field upgradeable to product releases (FPGA images and software)	
Tx disable	Enable/disable of optical laser	
Oscillator characteristics	<ul style="list-style-type: none"> • Initial Accuracy is 3 ppm • Frequency drift over 1st year: +/- 3 ppm (over 15 years: +/- 15 ppm) • Temperature Stability: +/- 20 ppm (Total Stability is +/- 35 ppm) 	

NOTE: Features in green will be made available in future releases.



100/50/40/25GE FRAMED PRBS AND PCS LAYERS

Link Flap	Programmable single short or repeatable link down events with ms precision
Error Injection (PMA Layer)	Manual single shot bit-errors or bursts, automatic continuous error injection with ms precision
Supported frame sizes	Ethernet packets from 56 to 12288 bytes


FLOWS

Number of flows per port	8 (incl. default flow)
Flow filter definition	MAC Source and Destination Address VLAN Tag (C-Tag and S-Tag) MPLS Label IPv4 Source and Destination Address IPv4 DSCP/TOS IPv6 Source and Destination Address UDP/TCP port numbers Up to 6 consecutive bytes in the packet Xena Test Payload ID (TID)
Flow statistics	Chimera implements impairment counters per flow, including dropped, corrupted, mis-ordered and duplicated packets.
Libraries	Libraries of own impairments

IMPAIRMENT PER FLOW

General	Impairments can be changed dynamically
Packet Manipulation	Packet drop (Random, Burst, Periodic, BER, Gilbert-Elliott) Packet drop up to 100%. Step size: 0.0001%. Duplication Mis-ordering Corruption (Ethernet Frame FCS, IP header Check Sum error, UDP Check Sum error, TCP Check Sum error)
Latency / Jitter	Constant Accumulate & Burst Jitter (Gaussian, Uniform, Exponential) Max. latency lossless 160ms (100GE wire-speed) Step-size 1 μ s, accuracy: +/- 0.5 μ s Max. latency reduced bandwidth 1.6 s (10 s) Min. (Intrinsic) delay: 7 μ s across all speeds
Bandwidth Control	Policing - Step size: 100 kbps Shaping - Step size: 100 kbps

How Chimera processes incoming traffic:

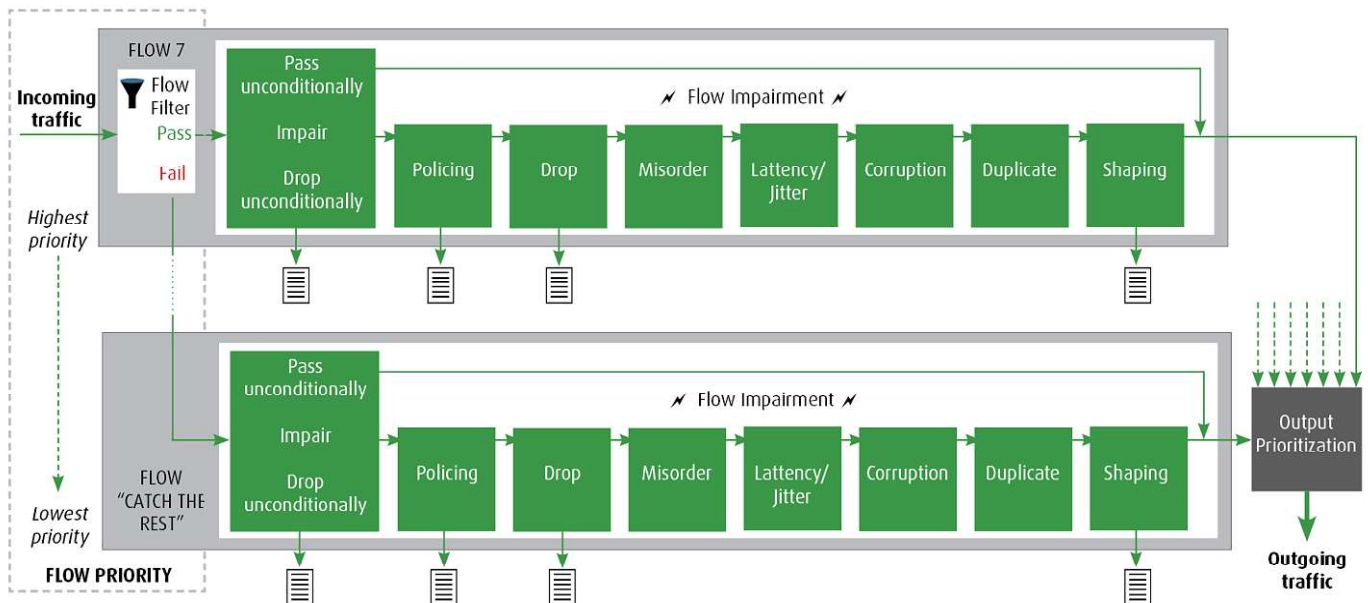


NOTE: Features in green will be made available in future releases.



One module - multiple options

Chimera has 2 transceiver cages. The type of transceiver used determines the speeds and number of ports available. The port number / speed configuration must be the same for both cages and this is defined using ValkyrieManager, Xena's traffic generation and analysis software.

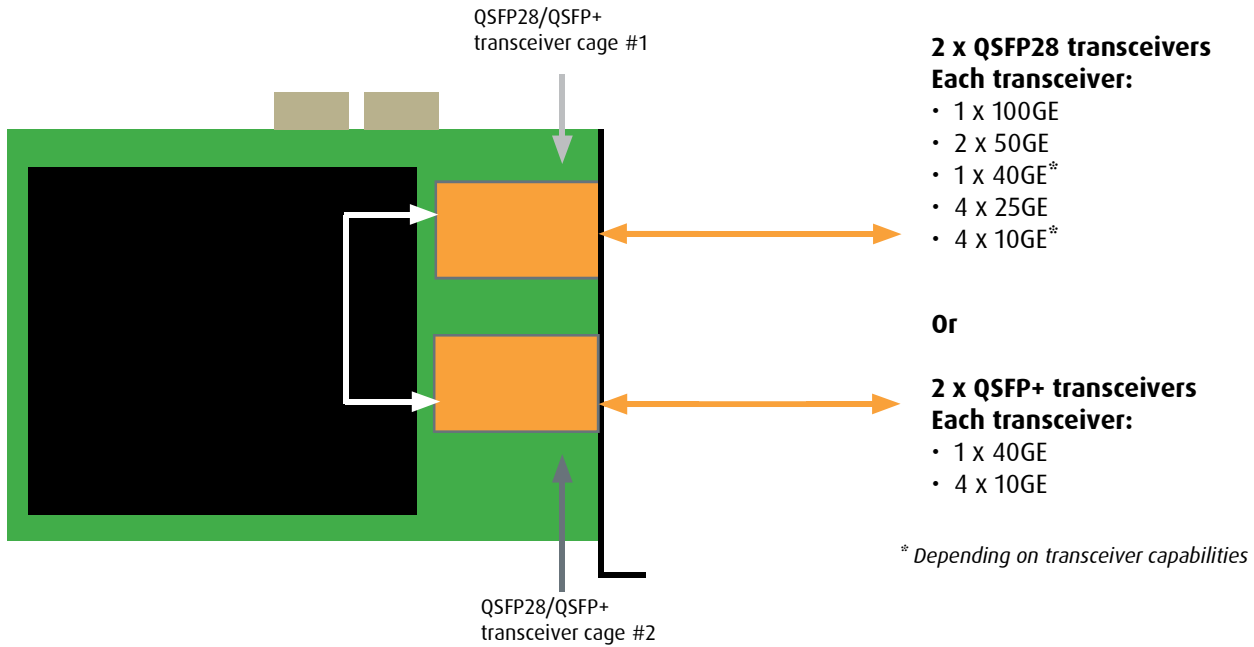

SPECIFICATIONS

Dimensions

1U ChimeraCompact

- W: 19" (48.26 cm)
- H: 1.75" (4.45 cm)
- D: 9.8" (25 cm)
- Weight: 10 lbs (4.5 kg)

Max. Noise

- ChimeraCompact: 49 dBA
- ValkyrieBay: 58.5 dBA

Environmental

- Operating Temperature: 10 to 35° C
- Storage Temperature: -40 to 70° C
- Humidity: 8% to 90% non-condensing

Regulatory

- FCC (US), CE (Europe)

Power

- AC Voltage: 100-240V
- Frequency: 50-60Hz
- Max. Power: 90W (ValkyrieCompact) / 120W (ValkyrieBay)
- Max. Current: 0.8A with 120V supply, and 0.4A with 240V supply

