

Keysight N7004A

# 33 GHz Optical-to-Electrical Converter

Data Sheet



Unlocking Measurement Insights

## Industry's First Fully-Integrated 28 Gbps Optical Input Solution for Infiniium Real-time Oscilloscope



Figure 1. The N7004A is a high-sensitivity 33 GHz O/E converter for Infiniium real-time oscilloscopes.

- DC to 33 GHz typical (-3 dBc, electrical)
- Single-mode and multimode inputs
- 50/125  $\mu\text{m}$ , 750 nm -1650 nm (covers main wavelengths: 850 nm, 1310 nm, and 1550 nm)
- Designed for reference receiver testing of industry optical standards or characterizing raw response of an optical transmitter
- Optical measurement features built into the Infiniium baseline software version 05.70 or higher
- Compatible with Infiniium V-Series, 90000 X-Series, Z-Series and discontinued 90000 Q-Series real-time oscilloscopes

The Keysight N7004A optical-to-electrical converter is a high-sensitivity photodetector module designed for direct optical-to-electrical conversion of optical telecom or data com signals into an Infiniium real-time oscilloscope with AutoProbe II interface.

Traditionally, the sampling oscilloscope is the tool of choice for viewing and measuring optical signals with oscilloscopes. Sampling oscilloscopes provide a myriad of benefits in measuring optical signals with optimized reference receiver, low noise/jitter, and various measurement features optimized to characterize optical signals. On the other hand, real-time oscilloscopes are preferred for ample debug/troubleshooting capabilities and the ability to capture intermittent single-shot events with deep memory and fast sample rates.

The N7004A is the first fully-integrated optical-to-electrical converter solution for Infiniium real-time oscilloscopes. A full suite of optical measurement software is built into the Infiniium baseline software v 05.70 and is offered at no additional cost. The N7004A comes in a compact form factor that is plugged directly into the AutoProbe II probe interface of the Infiniium oscilloscope.

## Industry's First Fully-Integrated 28 Gbps Optical Input Solution for Infiniium Real-time Oscilloscope (Continued)



Figure 2. The N7004A comes in a compact form factor that is plugged directly into the AutoProbe II probe interface of the Infiniium oscilloscope.

The adapter provides from DC to 33 GHz of electrical bandwidth. When used with an Infiniium V-Series or Z-Series 33 GHz oscilloscope, the N7004A allows users to view optical streams at speeds up to 28 Gbps, making this the ideal solution for characterizing or troubleshooting high-speed optical signals in the system level testing. The N7004A with an Infiniium real-time oscilloscope is the ideal solution for users who want to see the unfiltered response of optical transmissions as well.

Each N7004A adapter contains its unique S-parameter correction filter, and this frequency response data is used to flatten the frequency response for more accurate measurement.

The input is a 50  $\mu\text{m}$ /125  $\mu\text{m}$  fiber that can be used with 9  $\mu\text{m}$  single-mode fiber or 50  $\mu\text{m}$  multimode fiber at wavelengths from 750 to 1650 nm and has a FC/PC adaptor. The reference receiver measurement is made with a built-in 4th order Bessel Thomson software filter that allows the waveform to be viewed similarly to what an optical receiver in an actual communication system would display. The 4th order Bessel Thomson filter bandwidth is limited to 2/3 of the Brickwall bandwidth of the oscilloscope. For a 33 GHz oscilloscope with the Bessel Thomson filter on, this yields a 22 GHz Bessel Thomson filter, which covers  $28 \text{ Gbps} \times 0.75 = 21 \text{ GHz}$ .

## Optical and Electrical Characteristics and Specifications

N7004A	
Bandwidth, typical (electrical, -3 dBc)	33 GHz (with Brickwall filter) 22 GHz (with 4th order Bessel Thomson filter)
Bandwidth, warranted (electrical, -3 dBc)	32 GHz (with Brickwall filter) 21.3 GHz (with 4th order Bessel Thomson filter)
Rise time (10 to 90%), typical	13.3 psec (with Brickwall filter) 17.7 psec (with 4th order Bessel Thomson filter)
Rise time (20 to 80%), typical	9.4 psec (with Brickwall filter) 12.3 psec (with 4th order Bessel Thomson filter)
Optical output coupling	DC
Wavelength range	750 to 1650 nm
RMS noise ( $\mu$ W)	See the noise characteristics table
Conversion gain (V/W)	850 nm MM: -68 (min), -75 (typical) 1310 nm MM/SM: -105 (min), -110 (typical) 1550 nm SM: -105 (min), -110 (typical)
Maximum linear input power	4 mW
Maximum non-destructive input power	8 mW
Input return loss (dB)	850 nm MM: -17 (typical), -15 (max) (fully filled fiber) 1310 nm SM: -18.5 (typical), -16 (max) 1550 nm SM: -14 (typical)
Connector type	FC/PC to 50/125 $\mu$ m fiber, compatible with single-mode or multimode fiber
Infiniium software features	Optical measurements in watts, extinction ratio with dark calibration, eye mask testing (including ability to load DCA masks with margin and user defined mask support), power of 1 and 0, optical modulation amplitude, average power, remote command support for all new features
Software compatibility	Infiniium software version 05.70 or higher



Figure 3. A full suite of optical measurement software is built into the Infiniium baseline software.

## Optical and Electrical Characteristics and Specifications (Continued)



Figure 4. The N7004A used with an Infiniium real-time oscilloscope offers user-selectable hardware Brickwall filter and 4th order Bessel Thomson filter, making the system ideal for reference receiver testing of industry standards or characterizing raw response of optical transmitters.

## Noise Characteristics

Displayed noise on Infiniium 33 GHz scope (μWrms)							
Wavelength	Filter	Bandwidth	50 μW/div	100 μW/div	200 μW/div	500 μW/div	1 mW/div
1550 nm	Brickwall	33 GHz	7.5	7.7	12.4	32.8	61.4
	Brickwall	25 GHz	5	5.5	8.8	22.6	42.6
	Brickwall	20 GHz	4	4.6	7.2	18.1	34.2
	4th order BT	21 GHz	5.1	5.5	8.6	18.7	41.6
	4th order BT	7.5 GHz	2.7	3.1	4.5	10.7	20.6
1310 nm	Brickwall	33 GHz	6.6	7.2	11.7	31	58.2
	Brickwall	25 GHz	4.5	5.2	8.4	21.6	41.1
	Brickwall	20 GHz	3.6	4.3	6.8	17.2	33.2
	4th order BT	21 GHz	4.3	4.9	8	20.6	39
	4th order BT	7.5 GHz	2.3	2.7	4.2	10.3	19.8
850 nm	Brickwall	33 GHz	11.1	10.7	16	30.1	57
	Brickwall	20 GHz	5.9	6.1	8.7	17.2	32.1
	Brickwall	10 GHz	4.1	4.3	5.9	11.5	21.4
	4th order BT	21 GHz	7.4	7.4	9	20.2	37.8
	4th order BT	7.5 GHz	4	4.2	5.3	10.6	19.6
	4th order BT	3.8 GHz	3.2	3.3	4.1	7.7	14.1

Note 1:

- 21 GHz BT is for 28 Gbps compliance
- 7.5 GHz BT is for 10 Gbps compliance
- 3.8 GHz BT is for 5 Gbps compliance

Note 2:

Conversion gain at 1550 nm = 120.8 V/W, 1310 nm = 142 V/W, 850 nm = 80.7 V/W

## Environmental Characteristics

Temperature	Operating	+10 to +40 °C (–50 to +104 °F)
	Non-operating	–40 to +70 °C (–40 to +158 °F)
Humidity	80% for temperatures up to 31 °C (87.8 °F) decreasing linearly to 50% relative humidity at 40 °C (104 °F)	

## Mechanical Information

Net weight	350 g (0.77 lbs)
Dimension (W x H x D)	50 mm x 60 mm x 140 mm

## How Much of Oscilloscope Bandwidth Is Needed?

Infiniium real-time oscilloscope bandwidth  $\geq$  Optical data rates in Gbps \* 0.75 \* 3/2

Ex: Oscilloscope bandwidth  $\geq$  10 Gbps \* 0.75 \* 3/2 = 11.25 GHz

Optical data rates	Reference receiver Bessel Thomson bandwidth (=0.75 x data rate)	Needed scope bandwidth (=3/2 of reference receiver bandwidth)	Recommended scope bandwidth (V-Series assumed)
4.25 Gbps	3.1875 GHz	> 4.78 GHz	8 GHz
10 Gbps	7.5 GHz	> 11.25 GHz	13 GHz
25 Gbps	18.75 GHz	> 28.125 GHz	33 GHz
28 Gbps	21 GHz	> 31.5 GHz	33 GHz

## Ordering Information

Model numbers	Description
N7004A	33 GHz optical-to-electrical converter (including 1x optical-to-electrical converter module, 2x Fiber optic FS/FC-A1 connector, 2x FC dust cap and 1x carrying case)



[www.axistandard.org](http://www.axistandard.org)

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. The business that became Keysight was a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. The business that became Keysight was a founding member of the LXI consortium.




[www.pxisa.org](http://www.pxisa.org)

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

## Evolving

Our unique combination of hardware, software, support, and people can help you reach your next breakthrough. **We are unlocking the future of technology.**

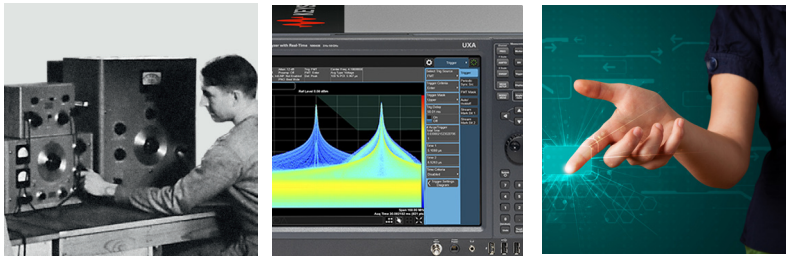

From Hewlett-Packard to Agilent to Keysight

### myKeysight

myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

### KEYSIGHT SERVICES

*Accelerate Technology Adoption.  
Lower costs.*

Keysight Services

[www.keysight.com/find/service](http://www.keysight.com/find/service)

Our deep offering in design, test, and measurement services deploys an industry-leading array of people, processes, and tools. The result? We help you implement new technologies and engineer improved processes that lower costs.

**Three-Year Warranty**

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.

**Keysight Assurance Plans**

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

**Keysight Channel Partners**

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/N7004A](http://www.keysight.com/find/N7004A)



For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-09-23-16)



[www.keysight.com/go/quality](http://www.keysight.com/go/quality)  
Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2015  
Quality Management System