


# Scalable Performance Oscilloscopes

## DPO70000SX Series Datasheet

DPO70000SX provides ultra-high bandwidth real time signal acquisition and analysis up to 70 GHz analog bandwidth. The patented Asynchronous Time Interleaving (ATI) architecture provides the lowest noise and highest fidelity for real time signal acquisition.

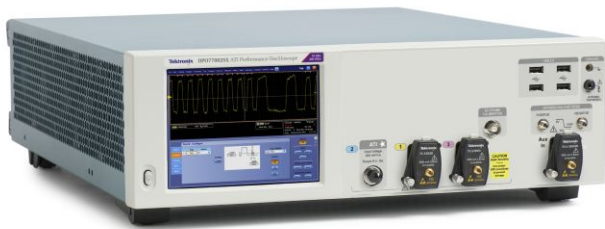

### DPO77002SX Key performance specifications

- 70 GHz analog bandwidth, <6 ps rise time
- Low-noise ATI architecture
- 200 GS/s, 5 ps/Sample real-time sample rate



### DPO73304SX Key performance specifications

- 33 GHz analog bandwidth
- 100 GS/s, 10 ps/Sample real-time sample rate

### Key features

- Superior signal fidelity and excellent signal-to-noise ratio
- Stable and precise multi-channel timing for most accurate analysis
- Compact instrument package with flexibility for future expansion and simple reconfiguration

### Introduction

DPO70000SX-series oscilloscopes provide the most accurate real time performance for ultra-bandwidth applications.

- Low noise, 70 GHz real time signal capture using patented ATI architecture
- Compact 5 1/4" (3U) instrument package for the most versatile multi-channel systems
- Precise, scalable performance using UltraSync multi-unit time synchronization bus
- Highest trigger performance with >25 GHz Edge trigger bandwidth, unique new Envelope trigger

Low-noise, high fidelity signal acquisition is critical in ultra-bandwidth applications such as long-haul coherent optical, 400G datacomm and wideband RF. The flagship DPO77002SX model uses ATI (Asynchronous Time Interleaving) architecture to achieve 70 GHz and 200 GS/s (5 ps/Sample) real time acquisition performance. This patented, symmetric architecture elegantly creates an inherent noise advantage over legacy bandwidth interleaving methods. The DPO70000SX provides the lowest noise, highest fidelity and maximum performance for complex optical modulation analysis, jitter and noise analysis of high speed serial signaling and frequency, phase and modulation analysis of wideband RF signals.

**Connectivity**

- USB host ports on both front and rear panel for quick and easy data storage, printing, keyboard and mouse
- Integrated 10/100/1000 Ethernet port for network connection
- External display interfaces for connection of monitor or projector


**Applications**

- Coherent optical modulation analysis
- Research and defense data acquisition and analysis

**ATI architecture delivers lowest noise**

Current real time scope solutions for digitizing ultra-high bandwidth signals distribute signal energy to two digitizing paths then use DSP to reconstruct the input signal. Unlike legacy schemes, Tektronix' unique ATI architecture provides a symmetric technique that delivers all signal energy to both digitizing paths resulting in an inherent noise advantage.

The diagram shows how an input signal enters the ATI ASIC where it is sampled and alternately delivered to each digitizing subsystem. The sample clock runs at 75 GHz and effectively folds the spectrum of the input signal about 37.5 GHz prior to digitizing. Each digitizing path operates at 100 GS/s and the folded spectrum is band limited to <40 GHz to meet Nyquist criteria. The alternating phase of the sampler has the effect of inverting signal phase 180° in one digitizing path, which provides significant benefit in reconstructing the final digitized signal.

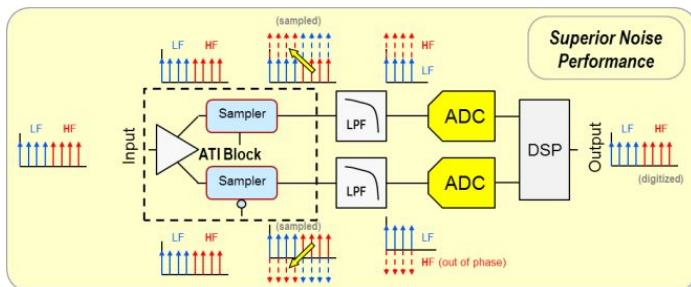

With two copies of the entire signal energy digitized, the signal spectra are "unfolded" using a DSP equivalent of the sampling process and combined to reproduce the input signal. Because two copies of the signal are being combined the process effectively averages them together, reducing random noise. Phase-inversion introduced by the sampling process causes intermediate frequency components to directly cancel one another, simplifying reconstruction and calibration.

Thus, ATI architecture provides an inherent SNR advantage over legacy digital-bandwidth interleaving techniques. These techniques immediately split an input signal into upper and lower bands of frequencies. This divides the power and the upper frequency band must be mixed down prior to digitizing while the lower band is directly digitized. This asymmetric approach can make signal reconstruction and calibration more difficult and lead to errors in pass-band frequency or phase response. The division of power removes the opportunity to reduce signal noise. ATI alleviates these issues by using a unique symmetric architecture.

**Compact ultra-performance oscilloscope**

DPO7000SX-series models establish a unique compact oscilloscope package that enables unprecedented workspace efficiency and mounting versatility. The SX-series provides a differentiated approach to ultra-bandwidth real time acquisition that aligns with user trends toward large external monitors, higher degrees of automation and increased separation of data collection and data analysis workspaces.


Stand-alone DPO7000SX compact models provide functionality equivalent to their bench counterparts (DPO7000DX) at half the height through addition of external display, keyboard and mouse. SX-series models can host Advanced Analysis software and be automated using internal or external control just as their bench counterparts.

The DPO77002SX 70 GHz ATI Performance Oscilloscope provides one channel at 70 GHz, 200 GS/s acquisition performance or two channels at 33 GHz, 100 GS/s acquisition. The instrument includes a 70 GHz, 1.85 mm low-noise ATI input channel as well as general purpose TekConnect inputs for versatile probing and signal conditioning options to 33 GHz.

**JNF performance**

An all-new master sample clock design which provides the remarkably low sample clock jitter of 65fs rms, combined with the very low noise performance achieved with ATI, allows the DPO77002SX to reach new levels of jitter noise floor performance. The JNF at 300 mVFS is a mere 123 fs rms, which even rivals lower bandwidth instruments.

The figure shows jitter analysis of 60 GHz sine wave applied to the ATI input. The result shows a clean eye with random jitter RJ <80 fs\_rms.

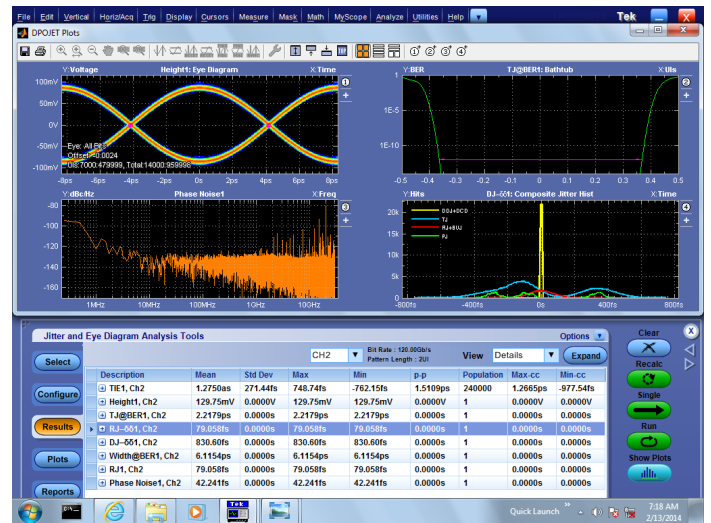

The DPO73304SX model provides two channels at 33 GHz, 100 GS/s acquisition or four channels at 23 GHz, 50 GS/s real time acquisition performance. This model provides acquisition performance similar to the DPO73304DX bench model but in the new compact instrument form-factor.

All models in the DPO7000SX-series achieve the highest level of trigger performance available in real time oscilloscopes, >25 GHz edge trigger performance and <40 ps glitch trigger performance. An innovative new Window trigger type enables triggering on the envelope of RF signal bursts with time-qualification to discriminate envelope width. Industry-leading pulse-width timer performance enables the most precise discrimination of specific bit-widths in high speed serial data streams and detection of "runt" pulses in the midst of pseudo-random signaling. The DPO7000SX-series Auxiliary Trigger input provides low-jitter edge triggering and uses TekConnect accessories for a wide variety of signal conditioning solutions.

### Optimal usability

### Less than half the height of bench models

DPO7000SX-series instruments are contained in a 5 ¼" (3U) package that optimizes space usage and enables the most versatile range of mounting configurations. Two DPO7000SX instruments stack in less height than similar-class bench instruments yet achieve higher measurement performance.

### Complete standalone oscilloscope

This is the start of your concept.

Though compact, SX-series models provide full standalone oscilloscope functionality and performance. They can directly host Tektronix' Advanced Analysis applications for tasks such as jitter, noise, optical modulation or spectral analysis and do not require a separate processor or control unit.



2 x 70 GHz, 4 x 33 GHz configuration with monitor and auxiliary front panel

### Familiar scope controls where you want them

The DPO7AFP Auxiliary Front Panel is a valuable usability accessory that compliments the compact instrument package by enabling users to operate with familiar controls without requiring access to the front of an instrument.



The Auxiliary Front Panel provides the same control set embedded in DPO/ DSA/MSO/7000/70000 bench instruments as a separately packaged USB peripheral. This accessory enhances usability even when the instrument front panel may be obscured due to mounting location.



### Remote desktop operation

As with current bench-model DPO /MSO7000-series instruments, DPO7000SX models can be operated remotely over a network using Windows® Remote Desktop. Use the Windows Remote Desktop utility to access your oscilloscope from across the lab or across the globe.

## Precision synchronization for multi-unit systems

DPO7000SX-series instruments include the Tektronix UltraSync multi-unit time synchronization bus. UltraSync is used to synchronize sample clock, trigger and run-stop control across multiple units with performance equivalent to that found in monolithic scopes. UltraSync cables are available in 1 meter and 2 meter length to maximize configuration and layout versatility while preserving timing integrity of a multi-unit system.

### UltraSync High Performance Synchronization & Control bus



- 12.5 GHz Sample Clock Reference
- Coordinated Trigger
- High speed data path

The UltraSync bus consists of three elements, each providing an important element of precise multi-unit operation:

- UltraSync includes a 12.5 GHz Sample Clock Reference signal sourced by the Master and used by each Extension to synchronize sample placement in the digitizing process.



UltraSync connection on instrument with Master role




UltraSync connection on instrument with Extension role


- The Trigger bus provides Run-Stop control for all members of a multi-unit configuration and enables the trigger source to be from a Master or Extension unit.
- Control & data transfer from Extension units to the Master are managed with a PCIe, Gen 2, x4 link capable of 2 GB/s data transfer rate.

When operating in a multi-unit instrument configuration one DPO7000SX has the role of Master, controlling one or more units operating in Extension mode. Any DPO7000SX model can operate as a standalone oscilloscope or serve as Master or Extension in a multi-unit configuration. Roles are determined by UltraSync cabling and no additional elements are needed. This allows users to decouple multi-unit configurations at any time and operate instruments in a standalone fashion without requiring a control unit or other accessories. Or, standalone units can be easily combined by simply adding UltraSync cables between Master and Extension.

During startup of a multi-unit configuration a Configuration Manager application validates Master-Extension cabling and provides graphical feedback if elements are missing or misconfigured. Following validation, the system presents the TekScope user interface where waveforms from Master and Extension units are gathered for display and analysis using built-in features and Advanced Analysis applications.



Configuration Manager validating Master connections

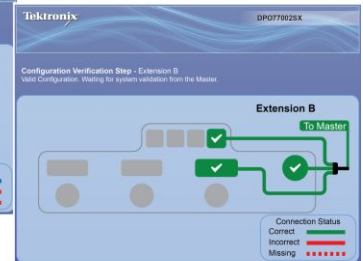

Configuration Manager validating Extension connections

## Scalable performance and versatile configurations

DPO7000SX multi-unit modes enable a variety of extended performance and increased channel-count configurations. Master-Extension configurations provide additional input channels synchronized to the same degree of precision as internal channels and controlled from a single user interface as an interactive instrument or programming interface in automated applications.

This scalable approach to performance allows users to purchase performance suitable for today's requirements, such as four channels of 33 GHz, 100 GS/s acquisition while also having two channels with 70 GHz, 200 GS/s performance suitable for next-generation designs. Subsequently, two additional units can be added for a total of four channels at 70 GHz, 200 GS/s. Units in this four-unit configuration can be separately deployed as pairs or standalone units at any time to meet other test demands.

The DPO77002SX also offers a unique value proposition in single-channel 70 GHz, 200 GS/s applications such as RF analysis or pulsed laser studies. In these cases a user can purchase a single unit for 70 GHz channel performance along with two channels at 33 GHz. Additional units can be purchased at a later time and combined using UltraSync if higher channel count is needed.

The following multi-unit configurations are supported:

- 2 DPO77002SX: 2 Ch @ 70 GHz, 200 GS/s or 4 Ch @ 33 GHz, 100 GS/s
- 4 DPO77002SX: 4 Ch @ 70 GHz, 200 GS/s or 4 Ch<sup>1</sup> @ 33 GHz, 100 GS/s
- 2 DPO73304SX: 4 Ch @ 33 GHz, 100 GS/s or 4 Ch<sup>1</sup> @ 23 GHz, 50 GS/s

<sup>1</sup> Maximum of 4 channels displayed on-screen. Access to additional channels data available through program interface.

## Short signal path

Minimizing input signal path length is especially important when working at 70 GHz ultra-high bandwidth. The compact nature of DPO70000SX creates more versatile mounting options when co-locating instrument and device under test (DUT). Options such as the Auxiliary Front Panel and Remote Desktop connection allow further flexibility by eliminating the need for direct access to the instrument front panel once connected. As a result, the SX-series enables the broadest range of options when dealing with a variety of DUT configurations as compared to classic bench instruments.

Input signal path length may be minimized in multi-unit configurations by inverting one unit of a pair. The low, central location of the 70 GHz ATI input provides very small input connector spacing when operating units in this configuration.

Instruments can also be arranged at various angles to suit DUT layout, such as at right angles for card-and-backplane situation or face-to-face around a small DUT. Layouts such as this create the shortest input signal path and maximize SNR. In addition, effects of signal path elements such as cables and adapters can be characterized and removed using the Serial Data Link Analysis application to obtain the best analysis results and insight.

## Advanced analysis

### Optical modulation analysis


The OM4245 Optical Modulation Analyzer (OMA) is a 45 GHz 1550 nm (C and L-band) fiber-optic test system for visualization and measurement of complex modulated signals, offering a complete solution to testing both coherent and direct-detected transmission systems. The OM4245 consists of a polarization- and phase-diverse receiver and analysis software enabling simultaneous measurement of modulation formats important to advanced fiber communications, including polarization-multiplexed (PM) formats such as QPSK, 8QAM, 16QAM, PAM4, and many others.



DPO70000SX instruments provide precision data for single- and dual-polarization optical analysis when used in conjunction with the OM4245 receiver and analysis software. Two DPO77002SX units support 2-pol 32Gb/s analysis using 4 x 33 GHz, 100 GS/s configuration or 1-pol analysis >60 Gb/s using 70 GHz, 200 GS/s operation. UltraSync multi-unit synchronization provides the extreme sample clock alignment across all channels for accurate results.


A DPO77002SX four-unit configuration supports analysis of 400G Super-channel signals (2-pol) with sufficient bandwidth for coherent analysis up to 80 GBaud.

The OMA software performs all calibration and processing functions to enable real-time burst-mode constellation diagram display, eye-diagram display, Poincaré sphere, and bit-error detection. Color-grade, persistence, and color-key options are available to help you visualize the data. In the figure, the horizontal transitions are more rare than the vertical transitions due to the relative timing of the IQ data sequence (upper middle of figure). The other polarization constellation is shown in color grade with only the symbol points (lower middle). Color grade is also available for the eye diagram (bottom right). Symbols can also be colored to a key indicating prior state. Data shown is 112 Gb/s PM-QPSK.

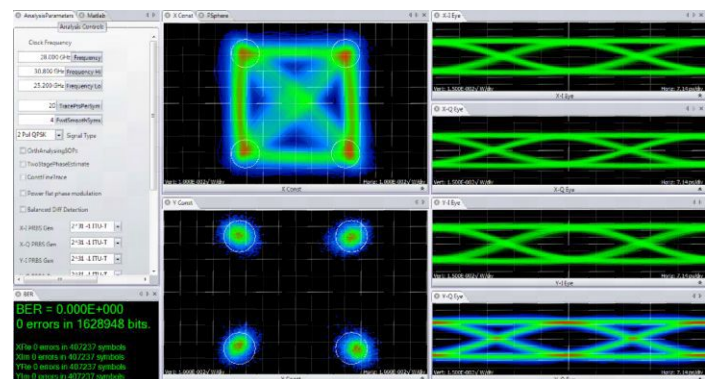

### DPOJET Comprehensive Jitter and Noise Analysis

DPOJET provides engineers the highest measurement sensitivity and accuracy available in real-time instruments. With comprehensive jitter and eye-diagram analysis and decomposition algorithms DPOJET simplifies discovering signal integrity concerns and jitter and their related sources in today's high-speed serial, digital, and communication system designs.

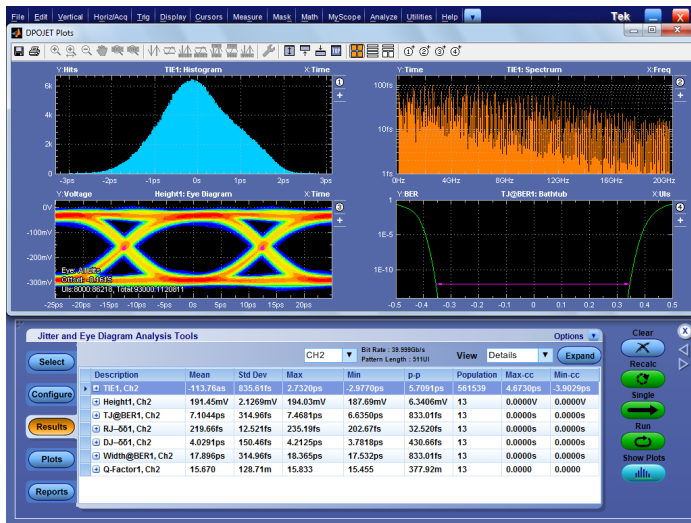

DPOJET Jitter and Eye Diagram Analysis - Simplify identifying signal integrity issues, jitter, and their related sources.


### Noise analysis with DPOJET (Opt. DJAN)

### Jitter essentials, advanced analysis and custom extensions

DPOJET Essentials is standard on the DPO70000SX Series with the DPOJET advanced version available as an option. Application-specific measurement packages are also available that extend DPOJET and perform the extensive set of tests required by industry standard groups. User-defined measurements can be added to DPOJET using the Application Developers Kit (ADK) that comes standard with the oscilloscope.

### SDLA signal path de-embed and custom filters


Acceleration of signaling speeds and shrinking geometries create several challenges for next generation multi-gigabit designs and test methodologies. Designs are evolving to address these challenges with advanced equalization techniques at the transmitter and receiver. Smaller form factors make signal access more difficult resulting in non-ideal probing points. This can lead to loss and reflections on the acquired signal due to impedance discontinuities that are not present at the ideal measurement location. The advanced techniques employed by the designs call for advanced measurement solutions. The challenge begins with the signal acquisition: capturing a signal through cables, probes and fixtures distort the signal shape; SDLA Visualizer allows you to de-embed the effects (reflections, insertion loss, and cross coupling) of the measurement circuit (cables, probes, and fixtures) from the waveform while taking into account the transmitter output and receiver input impedance. De-embedding these effects improves the accuracy of measurements and can make the difference between passing or failing a test.

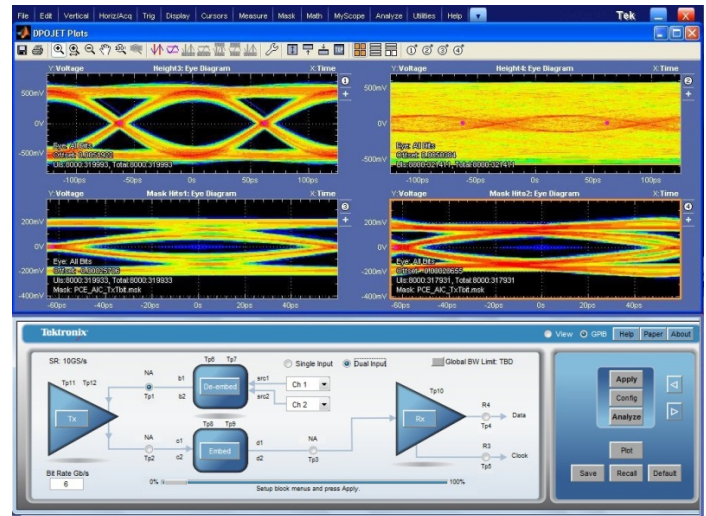

### Signal path equalization

Using the optional Serial Data Link Analysis Visualizer (SDLA) application, you can gain further insight into serial data links with the capability to emulate the serial data channel from its S-parameters, remove reflections, cross-coupling, and loss caused by fixtures, cables, or probes, and open closed eyes caused by channel effects using receiver equalization techniques, such as CTLE, DFE, FFE. IBIS-AMI models for silicon-specific receiver equalization can be used to observe on-chip behavior.

The eye diagrams below illustrate the correlated eye of a signal before a channel, after a channel, and after equalization. Eye closure due to channel effects have effectively been removed using SDLA and in this case the eye widths are within ~3 ps as shown in the eye diagram on the left and right hand sides.

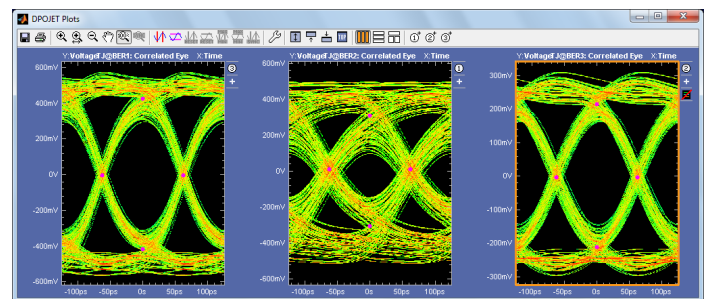

### Custom filters

Create your own filters or use the filters provided standard with the DPO70000SX Series to enhance your ability to isolate or remove a component of your signal (noise or specific harmonics of the signal). These customizable FIR filters can be used to implement signal-processing techniques, such as removing signal pre-emphasis or minimizing the effects of fixtures and cables connected to the device under test.

## SignalVu® vector signal analysis


When vector signal analysis of RF or baseband signals are needed the optional SignalVu application enables measurements in multiple domains (frequency, time, phase, modulation) simultaneously. SignalVu measurements are fully correlated with the scope's time domain acquisition and triggering. Time domain events, such as commands to an RF subsystem, can be used as trigger events, while the subsystem's RF signal can be seen in the frequency domain.

In addition to spectrum analysis, spectrograms display both frequency and amplitude changes over time. Time-correlated measurements can be made across the frequency, phase, amplitude, and modulation domains. This is ideal for signal analysis that includes frequency hopping, pulse characteristics, modulation switching, settling time, bandwidth changes, and intermittent signals.

SignalVu can process RF, I and Q, and differential I and Q signals from any oscilloscope inputs. Math functions applied by the oscilloscope are also used by SignalVu allowing users to apply custom filtering prior to vector signal analysis.


The Microsoft Windows environment makes this multi-domain analysis even easier with an unlimited number of analysis windows, all time-correlated, to provide deeper insight into signal behavior. With a user interface that adapts to your preferences (keyboard, front panel, touch screen, and mouse) SignalVu is easy to apply for both first-time users and experienced hands.

Time-correlated, multi-domain view provides a new level of insight into design or operational problems not possible with conventional analysis solutions. Here, the hop patterns of a narrowband signal can be observed using Spectrogram (lower left) and its hop characteristics can be precisely measured with Frequency vs Time display (upper left). The time and frequency responses can be observed in the two right-hand views as the signal hops from one frequency to the next.

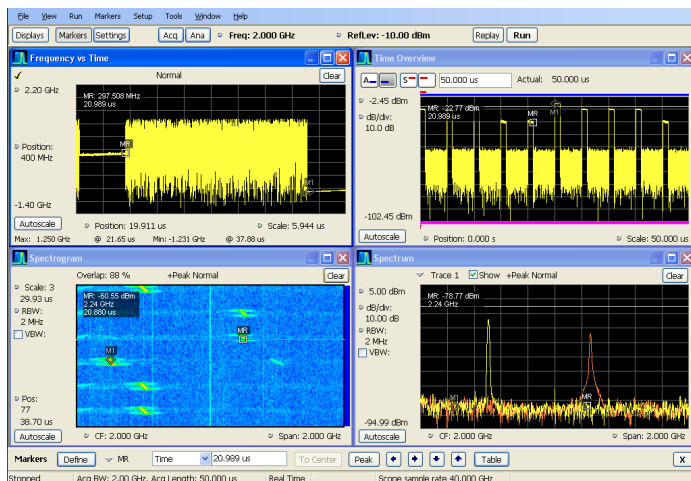

## Options tailored for your wideband applications

SignalVu vector signal analysis software offers options to meet your specific application, whether it be wideband radar characterization, broadband satellite, or spectrum management. SignalVu Essentials (Opt. SVE) provides the fundamental capability for all measurements and is required for pulse analysis (Opt. SVP), settling time (Opt. SVT), digital modulation analysis (Opt. SVM), flexible OFDM analysis (Opt. SVO), and AM/FM/PM Modulation and Audio Measurements (Opt. SVA). Wideband satellite and point-to-point microwave links can be directly observed with SignalVu analysis software.

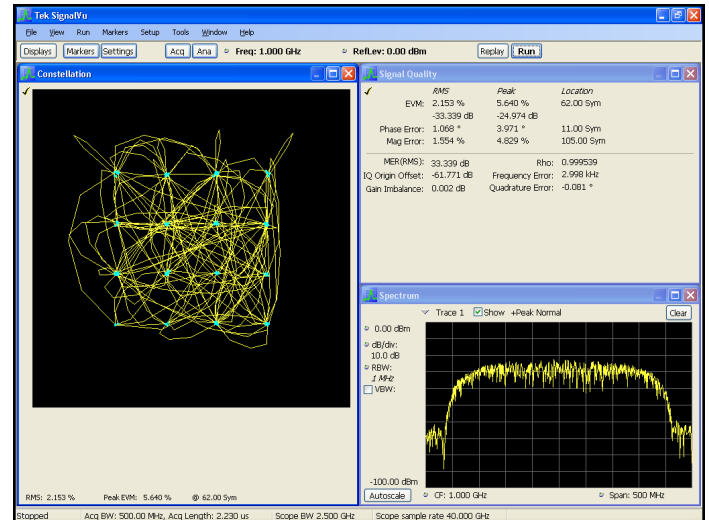

General Purpose Digital Modulation Analysis (Opt. SVM) used to demodulating a 16QAM backhaul link running at 312.5 MS/s.

## Built-in analysis system


DPO7000SX includes a wide variety of built-in features for visualizing and measuring signal behaviors. Select from 54 automatic measurements using a graphical palette that logically organizes measurements into Amplitude, Time, Histogram, and Communications categories. Gather further insight into your measurement results with statistical data such as mean, min, max, standard deviation, and population.

Define and apply math expressions to waveform data for on-screen results in terms that you can use. Access common waveform math functions with the touch of a button. Or, for advanced applications, create algebraic expressions consisting of live waveforms, reference waveforms, math functions, measurement values, scalars, and user-adjustable variables with an easy-to-use calculator-style editor.

With deep acquisition memory, margin testing can be done over many cycles and long duration trends in the data can be observed. Plus, data from the oscilloscope can be captured into Microsoft Excel using the unique Excel toolbar, and formatted into custom reports using the Word toolbar provided with the MSO/DPO7000 Series.

## Custom math expressions with MATLAB


Tektronix custom math expressions with MATLAB enable users to create MATLAB scripts that process live waveform data and return results into scope math traces. Extensions can also use MATLAB features to create specialized analysis and visualizations.

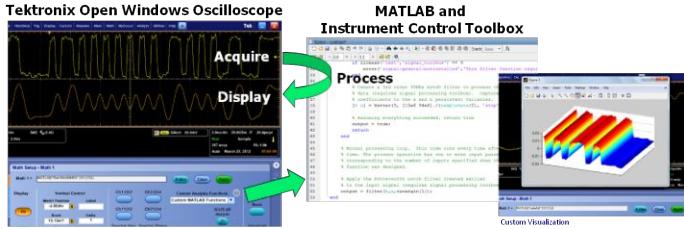

## Pinpoint® trigger

Whether you're trying to find a problem signal or need to isolate a section of a complex signal for further analysis, Tektronix Pinpoint® triggering provides the solution. Pinpoint® triggering allows selection of virtually all trigger types on both A and B trigger events delivering the full suite of advanced trigger types for finding sequential trigger events. Pinpoint® triggers provide trigger reset capabilities that begin the trigger sequence again after a specified time, state, or transition so that even events in the most complex signals can be captured.


The DPO70000SX-series provides the highest trigger system performance available in a real time scope. The figure shows triggering on <50 ps bit-wide runt pulses (fails to cross both thresholds within specified time) on 25.78 GBaud (100GbE) signaling. High system bandwidth and extreme trigger timer precision enable reliable capture of signal aberrations and efficient isolation of fault conditions.

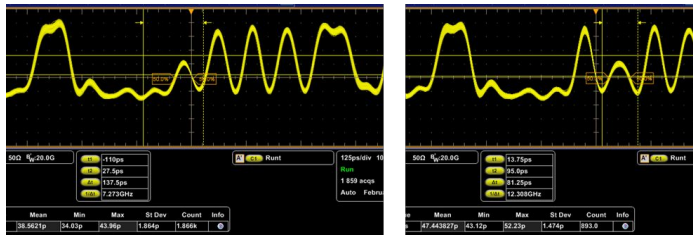


In the next figure, pulse width discrimination is used to isolate pulses >40 ps and <60 ps wide, showing reliable capture of 50 ps pulses within a 20 Gbps PRBS11 sequence.



DPO70000SX includes a unique Envelope trigger mode that enables direct triggering on the envelope of a modulated carrier. Edge, Width and Timeout trigger types can be applied to a detected envelope to provide stable trigger on modulated bursts or discriminate bursts of a specific width. Carrier frequency can range from 500 MHz to 20 GHz to address a broad range of applications. The figure illustrates triggering on burst of specific width.

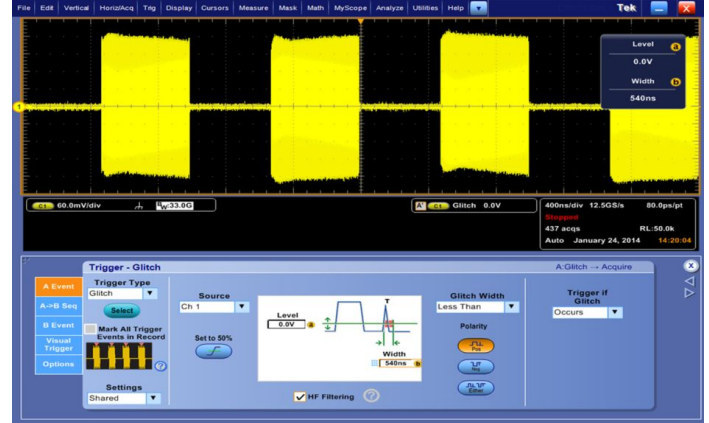

Visual Trigger further extends the Pinpoint Triggering's capabilities, adding another level of trigger qualification to find important events in a wide variety of complex signals. Visual Trigger qualifies Pinpoint triggers by scanning through all waveform acquisitions and comparing them to on-screen areas (geometric shapes). Up to eight areas can be created using a mouse or touchscreen, and a variety of shapes (triangles, rectangles, hexagons, or trapezoids) can be used to specify the desired trigger behavior. Once shapes are created, they can be edited interactively to create ideal trigger conditions

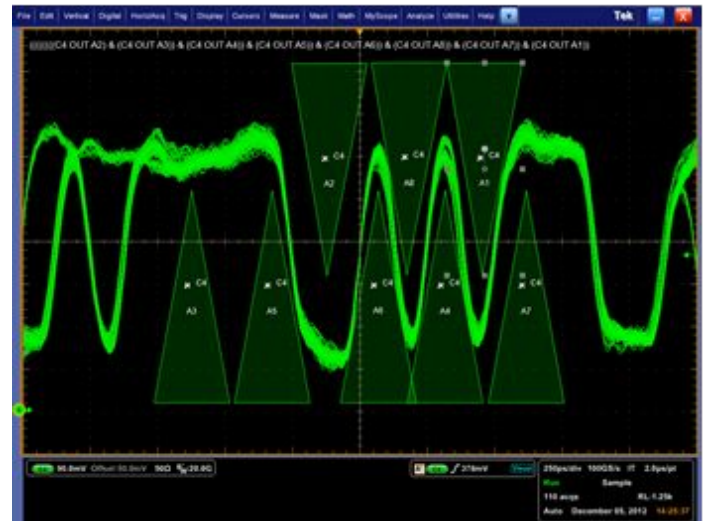



## Signal path solutions

### ATI input

The DPO77002SX 70 GHz ATI input channel uses industry-standard 1.85 mm/V coaxial connection system specified to 67 GHz with typical performance to 70 GHz. The instrument includes a calibration-grade 1.85 mm female-female adapter installed in the ATI input connector (male) to provide mechanical protection and gender selection. Instruments also include a static protection wrist strap, torque wrench and a set of backing wrenches to facilitate proper care and installation of signal path elements, ensuring optimal measurement performance. The 1.85 mm connection system is compatible with 2.4 mm (50 GHz) elements.

### TekConnect® inputs

DPO7000SX models include the TekConnect signal interconnect system, offering unparalleled versatility with a wide array of accessory signal access and conditioning solutions. The TCA-292D TekConnect adapter provides 2.92 mm connection, 50  $\Omega$  coaxial environment to 33 GHz.

### Probing and remote-head coaxial input

Often the biggest challenge in debugging a system is getting access to required signals. Tektronix offers a wide array of probing solutions, including the P7600 and P7500 TriMode® probing system with bandwidths that are well matched to the DPO7000SX Series.

The P7600 and P7500 TriMode® probes allow you to switch among differential, single-ended, and common-mode measurements without moving the probe from its connection points. The P7600 series combines low noise, 33 GHz bandwidth and the convenience of TriMode probing. Coaxial adapters enable the probe to act like a remote-head differential input channel for the oscilloscope which effectively doubles the number of differential signals a single oscilloscope can measure simultaneously.

The P7500 Series offers probes with performance from 4 GHz to 25 GHz and offers several low-cost solder tips with quick connection features that allow moving the probe to various solder points fast and easy.

### High performance Auxiliary Trigger input

DPO7000SX includes an Auxiliary Trigger input (TekConnect) suitable for high performance Edge triggering without consuming an acquisition channel. Aux trigger bandwidth is >10 GHz on the DPO7000SX-series with <1.5 ps<sub>rms</sub> jitter.

## Channel timing deskew

All DPO7000SX models include differential fast-edge outputs matched to <1.6 ps on the front panel that provide a convenient source for aligning channel timing in a coaxial environment. Instruments include accessories to accomplish channel-to-channel timing deskew using the built-in source. Additional accessories can be purchased separately to accomplish even finer time alignment or deskew in a probe-based environment

### Bench or rack mount

DPO7000SX models are equally suited for bench and rack-mounted use and complimented with a number of elements to address specific environments.

UltraSync cables are available in 1 meter and 2 meter lengths to enable configuration flexibility. The default 1 meter cable is suitable for typical two- and four-unit configurations with uniformly stacked instruments. The longer cable enables combinations operating at 90° to one another or face-to-face around a DUT. Cable length can be mixed in a configuration to suit application need and time de-skewed as a system to provide precise channel-to-channel time alignment.

Instrument cases include recesses that align with feet such that stacked units mechanically engage one another for added stability. This feature also works in inverted-stacking configurations and mixed stacks that include an OM4000 Optical Receiver. Models include threaded holes for user-provided side brackets in cases where specific combinations are to be "locked" together.

### Rack environment

The DPO7000SX rack mount is a tray directly attached to the instrument. The tray occupies 1U rack height in addition to the 3U instrument and preserves a cooling channel for the unit. The rack mount also provides heavy-duty carry handles for transporting the instrument outside the rack environment.

The rack-mounting kit allows units to be mounted upright or inverted to minimize input cable length, just as when stacking on a bench.

The DPO7000SX rack-mount tray can also house a front-mounted Solid State Drive (SSD) for easy access to instrument mass storage in a rack environment.

# Specifications<sup>2</sup>

## Model overview

	DPO77002SX		DPS77004SX		DPO73304SX	DPS73308SX
	Single unit		Dual-unit system		Single unit	Dual-unit system
	ATI channel	TekConnect channels	ATI channel	TekConnect channels	TekConnect channels	TekConnect channels
Analog channels/bandwidth	1/70 GHz (typical) 1/67 GHz	2/33 GHz	2/70 GHz (typical) 2/67 GHz	4/33 GHz	2/33GHz, 4/23GHz	4/33GHz, 8/23GHz <sup>3</sup>
Sample rate per channel	200 GS/s	100 GS/s	200 GS/s	100 GS/s	2 ch 100 GS/s, 4 ch 50 GS/s	4 ch 100 GS/s, 8 ch <sup>3</sup> 50 GS/s
Rise time (typical)	10% to 90%: 5.6 ps 20% to 80%: 4.3 ps	10% to 90%: 13 ps 20% to 80%: 9 ps	10% to 90%: 5.6 ps 20% to 80%: 4.3 ps	10% to 90%: 13 ps 20% to 80%: 9 ps	10% to 90%: 13 ps 20% to 80%: 9 ps	10% to 90%: 13 ps 20% to 80%: 9 ps
Vertical Noise (% of full scale), BWE on, max sample rate (typical)	0.83% of full scale	0.71% of full scale	0.83% of full scale	0.71% of full scale	0.71% of full scale	0.71% of full scale
	0.75% of full scale @ 0 V offset (300 mV <sub>FS</sub> )	0.56% of full scale @ 0 V offset (500 mV <sub>FS</sub> )	0.75% of full scale @ 0 V offset (300 mV <sub>FS</sub> )	0.56% of full scale @ 0 V offset (500 mV <sub>FS</sub> )	0.56% of full scale @ 0V offset (500 mV <sub>FS</sub> )	0.56% of full scale @ 0 V offset (500 mV <sub>FS</sub> )
Record length, points (each channel, standard)	62.5 M	62.5 M	62.5 M	62.5 M	62.5 M	62.5 M
Record length (each channel, Opt. 10XL)	125 M	125 M	125 M	125 M	125 M	125 M
Record length (each channel, Opt. 20XL)	250 M	250 M	250 M	250 M	250 M	250 M
Record length (each channel, Opt. 50XL)	1 G	1 G	1 G	1 G	1 G on 2 ch, 500 M on 4 ch	1 G on 2 ch each unit, 500 M on 4 ch each unit
Timing resolution	5 ps (200 GS/s)	10 ps (100 GS/s)	5 ps (200 GS/s)	10 ps (100 GS/s)	10 ps (100 GS/s)	10 ps (100 GS/s)
Duration at highest sample rate (Standard)	313 μs	625 μs	313 μs	625 μs	625 μs	625 μs
Duration at highest sample rate (Opt. 10XL)	625 μs	1.25 ms	625 μs	1.25 ms	1.25 ms	1.25 ms
Duration at highest sample rate (Opt. 20XL)	1.25 ms	2.5 ms	1.25 ms	2.5 ms	2.5 ms	2.5 ms
Duration at highest sample rate (Opt. 50XL)	5.0 ms	10 ms	5.0 ms	10 ms	10 ms	10 ms

<sup>2</sup> All specifications are guaranteed unless noted otherwise.

<sup>3</sup> Maximum of 4 channels displayed on-screen. Additional channels data available through program interface.

## Vertical system - analog channels

**Bandwidth limit** Depending on instrument model: 70 GHz to 1 GHz in 1 GHz steps, or 500 MHz; 5 GHz steps above 35 GHz  
Hardware-only bandwidth settings at 33 GHz available on non-ATI channels. No hardware-only settings available on ATI channel.

**Channel-to-channel isolation (typical)**

<b>TekConnect channels</b>	0 to 9 GHz	≥ 120:1 isolation
	>9 to 12 GHz	≥ 80:1 isolation
	>12 to 15 GHz	≥ 50:1 isolation
	>15 to 20 GHz	≥ 25:1 isolation
	>20 to 33 GHz	≥ 20:1 isolation
<b>ATI channel</b>	≥120:1	

**DC gain accuracy** ± 2%

**Delay between channels, BWE (typical)** ≤ 500 fs between any two channels within the same box at any gain setting at 25 °C ±5 °C. Derate linearly to ≤ 3 ps at 5 °C and 45 °C.

**Channel skew stability, UltraSync (typical)** ≤ 250 f<sub>RMS</sub> between any two channels between instruments at any gain setting at 25 °C ±5 °C. Derate linearly to ≤ 3 ps at 5 °C and 45 °C.

**Effective number of bits (typical)**

<b>33 GHz TekConnect Channels</b>	≥5.0 bits at settings >160 mVFS, ≥4.3 bits at 63.5 mVFS
<b>70 GHz ATI Channel</b>	≥4.8 bits at settings >200 mVFS, ≥4.2 bits at 100 mVFS

**Signal-to-Noise ratio (typical)** 34 dB

**Input coupling**

**TekConnect channels:** Two modes: DC, 50 ohms to a programmable termination voltage; Ground.

The termination can be connected to a DC voltage:

≤ 1.2 V<sub>FS</sub> settings: -3.5 V to 3.5 V,

> 1.2 V<sub>FS</sub> settings: 0.0 V

**ATI channel:** DC, 50 Ω.

**Input resistance**

≤1.2 V<sub>FS</sub> settings 50 Ω ±3% at 18 to 28 °C (64 to 82 °F)

50 Ω ±4% over 5 to 45 °C (45 to 113 °F)

>1.2 V<sub>FS</sub> settings 50 Ω ±4.4% over 5 to 45 °C (45 to 113 °F)

**Sensitivity range**

**TekConnect channels** 62.5 mV<sub>FS</sub> to 6 V<sub>FS</sub>

**ATI channel** 100 mV<sub>FS</sub> to 300 mV<sub>FS</sub>.

**Vertical system - analog channels**

**Maximum input voltage**

**TekConnect channels:**  $\leq 1.2 V_{FS}$  settings:  
 $\pm 1.5 V$  relative to the termination bias (30 mA maximum)  
 $\pm 5 V$  absolute maximum input  
 $> 1.2 V_{FS}$  settings:  
 $\pm 8 V$ . Limited by maximum  $V_{term}$  current and the attenuator power rating at maximum temperature.

**ATI channel:**  $\pm 0.75 V_{pk}$

**Aux channel:**  $\pm 5.0 V_{pk}$

**Input termination voltage ( $V_{Term}$ ) range, TekConnect channels**

$\leq 1.2 V_{FS}$  settings: -3.5 V to +3.5 V  
 $> 1.2 V_{FS}$  settings: 0 V

**Offset accuracy**

Full scale voltage range	Offset accuracy
100 mV <sub>FS</sub> to 300 mV <sub>FS</sub> (ATI channel) 62.5 mV <sub>FS</sub> to 1.2 V <sub>FS</sub> (TekConnect channels)	$\pm(0.4\%   \text{net offset}   + 0.2\%   \text{net offset} - V_{term} \text{ setting}   + 2.5 \text{ mV} + 1\% \text{ FS})$
$> 1.2 V_{FS}$ to 6 V <sub>FS</sub> (TekConnect channels)	$\pm(0.6\%   \text{net offset}   + 13.4 \text{ mV} + 1\% \text{ FS})$

**Offset range**

TekConnect channels	Full Scale voltage range	Offset range
	62.5 mV <sub>FS</sub> – 1.2 V <sub>FS</sub>	$\pm 3.4 V$
	$> 1.2 V_{FS}$ – 6 V <sub>FS</sub>	$\pm 6 V$
ATI channel	Full Scale voltage range	Offset range
	100 mV <sub>FS</sub> – 300 mV <sub>FS</sub>	$\pm 300 \text{ mV} - (10 \text{ div} \times \text{Volts/div})$

**Frequency response tolerance**

All modes, BWE on, 18 °C to 28 °C (typical)

**TekConnect channel:** Step settings TekConnect channels: 77.5 mV<sub>FS</sub>, 151 mV<sub>FS</sub>, 302 mV<sub>FS</sub>, 605 mV<sub>FS</sub>, 1210 mV<sub>FS</sub>, 1620 mV<sub>FS</sub>, 3240 mV<sub>FS</sub>  
 $\pm 0.5 \text{ dB}$  from DC to 50% of nominal BW  
 $\pm 1.5 \text{ dB}$  from 50% to 80% of nominal BW  
 All other gain settings:  
 $\pm 1.0 \text{ dB}$  from DC to 50% of nominal BW  
 $\pm 2.0 \text{ dB}$  from 50% to 80% of nominal BW

**ATI channel:** All volts/div settings  
 $\pm 0.5 \text{ dB}$  from DC to 30 GHz  
 $\pm 1.25 \text{ dB}$  from 30 GHz to 67 GHz  
 $+2/-3 \text{ dB}$  from 67 GHz to 70 GHz

**Position range**  $\pm 5$  divisions

**Vertical resolution** 8 bits, (11 bits with averaging)

## Horizontal system

<b>Channel-to-Channel deskew range</b>	±75 ns
<b>Time base accuracy</b>	±0.1 ppm initial accuracy after adjustment, aging during the first year from manufactured date: ±0.8 ppm, additional aging after first year: ±0.3 ppm/year, when operated within 23°C ±5°C after 30 minute warm-up.
<b>Time base delay time range</b>	–5.0 ks to 1.0 ks
<b>Sample Clock Jitter (typical)</b>	<5 µs Duration: 65 fs <sub>RMS</sub>
<b>Trigger jitter (typical)</b>	10 fs using enhanced trigger placement.
<b>Time/Div settings</b>	
<b>ATI channel (only sample rate is 200 GS/s)</b>	Max RT setting: 500 µs/div (with 1G RL, 50XL option) Min RT setting: 25 ps/div Max IT setting: 250 µs/div (with 1G RL, 50XL option) Min IT setting: 500 fs/div
<b>TekConnect channels<sup>4</sup> (at max sample rate of 100 GS/s)</b>	Max RT setting: 1 ms/div (with 1G RL, 50XL option) Min RT setting: 50 ps/div Max IT setting: 10 µs/div (with 1G RL, 50XL option) Min IT setting: 500 fs/div

## Acquisition system

<b>Acquisition modes</b>	
<b>Sample</b>	Acquires and displays sampled values
<b>Average</b>	From 2 to 10,000 waveforms can be included in an average waveform
<b>Envelope</b>	From 1 to 2×10 <sup>9</sup> waveforms included in min-max envelope
<b>Hi-Res</b>	Real-time boxcar averaging reduces random noise and increases resolution
<b>Peak detect</b>	Capture and display narrow glitches at all real-time sampling rates. Glitch widths: 1 ns at ≤125 MS/s; 1/sample rate at ≥250 MS/s
<b>FastAcq<sup>®</sup> (TekConnect channels only)</b>	FastAcq <sup>®</sup> optimizes the instrument for analysis of dynamic signals and capture of infrequent events, capturing >300,000 waveforms per second on all TekConnect channels simultaneously, standalone configuration only
<b>FastFrame<sup>™</sup></b>	Acquisition memory divided into segments; maximum trigger rate >310,000 waveforms per second. Time of arrival recorded with each event. Frame finder tool helps to visually identify transients. TekConnect channels only, standalone configuration only
<b>Roll mode</b>	Scrolls sequential waveform points across the display in a right-to-left rolling motion. Works at sample rates up to 10 MS/s with a maximum record length of 40 MS. TekConnect channels only, standalone configuration only
<b>Waveform database</b>	Accumulates waveform data providing a three-dimensional array of amplitude, time, and counts. TekConnect channels only, standalone configuration only

<sup>4</sup> Sample rate on TekConnect channels can be varied down to 3.125 samples/second, resulting in a max RT setting of 6.55 Ms/div, with a record length of 205 M (requires 250 M or higher RL, 20XL option)

**Pinpoint® Trigger system**

**Trigger sensitivity (typical)**

**Internal DC coupled**

A-Event trigger, B-Event trigger	$\leq 5\%FS$ from DC to 50 MHz $\leq 7.5\%FS$ at 5 GHz $\leq 10\%FS$ at 10 GHz $\leq 15\%FS$ at 15 GHz $\leq 35\%FS$ at 20 GHz $\leq 50\%FS$ at 25 GHz
----------------------------------	---

**Aux input 50  $\Omega$  (external trigger)**

Auxiliary input	$100\text{ mV}_{pp}$ from DC to 1 GHz $175\text{ mV}_{pp}$ at 4 GHz $225\text{ mV}_{pp}$ at 8 GHz $325\text{ mV}_{pp}$ at 10 GHz $800\text{ mV}_{pp}$ at 12 GHz
-----------------	---

**Edge trigger sensitivity, non-DC-coupled modes (typical)**

All sources, positive or negative edge, for vertical scale settings  $\geq 10\text{ mV/div}$  and  $\leq 1\text{ V/div}$

Trigger Coupling	Sensitivity
NOISE REJ	$15\%FS$ from DC to 50 MHz $22.5\%$ at 5 GHz $30\%FS$ at 10 GHz $45\%FS$ at 15 GHz $100\%FS$ at 20 GHz
AC	Same as DC-coupled limits for frequencies $> 100\text{ Hz}$ , attenuates signals $< 100\text{ Hz}$
HF REJ	Same as DC-coupled limits for frequencies $< 20\text{ kHz}$ , attenuates signals $> 20\text{ kHz}$
LF REJ	Same as DC-coupled limits for frequencies $> 200\text{ kHz}$ , attenuates signals $< 200\text{ kHz}$
RF	Minimum hysteresis / High sensitivity  <b>A TRIG TekConnect</b> $2.5\% FS$ from DC to 50 MHz $2.5\% FS$ at 5 GHz $2.5\% FS$ at 10 GHz $5\% FS$ at 15 GHz $7.5\% FS$ at 20 GHz $12.5\% FS$ at 25 GHz  <b>B TRIG TekConnect</b> $2.5\% FS$ from DC to 50 MHz $2.5\% FS$ at 5 GHz $2.5\% FS$ at 10 GHz $5\% FS$ at 15 GHz $7.5\% FS$ at 20 GHz $20\% FS$ at 25 GHz  <b>A TRIG ATI</b> $2.5\% FS$ from DC to 50 MHz $2.5\% FS$ at 5 GHz $2.5\% FS$ at 10 GHz $5\% FS$ at 15 GHz $10\% FS$ at 20 GHz $23.5\% FS$ at 25 GHz  <b>B TRIG ATI</b> $2.5\% FS$ from DC to 50 MHz $2.5\% FS$ at 5 GHz $2.5\% FS$ at 10 GHz $5\% FS$ at 15 GHz $10\% FS$ at 20 GHz $22.5\% FS$ at 25 GHz

**Pinpoint® Trigger system**

A-Event and delayed B-Event trigger types

Standalone instrument	DPO73304SX		DPO77002SX	
Trigger type	TekConnect channel		ATI channel	TekConnect channel
Edge	X		X	X
Glitch	X		X	X
Width	X		X	X
Runt	X		X	X
Window	X		X	X
Timeout	X		X	X
Period/Frequency	X		X	X
Envelope	X		X	X
Transition	X		X	X
Logic Pattern	X			X
Setup/Hold	X			X
Low speed serial	X		X	X
Logic state	X			

Multi-unit configuration	DPO73304SX		DPO77002SX	
Trigger type	TekConnect channel		ATI channel	TekConnect channel
Edge	X		X	X
Glitch	X		X	X
Width	X		X	X

**Main trigger modes** Auto, Normal, and Single

**Trigger sequences** Main, Delayed by Time, Delayed by Events, Reset by Time, Reset by State, Reset by Transition. All sequences can include a separate horizontal delay after the trigger event to position the acquisition window in time

**Trigger coupling** DC, AC (attenuates <100 Hz)  
 HF Rej (attenuates >20 kHz)  
 LF Rej (attenuates <200 kHz)  
 Noise Reject (reduces sensitivity)  
 RF coupling (increases trigger sensitivity and bandwidth at the highest operating frequencies)

**Variable A-Event trigger holdoff range** 250 ns to 12 s + random holdoff

**Trigger level or threshold range**

Trigger Source	Range
Ch1, 2, 3, or 4	Full scale
Auxiliary input	±3.65 V
Line	0 V, Not settable

**Enhanced triggering** Enhanced triggering corrects the difference in timing between the trigger path and the acquired data path (supports all Pinpoint trigger types on both A- and B-Events except pattern trigger); Default On (user-selectable); Not available in FastAcq mode.

**Line trigger** Trigger on power line signal. Level fixed at 0 V.

**Pinpoint® Trigger system**

<b>Visual Trigger</b>	Requires Option VET
<b>Max number of areas</b>	8
<b>Area shapes</b>	Rectangle, Triangle, Trapezoid, Hexagon, user defined shapes (can have >40 vertices)
<b>Compatibility</b>	Visual Trigger qualification is compatible with all trigger types and all trigger sequences

**Trigger types**

Trigger type	Description
Edge	Positive or negative slope on any channel or front-panel auxiliary input. Coupling includes DC, AC, noise reject, HF reject, LF reject, and RF coupling.
Frequency/Period	Trigger on event that crosses threshold twice with same slope within or outside of selectable time limits. Slope may be positive, negative or either.
Glitch	Trigger on or reject glitches of positive, negative, or either polarity. Minimum glitch width is 40 ps (typical) with rearm time of 50 ps (<5 ns interval), 75 ps above 5 ns.
Pattern	Trigger when pattern goes false or stays true for specified period of time. Pattern (AND, OR, NAND, NOR) specified for four input channels.
Runt	Trigger on a pulse that crosses one threshold but fails to cross a second threshold before crossing the first again. Event can be time- or logic-qualified. Minimum runt width is 40 ps (typical) with rearm time of 50 ps
Setup/Hold	Trigger on violations of both setup time and hold time between clock and data present on any two input channels.
State	Any logical pattern of channels (1, 2, 3) clocked by edge on channel 4. Trigger on rising or falling clock edge.
Timeout	Trigger on an event which remains high, low, or either, for a specified time period. Selectable from 300 ps.
Transition	Trigger on pulse edge rates that are faster or slower than specified. Slope may be positive, negative, or either.
Width	Trigger on width of positive or negative pulse either within or out of selectable time limits (down to 40 ps).
Window	Trigger on an event that enters or exits a window defined by two user-adjustable thresholds. Event can be time or logic qualified.
Visual Trigger	Trigger when the Visual Trigger expression is satisfied.
Envelope	Qualification applied to Edge, Glitch, Width or Runt trigger such that trigger type is performed on the detected envelope of a modulated carrier. Carrier frequency 250 MHz to 15 GHz. Minimum burst width <20 ns, maximum gap between bursts <20 ns.

**Trigger modes**

**Trigger modes**

Trigger mode	Description
Trigger Delay by Events	1 to 2 billion events.
Trigger Delay by Time	3.2 ns to 3 million seconds.
B-Event Scan	B-Event Scan is an A to B trigger sequence that will trigger and capture burst event data of interest as defined in the B-Event Scan setup menu. Captured bits can be scanned in a sequential or randomized fashion, and alternatively the trigger can toggle between two successive B trigger events. Eye diagrams can be constructed with burst data acquired as a result of scanning B-Event.



## Waveform analysis

### Search and Mark Events

#### Search and Mark Events

Search for edges, glitches, or pulses of specified width. Any events found matching the search criteria are marked and placed in the Event table. The search can use positive/negative slopes or both on any channels.

When an event of interest is found, other similar events can be found using "Mark All Trigger Events in Record" in the Pinpoint trigger control windows.

The Event table summarizes all found events. All events are time stamped in reference to trigger position. Users can choose to stop acquisitions when an event is found.

### Waveform measurements

#### Waveform measurements

##### Automatic measurements

54, of which 8 can be displayed on-screen at any one time; measurement statistics, user-definable reference levels, measurement within gates isolating the specific occurrence within an acquisition to measure

The DPOJET Jitter and Eye Analysis application offers additional automated and advanced measurements such as jitter.

##### Amplitude related

Amplitude, High, Low, Maximum, Minimum, Peak-to-Peak, Mean, Cycle Mean, RMS, Cycle RMS, Positive Overshoot, Negative Overshoot

##### Time related

Rise Time, Fall Time, Positive Width, Negative Width, Positive Duty Cycle, Negative Duty Cycle, Period, Frequency, Delay

##### Combination

Area, Cycle Area, Phase, Burst Width

##### Histogram related

Waveform Count, Hits in Box, Peak Hits, Median, Maximum, Minimum, Peak-to-Peak, Mean ( $\mu$ ), Standard Deviation ( $\sigma$ ),  $\mu + 1\sigma$ ,  $\mu + 2\sigma$ ,  $\mu + 3\sigma$

#### Waveform processing/math

##### Algebraic expressions

Define extensive algebraic expressions including Waveforms, Scalars, User-adjustable Variables, and Results of Parametric Measurements e.g.  $(\text{Integral}(\text{CH1} - \text{Mean}(\text{CH1})) \times 1.414 \times \text{VAR1})$

##### Arithmetic

Add, Subtract, Multiply, Divide Waveforms and Scalars

##### Filtering function

User-definable filters. Users specify a file containing the coefficients of the filter. Several example filter files are provided

##### Frequency domain functions

Spectral Magnitude and Phase, Real and Imaginary Spectra

##### Mask function

Generates a Waveform Database pixel map from a sample waveform. Sample count can be defined

##### Math functions

Average, Invert, Integrate, Differentiate, Square Root, Exponential, Log 10, Log e, Abs, Ceiling, Floor, Min, Max, Sin, Cos, Tan, ASin, ACos, ATan, Sinh, Cosh, Tanh

##### Relational

Boolean result of comparison  $>$ ,  $<$ ,  $\geq$ ,  $\leq$ ,  $==$ ,  $!=$

##### Vertical units

Magnitude: Linear, dB, dBm Phase: Degrees, radians, group delay IRE and mV units

##### Window functions

Rectangular, Hamming, Hanning, Kaiser-Bessel, Blackman-Harris, Gaussian, Flattop2, Tek Exponential

##### Customized Functions using Math Plug-in Interface

An interface is provided to allow users to create their own custom math functions in MATLAB or Visual Studio

### Display system

**Color palettes** Normal, Green, Gray, Temperature, Spectral, and User-defined

**Format** YT, XY, XYZ

**Display resolution** 1024 horizontal  $\times$  768 vertical pixels (XGA)

**Display type** 6.5 in. liquid-crystal active-matrix color display with capacitive touch screen

**Horizontal divisions** 10

**Vertical divisions** 10

**Waveform styles** Vectors, Dots, Variable Persistence, Infinite Persistence

## Computer system and peripherals

<b>Operating system</b>	Microsoft Windows 7 Ultimate - 64 bit OS
<b>CPU</b>	INTEL CORE I7-4970S, 3.9 GHz, QUAD CORE
<b>System memory</b>	32 GB
<b>Solid state drive</b>	Removable, ≥900 GB capacity
<b>Mouse</b>	Optical wheel mouse, USB interface
<b>Keyboard</b>	USB interface

## Input-output ports

<b>Auxiliary trigger input characteristics and range</b>	50 Ω, ±5 V (DC plus peak AC)
<b>Auxiliary output logic polarity and functionality</b>	Default output is A trigger low true (a negative edge when the A trigger event occurs). You can also program the output to A trigger high true, B trigger low or high true, disabled, force high, and force low.
<b>Fast Edge output step amplitude and offset</b>	1200 mV differential into a 100 Ω load with a -300 mV common mode.
<b>External reference input frequency (typical)</b>	10 MHz, 100 MHz, 12.5 GHz The instrument scans for either 10 MHz or 100 MHz. 12.5 GHz supported on separate SMA input.
<b>12.5 GHz Clock In</b>	1.3 V <sub>p-p</sub> (6 dBm)
<b>B, C, D 12.5 GHz Clock Out (UltraSync)</b>	1.3 V <sub>p-p</sub> (6 dBm)
<b>Internal reference output voltage (typical)</b>	
<b>10 MHz Vout pk-pk</b>	> 800 mV peak-peak into 50 Ω > 1.6 V peak-peak into 1 MΩ (internally AC coupled).

### Input and output ports

<b>DVI-D Video port</b>	A female Digital Visual Interface (DVI-D) compatible port
<b>VGA port</b>	A female Video Graphics Array (VGA) compatible port
<b>DisplayPort</b>	Two connectors (primary, secondary) provide digital display interfaces
<b>PCIe</b>	PCIe ports to configure multi-instrument systems
<b>Trigger</b>	UltraSync trigger bus
<b>Keyboard and Mouse ports</b>	PS-2 compatible, instrument must be powered down to make connection
<b>LAN ports</b>	Two RJ-45 connectors (LAN1, LAN2), support 10BASE-T, 100BASE-TX, and Gigabit Ethernet
<b>External audio ports</b>	External audio jacks for microphone input and line output
<b>USB ports</b>	Four front panel USB 2.0 connectors Four rear panel USB 3.0/USB 2.0 connectors One rear panel USB device connector

## Data storage specifications

**Nonvolatile memory retention time (typical)** >20 years

**Solid state drive** Waveforms and setups are stored on the solid state drive.  
Solid state drive is a  $\geq 900$  GB solid state drive (removable).

## Power source

**Power consumption** <980 W, single instrument, maximum  
 $\leq 780$  W, single unit (typical)

**Source voltage and frequency** 100 V to 240 V<sub>RMS</sub>, 50/60 Hz  
115 V  $\pm 10\%$ , 400 Hz  
CAT II

## Mechanical specifications

### Dimensions

#### DPO70000SX models

157 mm (6.0 in) height 452 mm (17.8 in) width 553 mm (21.8 in) depth
--

#### DPO70000SX models, Rackmount configuration

177 mm (7.0 in) height 440 mm (19.75 in) width 523 mm (20.6 in) depth (from rack mounting ear to back of instrument)
--

### Weight

**DPO70000SX models** 19 kg (42 lbs) oscilloscope only

### Cooling

#### Required clearances

Fan-forced air circulation with no air filter	
Top	0 mm (0 in)
Bottom	6.35 mm (0.25 in) minimum or 0 mm (0 in) when standing on feet, flip stands down
Left side	76 mm (3 in)
Right side	76 mm (3 in)
Rear	0 mm (0 in) on rear feet

## Environmental specifications

### Temperature

**Operating** +5 °C to +45 °C

**Nonoperating** -20 °C to +60 °C

## Environmental specifications

### Humidity

#### Operating

8% to 80% relative humidity at up to +32 °C (+90 °F)

5% to 45% relative humidity above +32 °C (+90 °F) up to +45 °C (+113 °F), noncondensing, and is limited by a maximum wet-bulb temperature of +29.4 °C (+85 °F) (derates relative humidity to 32% at +45 °C (+113 °F))

#### Nonoperating

5% to 95% relative humidity at up to +30 °C (+86 °F),

5% to 45% relative humidity above +30 °C (+86 °F), up to +60 °C (+140 °F), noncondensing, and is limited by a maximum wet-bulb temperature of +29.4 °C (+85 °F) (derates relative humidity to 11% at +60 °C (+140 °F))

---

### Altitude

#### Operating

Up to 3,000 meters

#### Nonoperating

Up to 12,000 meters

---

## United States Government Baseline Testing

### United States Government Configuration Baseline (USGCB) Testing

Tektronix has tested the DPO70000SX Series oscilloscopes for compatibility with the security configuration for Information Technology products specified in the USGCB settings for Windows 7 and Internet Explorer

## Regulatory

### Regulatory

**Electromagnetic compatibility** 2004/108/EC; EN 61326-2-1

**Certifications** UL 61010-1, CSA 61010-1-04, LVD 2006/95/EC, EN61010-1, IEC 61010-1

## Ordering information

### Models

DPO77002SX	70 GHz ATI Performance Oscilloscope
DPO73304SX	33 GHz Digital Phosphor Oscilloscope

### Systems

The following DPS systems provide single-nomenclature ordering convenience for (2) instruments and a 1 meter UltraSync cable. The same options may be applied to these systems as with base models and the option will be included on both instruments. Both component instruments will have the same options associated with the system nomenclature when operating standalone.

DPS77004SX	70 GHz ATI Performance Oscilloscope System: 2 x 70 GHz, 200 GS/s or 4 x 33 GHz, 100 GS/s
DPS73308SX	33 GHz Digital Phosphor Oscilloscope System: 4 x 33 GHz, 100 GS/s or 8 x 23 GHz <sup>5</sup> , 50 GS/s

### Standard accessories

#### ATI channel accessories

Accessory	Tektronix part number
Deskew adapter (1.85M to 2.92F)	103-0488-00
ATI connector saver (1.85 mm)	103-0474-00
ATI protective cap	016-2101-00
Torque wrench	067-2787-00
Backing wrench	003-1942-00

#### Instrument accessories

Accessory	Tektronix part number
User manual -- depends on language option	071-3357-xx
Front protective cover	200-5337-00
PCIe Host Port protective plug	200-5344-00
2nd ethernet port plug	200-5389-00
50 $\Omega$ term on Fast Edge (2X)	015-1022-01
TCA-292D (5X) (3X on ATI instruments)	090-0044-00
Windows compatible keyboard	119-7275-xx
Windows compatible mouse	119-7054-xx
Static protection wrist strap	006-3415-05
Deskew cable (M2.92 to M2.92)	174-6793-00
Accessories pouch	016-2045-00
Best Practices manual	071-2989-04
ROHS info	071-2185-04
Calibration certification	001-1179-00
Cal cert envelope	006-8018-01
Power cord	

<sup>5</sup> Maximum of 4 channels displayed on-screen. Additional channels data available through program interface.

## Warranty

One-year warranty covering all parts and labor.

## Instrument options

### Record length options

Opt. 10XL	125 MS/Ch
Opt. 20XL	250 MS/Ch
Opt. 50XL	500 MS/Ch on 4 channels, 1 G/Ch on 2 channels

### Trigger and limit test options

Option	Description
Opt. VET	Visual trigger
Opt. ASM	Advanced Event Search and Mark
Opt. LT	Waveform limit testing

### Advanced analysis options

Option	Description
Opt DJA	Jitter and Eye Analysis Tools - Advanced (DPOJET)
Opt DJAN	DPOJET Noise, Jitter and Eye Analysis Tools (requires DJA)
Opt SDLA64	Serial Data Link Analysis Visualizer
Opt. VET	Visual Trigger
Opt. LT	Waveform Limit Testing

### Spectral and modulation analysis

Option	Description
Opt. SVE	SignalVu® Essentials - Vector Signal Analysis Software
Opt. SVA	AM/FM/PM Audio Signal Analysis (Requires Opt. SVE)
Opt. SVM	General Purpose Modulation Analysis (Requires Opt. SVE)
Opt. SVO	Flexible OFDM Analysis (Requires Opt. SVE)
Opt. SVP	Advanced Signal Analysis (including pulse measurements) (Requires Opt. SVE)
Opt. SVT	Frequency and Phase Settling Time Measurements (Requires Opt. SVE)
Opt. SV23	WLAN802.11a/b/g/j/p measurement application (requires Opt. SVE)
Opt. SV24	WLAN 802.11n measurement application (requires Opt SV23)
Opt. SV25	WLAN 802.11ac measurement application (requires Opt SV24)
Opt. SV27	SignalVu Bluetooth Basic LE TX SIG measurements

### Storage options

Option	Description
Opt. SSD	Additional Removable Disk - Solid State Drive

## Floating license options

Floating licenses offer an alternative method to manage your Tektronix asset. Floating licenses allow license-key enabled options to be easily moved among all your MSO/ DPO70000, DPO7000, and MSO/DPO5000 Series oscilloscopes. Floating licenses are available for the license-key enabled options listed below.

Check [www.tektronix.com/products/oscilloscopes/floating-licenses](http://www.tektronix.com/products/oscilloscopes/floating-licenses) for additional information about floating license options.

Option	Description
DPOFL-XL02	Extended record length - 31.25 M Samples/Ch
DPOFL-XL05	Extended record length - 62.5 M Samples/Ch
DPOFL-XL010	Extended record length - 125 M Samples/Ch
DPOFL-XL020	Extended record length - 250 M Samples/Ch
DPOFL-DJA	Jitter and Eye Analysis Tools - Advanced (DPOJET)
DPOFL-DJAN	DPOJET Noise, Jitter and Eye Analysis Tools
DPOFL-SDLA64	Serial Data Link Analysis Visualizer
DPOFL-VET	Visual Trigger
DPOFL-ASM	Advanced Event Search and Mark
DPOFL-LT	Waveform Limit Testing
DPOFL-SVE	SignalVu® Essentials - Vector Signal Analysis Software
DPOFL-SVA	AM/FM/PM Audio Signal Analysis (Requires Opt. SVE)
DPOFL-SVM	General Purpose Modulation Analysis (Requires Opt. SVE)
DPOFL-SVO	Flexible OFDM Analysis (Requires Opt. SVE)
DPOFL-SVP	Advanced Signal Analysis (including pulse measurements) (Requires Opt. SVE)
DPOFL-SVT	Frequency and Phase Settling Time Measurements (Requires Opt. SVE)
DPOFL-SV23	WLAN 802.11a/b/g/i/p measurement application (requires Opt. SVE)
DPOFL-SV24	WLAN 802.11n measurement application (requires Opt. SV23)
DPOFL-SV25	WLAN 802.11ac measurement application (requires Opt. SV24)
DPOFL-SV27	SignalVu Bluetooth Basic LE TX SIG measurements

## Upgrade options

The DPO70000SX Series instruments can be easily upgraded after initial time of purchase. To upgrade an existing DPO70000SX, order DPO-UP and an option listed below. For example, DPO-UP DJAN.

## Memory upgrades for DPO70000SX Series

<b>XL510</b>	Standard Configuration to Option 10XL Configuration
<b>XL520</b>	Standard Configuration to Option 20XL Configuration
<b>XL550</b>	Standard Configuration to Option 50XL Configuration
<b>XL1020</b>	Option 10XL Configuration to Option 20XL Configuration
<b>XL1050</b>	Option 10XL Configuration to Option 50XL Configuration
<b>XL2050</b>	Option 20XL Configuration to Option 50XL Configuration

## Trigger and search upgrades for DPO70000SX Series

<b>VETU</b>	Visual Trigger
<b>LT</b>	Waveform Limit Testing

### Advanced analysis upgrades for DPO70000SX Series

<b>DJA</b>	Jitter and Eye Analysis Tools - Advanced (DPOJET)
<b>DJAN</b>	DPOJET Noise, Jitter and Eye Analysis Tools (Requires DJA)
<b>SDLA64</b>	Serial Data Link Analysis Visualizer

### Spectral and modulation analysis upgrades for DPO70000SX Series

Option	Description
SVEU	SignalVu® Essentials - Vector Signal Analysis Software
SVA	AM/FM/PM Audio Signal Analysis (Requires Opt. SVE, SVEH, or SVEU)
SVM	General Purpose Modulation Analysis (Requires Opt. SVE, SVEH, or SVEU)
SVO	Flexible OFDM Analysis (Requires Opt. SVE, SVEH, or SVEU)
SVP	Advanced Pulsed Signal Analysis including Measurements (Requires Opt. SVE, SVEH, or SVEU)
SVT	Frequency and Phase Settling Time Measurements (Requires Opt. SVE, SVEH, or SVEU)
SV23	WLAN802.11a/b/g/j/p measurement application (Requires Opt. SVE, SVEH, or SVEU)
SV24	WLAN 802.11n measurement application (requires Opt SV23)
SV25	WLAN 802.11ac measurement application (requires Opt SV24)
SV27	SignalVu Bluetooth Basic LE TX SIG measurements

### Other upgrades for DPO70000SX Series

<b>IF</b>	Upgrade Installation Service
<b>SSD</b>	Spare Solid State Drive

### Investment protection options

As signals get faster and new standards are developed, your investment in an DPO70000SX Series instrument can evolve with your needs. You can upgrade the bandwidth of the unit you own today. You can take advantage of DPO70000SX series performance improvements by upgrading your existing unit to a new series. Contact your local Tektronix representative to discuss the full range of options available to ensure your DPO70000SX series oscilloscope has the tools you need for your next project.

### Power plug options

<b>Opt. A0</b>	North America power plug (115 V, 60 Hz)
<b>Opt. A1</b>	Universal Euro power plug (220 V, 50 Hz)
<b>Opt. A2</b>	United Kingdom power plug (240 V, 50 Hz)
<b>Opt. A3</b>	Australia power plug (240 V, 50 Hz)
<b>Opt. A5</b>	Switzerland power plug (220 V, 50 Hz)
<b>Opt. A6</b>	Japan power plug (100 V, 50/60 Hz)
<b>Opt. A10</b>	China power plug (50 Hz)
<b>Opt. A11</b>	India power plug (50 Hz)
<b>Opt. A12</b>	Brazil power plug (60 Hz)
<b>Opt. A99</b>	No power cord



## Service options

Opt. C3	Calibration Service 3 Years
Opt. C5	Calibration Service 5 Years
Opt. D1	Calibration Data Report
Opt. D3	Calibration Data Report 3 Years (with Opt. C3)
Opt. D5	Calibration Data Report 5 Years (with Opt. C5)
Opt. G3	Complete Care 3 Years (includes loaner, scheduled calibration, and more)
Opt. G5	Complete Care 5 Years (includes loaner, scheduled calibration, and more)
Opt. IF	Upgrade Installation Service
Opt. R3	Repair Service 3 Years (including warranty)
Opt. R5	Repair Service 5 Years (including warranty)

## Recommended accessories

### Probes

P7633	33 GHz Low Noise TriMode® Probe
P7630	30 GHz Low Noise TriMode® Probe
P7625	25 GHz Low Noise TriMode® Probe
P7520A	25 GHz TriMode® probe
P7313SMA	13 GHz TriMode® differential SMA probe
P6251	DC to 1 GHz, 42 V, differential probe (requires TCA-BNC adapter)
TCPA300/TCPA400 Series	Current measurement systems
P5200/P5205/P5210	High-voltage differential probes
067-2431-xx	Probe Deskew Fixture for SMA or solder-down connections (up to 30 GHz)
067-0484-xx	Analog Probe Calibration and Deskew Fixture (4 GHz)
067-1586-xx	Analog Probe Deskew Fixture (>4 GHz)
067-1686-xx	Power Deskew Fixture

### Adapters

TCA-1MEG	TekConnect® high-impedance buffer amplifier. Includes P6139A passive probe
TCA-292D	TekConnect® to 2.92 mm adapter (33 GHz bandwidth)
TCA-BNC	TekConnect® to BNC adapter
TCA-N	TekConnect® to N adapter
TCA-VPI50	50 Ω TekVPI to TekConnect adapter
TCA75	8 GHz precision TekConnect® 75 Ω to 50 Ω adapter with 75 Ω BNC input connector

# Datasheet

## Other

<b>016-2095-xx</b>	Rackmount Kit
<b>016-2102-xx</b>	SSD mounting kit (front of instrument rackmount tray)
<b>077-0076-xx</b>	Service Manual, pdf on hard drive
<b>016-2104-00</b>	Transit Case (carbon fiber)
<b>K4000</b>	Oscilloscope Cart
<b>DPO7AFP</b>	Auxiliary Front Panel
<b>DPO7USYNC 1M</b>	1 meter UltraSync cable
<b>DPO7USYNC 2M</b>	2 meter UltraSync cable



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.



Product Area Assessed: The planning, design/development and manufacture of electronic Test and Measurement instruments.

**ASEAN / Australasia** (65) 6356 3900  
**Belgium** 00800 2255 4835\*  
**Central East Europe and the Baltics** +41 52 675 3777  
**Finland** +41 52 675 3777  
**Hong Kong** 400 820 5835  
**Japan** 81 (3) 6714 3010  
**Middle East, Asia, and North Africa** +41 52 675 3777  
**People's Republic of China** 400 820 5835  
**Republic of Korea** +822 6917 5084, 822 6917 5080  
**Spain** 00800 2255 4835\*  
**Taiwan** 886 (2) 2656 6688

**Austria** 00800 2255 4835\*  
**Brazil** +55 (11) 3759 7627  
**Central Europe & Greece** +41 52 675 3777  
**France** 00800 2255 4835\*  
**India** 000 800 650 1835  
**Luxembourg** +41 52 675 3777  
**The Netherlands** 00800 2255 4835\*  
**Poland** +41 52 675 3777  
**Russia & CIS** +7 (495) 6647564  
**Sweden** 00800 2255 4835\*  
**United Kingdom & Ireland** 00800 2255 4835\*

**Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777  
**Canada** 1 800 833 9200  
**Denmark** +45 80 88 1401  
**Germany** 00800 2255 4835\*  
**Italy** 00800 2255 4835\*  
**Mexico, Central/South America & Caribbean** 52 (55) 56 04 50 90  
**Norway** 800 16098  
**Portugal** 80 08 12370  
**South Africa** +41 52 675 3777  
**Switzerland** 00800 2255 4835\*  
**USA** 1 800 833 9200

\* European toll-free number. If not accessible, call: +41 52 675 3777

**For Further Information.** Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit [www.tektronix.com](http://www.tektronix.com).

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



13 Aug 2015 55W-30662-3

[www.tektronix.com](http://www.tektronix.com)

**Tektronix**<sup>®</sup>

